




**Functional Description**

**Frame Format**

On an Ethernet communication network, information is transmitted and received in packets or frames. An Ethernet frame consists of a preamble, two address fields, a type field, a data field, and a frame check sequence (FCS). Each field has a specific format which is described in detail below. An Ethernet frame has a minimum length of 64 bytes and a maximum length of 1518 bytes exclusive of the preamble. The Ethernet frame format is shown below.

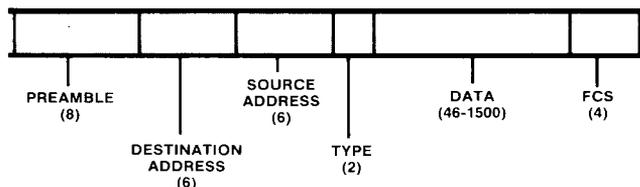

**NOTE:**  
Field length in bytes in parentheses.

**Preamble:** The preamble is a 64-bit field consisting of 62 alternating "1"s and "0"s followed by a "11" End-of-Preamble indicator.

**Destination Address:** The Destination Address is a 6-byte field containing either a specific Station Address, a Broadcast Address, or a Multicast Address to which this frame is directed.

**Source Address:** The Source Address is a 6-byte field containing the specific Station Address from which this frame originated.

**Type Field:** The Type Field consists of two bytes. This field is uninterpreted at the Data Link Layer, and is passed through the EDLC chip to be handled at the Client Layer.

**Data Field:** The Data Field consists of 46 to 1500 bytes of information which are fully transparent in the sense that any arbitrary sequence of bytes may occur.


**Frame Check Sequence:** The Frame Check Sequence (FCS) field is a 32-bit cyclic redundancy check (CRC) value computed as a function of the Destination Address Field, Source Address Field, Type Field, and Data Field. The FCS is appended to each transmitted frame, and used at reception to determine if the received frame is valid.

**Transmitting**

The transmit data stream consists of the Preamble, four information fields, and the FCS which is computed in real time by the EDLC chip and automatically appended to the frame at the end of the serial data. The Preamble is also generated by the EDLC chip and transmitted immediately prior to the Destination Address. Destination Address, Source Address, Type Field and Data Field are prepared in the buffer memory prior to initiating transmission. The EDLC chip encapsulates these fields into an Ethernet frame by inserting a preamble prior to these information fields and appending a CRC after the information fields.

**Transmission Initiation/Deferral**

The Ethernet node initiates a transmission by storing the entire information content of the frame to be transmitted in an external buffer memory, and then transferring initial frame bytes to the EDLC Transmit FIFO. "Transmit-buffer to FIFO" transfers are coordinated via the TxWR and TxRDY handshake interface, i.e., bytes are written to the FIFO via TxWR only when TxRDY is HIGH. Actual transmission of the data onto the network will only occur if the network has not been busy for the minimum defer time (9.6 μs) and any Backoff time requirements have been satisfied. When transmission begins, the EDLC chip activates the transmit enable (TxEN) line concurrently with the transmission of the first bit of the Preamble and keeps it active for the duration of the transmission.

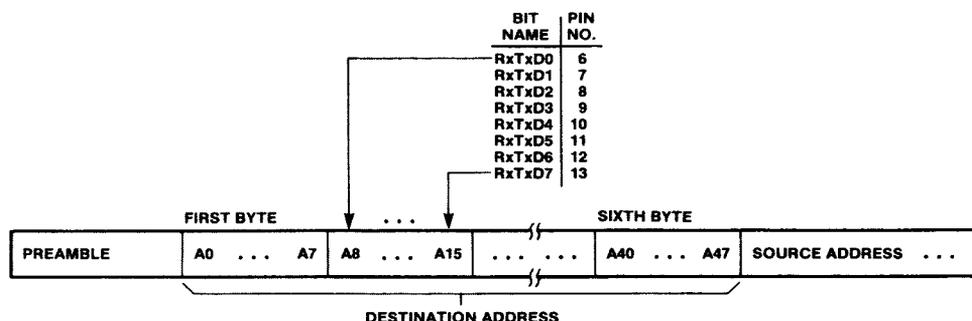

BITS WITHIN A BYTE ARE TRANSMITTED/RECEIVED BIT NO. "0" FIRST THROUGH BIT NO. "7" LAST.

Figure 1. Bit Serialization/Deserialization

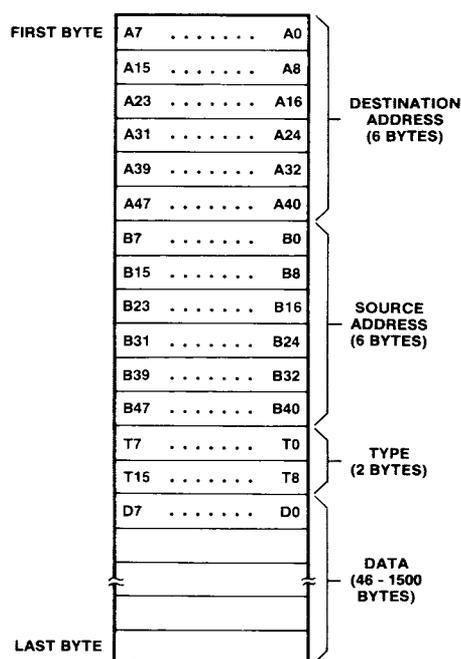


Figure 2. Typical Frame Buffer Format for Byte-Organized Memory

### Collision

When concurrent transmissions from two or more Ethernet nodes occur (collision), the EDLC chip halts the transmission of the data bytes in the Transmit FIFO and transmits a Jam pattern consisting of 55555555 hex. At the end of the Jam transmission, the EDLC chip issues a TxRET signal to the CPU, and begins the Backoff wait period.

To reinitiate transmission, the initial bytes of the frame information fields must be reloaded into the EDLC Transmit FIFO. The TxRET is used to indicate to the buffer manager the need for frame reinitialization. The reloading of the Transmit FIFO may be done prior to the Backoff interval elapsing, so that no additional delay need be incurred to retransmission.

Scheduling of retransmission is determined by a controlled randomization process called Truncated Binary Exponential Backoff. The EDLC chip waits a random interval between 0 and  $2^K$  slot times ( $51.2 \mu\text{s}$  per slot time) before attempting retransmission, where "K" is the current transmission attempt number (not to exceed 10).

When 16 consecutive attempts have been made at transmission and all have been terminated due to collision, the EDLC Transmit Control sets an error status bit and issues an interrupt to the CPU if enabled.

### Terminating Transmission

Transmission terminates under the following conditions:

**Normal:** The frame has been transmitted successfully without contention. Loading of the last data byte into the Transmit FIFO is signaled to the EDLC chip by activation of the RxTxEOF signal concurrently with the last byte of data loaded into the Transmit FIFO. This line acts as a ninth bit in the Transmit FIFO. When this last byte is serialized, the CRC is appended and transmitted concluding frame transmission. The Transmission Successful bit of the Transmit Status Register will be set by a normal termination.

**Collision:** Transmission attempted by two or more Ethernet nodes. The Jam sequence is transmitted, the Collision status bit is set, the TxRET signal is generated, and the Backoff interval begun.

**Underflow:** Transmit data is not ready when needed for transmission. Once transmission has begun, the EDLC chip on average requires one transmit byte every 800 ns in order to avoid Transmit FIFO underflow (starvation). If this condition occurs, the EDLC chip terminates the transmission, issues a TxRET signal, and sets the Transmit-Underflow status bit.

**16 Transmission Attempts:** If a Collision occurs for the sixteenth consecutive time, the 16-Transmission-Attempts status bit is set, the Collision status bit is set, the TxRET signal is generated, and the Backoff interval begun. The counter that keeps track of the number of collisions is modulo 16 and therefore rolls over on the 17th collision.

At the completion of every transmission or retransmission, new status information is loaded into the Transmit Status Register. Dependent upon the bits enabled in the Transmit Command Register, an interrupt will be generated for the just completed transmission. In both collision and underflow the TxRET signal is activated.

### Receiving

The EDLC chip is continuously monitoring the network. When activity is recognized via the Carrier Sense (CSN) line going active, the EDLC chip synchronizes itself to the incoming data stream during the Preamble, and then examines the destination address field of the frame. Depending on the Address Match Mode specified, the EDLC chip will either recognize the frame as being addressed to itself in a general or specific fashion or abort the frame reception.

### Preamble Processing

The EDLC chip recognizes activity on the Ethernet via the Carrier Sense line. The Preamble is normally 64

bits (8 bytes) long. The Preamble consists of a sequence of 62 alternating "1"s and "0"s followed by "11", with the frame information fields immediately following. In order for the decoder phase-lock to occur, the EDLC chip waits 8 bit times before looking for the "11" end of preamble indicator. If the EDLC chip receives a "00" before receiving the "11" in the Preamble, an error condition has occurred. The frame is not received, and the EDLC chip begins monitoring the network for a carrier again.

#### Address Matching

Ethernet addresses consist of two 6-byte fields. The first bit of the address signifies whether it is a Station Address or a Multicast/Broadcast Address.

First Bit	Address
0	Station Address (Physical)
1	Multicast/Broadcast Address (logical)

Address matching occurs as follows:

**Station Address:** All destination address bytes must match the corresponding bytes found in the Station Address Register.

**Multicast Address:** If the first bit of the incoming address is a 1 and the EDLC chip is programmed to accept Multicast Addresses, the frame is received.

**Broadcast Address:** The six incoming destination address bytes must all be FF hex. If the EDLC chip is programmed to accept Broadcast or Multicast Addresses the frame will be received.

If the incoming frame is addressed to the EDLC chip specifically (Destination Address matches the contents of the Station Address Register), or is of general or group interest (Broadcast or Multicast Address), the EDLC chip will pass the frame exclusive of Preamble and FCS to the CPU buffer and indicate any error conditions at the end of the frame. If, however, the address does not match, as soon as the mismatch is recognized the EDLC chip will terminate reception and issue an RxDC if transfers to the CPU buffer have been initiated.

The EDLC chip may be programmed via the Match Mode bits of the Receive Command Register to ignore all frames (Disable Receiver), accept all frames (Promiscuous mode), accept frames with the proper Station Address or the Broadcast Address (Station/Broadcast), or accept all frames with the proper Station Address, the Broadcast Address, or all Multicast Addresses (Station/Broadcast/Multicast).

#### Terminating Reception

Reception is terminated when either of the following conditions occur:

**Carrier Sense Inactive:** Indicates that traffic is no longer present on the Ethernet cable.

**Overflow:** The host node for some reason is not able to empty the Receive FIFO as rapidly as it is filled, and an error occurs as frame data is lost. On average the Receive FIFO must be serviced every 800 ns to avoid this conditions.

#### Frame Reception Conditions

Upon terminating reception, the EDLC chip will determine the status of the received frame and conditionally load it into the Receive Status Register. An interrupt will be issued if the appropriate conditions as specified in the Receive Command Register are present. The EDLC chip may report the following conditions at the end of frame reception:

**Overflow:** The EDLC internal Receive FIFO overflows.

**Dribble Error:** Carrier Sense did not go inactive on a receive data byte boundary.

**CRC Error:** The 32-bit CRC transmitted with the frame does not match that calculated upon reception.

**Short Frame:** A frame containing less than 64 bytes of information was received (including FCS).

**Good Frame:** A frame is received that does not have a CRC error, Shortframe, or Overflow condition.

#### System Interface

The EDLC chip system interface consists of two independent busses and respective control signals. Data is read and written over the Receive/Transmit Data Bus RxTxD (0-7). These transfers are controlled by the TxRDY and  $\overline{\text{TxWR}}$  signals for transmitted data, and RxRDY and  $\overline{\text{RxRD}}$  for received data. All Commands and Station Addresses are written, and all status read over a separate Command/Status Bus CdSt (0-7). These transfers are controlled by the  $\overline{\text{CS}}$ ,  $\overline{\text{RD}}$ ,  $\overline{\text{WR}}$ , and A0-A2 signals. The EDLC chip's command and status registers may be accessed at any time. However, it is recommended that writing to the command register be done only during interframe gaps.

With the exception of the two Match Mode bits in the Receive Command Register, all bits in both command registers are interrupt enable bits. Changing the interrupt enable bits during frame transmission does not affect the frame integrity. Asynchronous error events, however, e.g., overflow, underflow, etc., may cause chip operation to vary, if their corresponding enable bits are being altered at the same time.

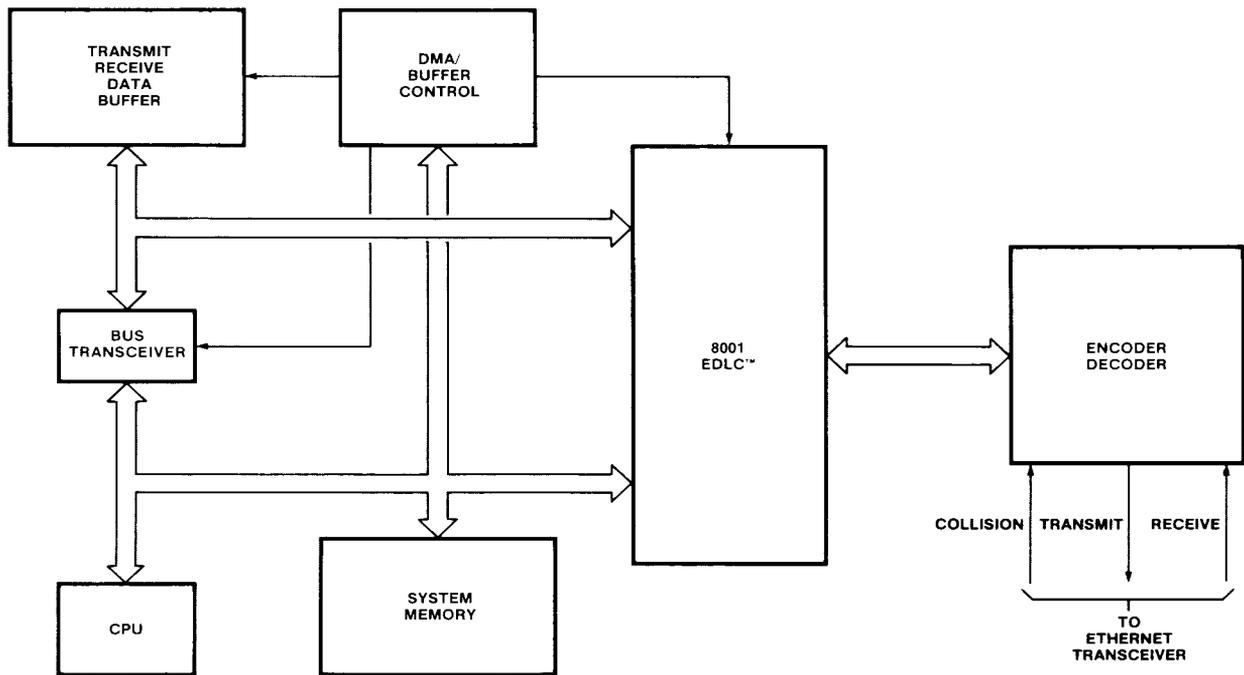


Figure 3. Typical Ethernet Node Configuration

Reading the status registers may also occur at any time during transmission or reception. It is recommended, however, that to ensure stable status values that status registers be read during the interframe gap.

**Internal Register Addressing**

	Register Address			Register Description	
	A2	A1	A0	Read	Write
0	0	0	0	—	Station Addr 0
1	0	0	1	—	Station Addr 1
2	0	1	0	—	Station Addr 2
3	0	1	1	—	Station Addr 3
4	1	0	0	—	Station Addr 4
5	1	0	1	—	Station Addr 5
6	1	1	0	Rx Status	Rx Command
7	1	1	1	Tx Status	Tx Command

Status registers are read only registers. Command and Station Address registers are write only registers. Access to these registers is via the CPU interface: Control signals  $\overline{CS}$ ,  $\overline{RD}$ ,  $\overline{WR}$ , and the Command/Status Data Bus CdSt (0-7).

**Station Address Register**

The Station Address Register is 6 bytes in length. The contents may be written in any order, with bit "0" of byte "0" corresponding to the first bit received in the data stream, and indicating whether the address is physical or logical. Bit 7 of station address byte 5 is compared to the last bit of the received destination address. The Station Address should be programmed prior to enabling the receiver.

**Transmit Command Register**


The Transmit Command Register is an interrupt mask register, which provides for control of the conditions allowed to generate transmit interrupts. Each of the four least significant bits of the register may be individually set or cleared. When set, the occurrence of the associated condition will cause an interrupt to be generated. The four specific conditions for which interrupts may be generated are:

- Underflow
- Collision
- 16 Collisions
- Transmission Successful

The interrupt signal INT will be set when one or more of the specified transmission termination conditions occurs and the associated command bit has been set. The interrupt signal INT will be cleared when the Transmit Status Register is read.

All bits of the Transmit Command Register are cleared upon chip reset.

### Transmit Command Register Format

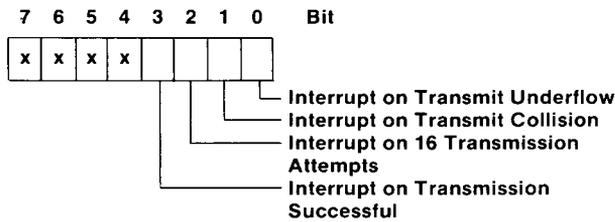


Transmission Successful is set only on the successful transmission or retransmission of a frame.

### Transmit Status Register

The Transmit Status Register is loaded at the conclusion of each frame transmission or retransmission attempt. It provides for the reporting of both the normal and error termination conditions of each transmission.

All bits of the Transmit Status Register are cleared upon chip reset.


### Transmit Status Register Format

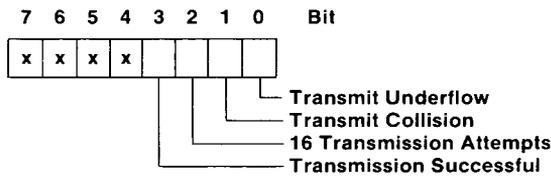

### Receive Command Register

The Receive Command Register has two primary functions, it specifies the Address Match Mode, and it specifies Frames-of-Interest. i.e. frames whose arrival must be communicated to the CPU via interrupts and status register updates. Frames-of-Interest are frames whose status must be saved for inspection, even at the expense of losing subsequent frames.

### Receive Command Register Format

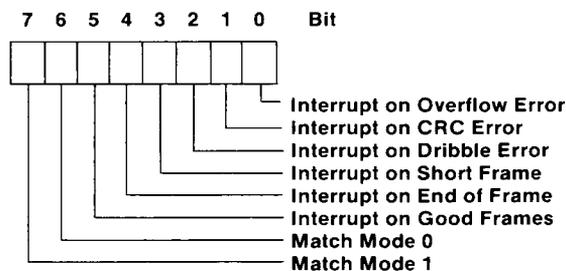

Bits 0-5 specify Interrupt and Frame-of-Interest when set. Bit 4, End of Frame, specifies any type of frame except overflow.

### Match Mode Definition

	Match Mode 1	Match Mode 0	Function
0	0	0	Receiver Disable
1	0	1	Receive All Frames
2	1	0	Receive Station or Broadcast Frames
3	1	1	Receive Station, Broadcast/Multicast Frames

Changing the receive Match Mode bits during frame reception may change chip operation and give unpredictable results.


### Interrupt Enable and Frames-of-Interest

Bits 0-5 when set specify interrupt generation on occurrence of the corresponding frame reception condition. They also specify the corresponding types of frames to be Frames-of-Interest for use by the Receive Status Register to control status loading.

### Receive Status Register

The Receive Status Register is normally loaded with the status of each received frame when the frame has been received or frame reception has been terminated due to an error condition. In addition, this register contains the Old/New Status bit which is set when the Receive Status Register is read or the chip is reset, and cleared only when new status is loaded for a Frame-of-Interest (as defined by bits 0-5 of the Receive Command Register). All other bits are cleared upon chip reset.

### Receive Status Register Format

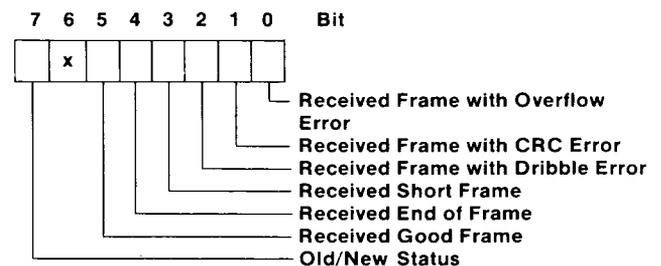

The Old/New Status bit write-protects the Receive Status Register while it contains unread status for a Frame-of-Interest. When this bit is zero, the register is write-protected. The Old/New Status bit is cleared whenever the status of a new Frame-of-Interest is loaded into the Receive Status Register and is set after that status is read. When zero, it indicates "new status for a Frame-of-Interest".

Thus the status of any frame received following the reception of a Frame-of-Interest will not be loaded into the Receive Status Register unless the previous status has been read. If any following frame is received before the status of the previous Frame-of-Interest has been read, the new status will not be loaded, the Receive Discard (RxDC) signal will be issued and the Receive FIFO will be cleared.

With this one exception caused by a write-protect condition, the status of each frame is always loaded into the Receive Status Register on completion of reception.

Any frame received will cause an interrupt to be generated if the corresponding Interrupt Enable bit is set. This interrupt is reset upon reading the Receive Status Register.

These conditions ensure that a maximum number of good frames are received and retained.

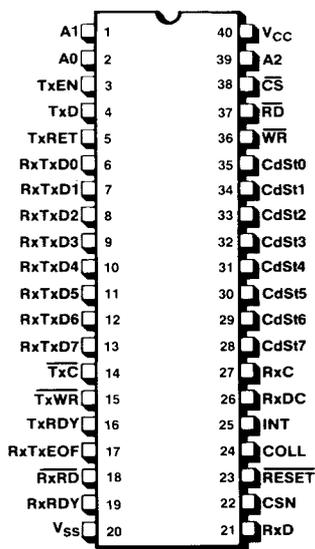


Figure 4. Pin Configuration

## Pin Description

The EDLC chip has four groups of interface signals:

- Power Supply
- Encoder/Decoder
- Data Buffer
- Command/Status

### Power Supply

V<sub>CC</sub> ..... +5V  
V<sub>SS</sub> ..... Ground

### Encoder/Decoder Interface

**Tx̄C Transmit Clock (Input):** 10 MHz, 50% duty cycle transmit clock used to synchronize the transmit data

from the EDLC chip to the encoder. This clock runs continuously, and is asynchronous to Rx̄C.

**TxD Transmit Data (Output):** Serial data output to the encoder. Active HIGH.

**TxEN Transmit Enable (Output):** This signal is used to activate the encoder. It becomes active when the first bit of the Preamble is transmitted and inactive when the last bit of the frame is transmitted. Active HIGH and cleared by Reset.

**RxC Receive Clock (Input):** 10 MHz, 50% duty cycle nominal. The receive clock is used to synchronize incoming data to the EDLC chip from the decoder. This clock runs continuously, and is asynchronous to Tx̄C.

**RxD Receive Data (Input):** Serial input data to the EDLC chip from the decoder. Active HIGH.

**CSN Carrier Sense (Input):** Indicates traffic on the coaxial cable to the EDLC chip. Becomes active with the first bit of the Preamble received, and inactive one bit time after the last bit of the frame is received. Active HIGH.

**COLL Collision (Input):** Indicates transmission contention on the Ethernet cable. Once activated must be active until EDLC chip terminates Jam pattern transmission to assure recognition. Active High.

### Data Buffer Interface

**RxTx̄D (0-7) Receive/Transmit Data Bus (I/O):** Carries Receive/Transmit data byte from/to the EDLC chip Receive/Transmit FIFOs. Active HIGH.

**RxTx̄EOF Receive/Transmit End of Frame (I/O):** Indicates last byte of data on the Receive/Transmit Data Bus. Effectively a ninth bit in the FIFOs with identical timing to RxTx̄D (0-7). Active HIGH.

**RxRDY Receive Ready (Output):** Indicates at least one byte of received data is available in the Receive FIFO. Rx̄RD should not be activated if this pin is LOW. Active HIGH and cleared by Reset.

**Rx̄RD Receive Read Strobe (Input):** Enables transfer of received data from the EDLC Receive FIFO to the RxTx̄D Bus. Data is valid from the EDLC Receive FIFO at the RxTx̄D pins on the rising edge of this signal. This signal should not be activated unless RxRDY is high. Active LOW.

**Rx̄DC Receive Discard (Output):** Asserted when one of the following errors occur: (1) Receive FIFO overflow, (2) receive error renders current frame unusable, (3) receive frame address non-match or (4) current frame status lost because previous status was not read.

Rx̄DC acts internally to clear the Receive FIFO.

**TxRDY Transmit Ready (Output):** Indicates that the EDLC Transmit FIFO has space available for transmit data bytes. Forced inactive during Reset. Active HIGH. Goes high after Reset.

**TxWR Transmit Write (Input):** Synchronizes data transfer from the RxTxD Bus to the Transmit FIFO. Data is written to the FIFO on the rising edge of this signal. This signal should not be active unless TxRDY is high. Active LOW.

**TxRET Transmit Retransmit (Output):** Asserted whenever either transmit underflow or transmit collision conditions occur. It is nominally 800 ns in width. Active HIGH. Asserted by Reset.

TxRET clears the internal Transmit FIFO.

#### Command/Status Interface

**CdSt (0-7) Command/Status Data Bus (I/O):** These lines carry commands and status as well as station address initialization information between the EDLC chip and CPU. These lines are nominally high impedance until activated by  $\overline{CS}$  and  $\overline{RD}$  being simultaneously active. Active HIGH.

**A0-A2 Address (0-2) (Input):** Address lines to select the proper EDLC internal registers for reading or writing. Active HIGH.

**$\overline{CS}$  Chip Select (Input):** Chip Select input, must be active in conjunction with  $\overline{RD}$  or  $\overline{WR}$  to successfully access the EDLC internal registers. Active LOW.

**$\overline{RD}$  Read (Input):** Enables reading of the EDLC internal registers in conjunction with  $\overline{CS}$ . Data from the internal registers is enabled via the falling edge of  $\overline{RD}$  and is valid on the rising edge of the signal. Active LOW.

**$\overline{WR}$  Write (Input):** Enables writing of the EDLC internal registers in conjunction with  $\overline{CS}$ . Write data on the CdSt (0-7) data lines must be set up relative to the rising edge of the signal. Active LOW.

**DC Characteristics**  $T_A = 0^\circ\text{C}$  to  $70^\circ\text{C}$ ,  $V_{CC} = 4.75\text{ V}$  to  $5.25\text{ V}$

Symbol	Parameter	Limits <sup>[1]</sup>			Units	Condition
		Min.	Typ.	Max.		
I <sub>IN</sub>	Input Leakage Current			10	μA	V <sub>IN</sub> = 0.45 V to 5.25 V
I <sub>O</sub>	Output Leakage Current			10	μA	V <sub>OUT</sub> = 0.45 V to 5.25 V
I <sub>CC</sub>	V <sub>CC</sub> Current		150	200	mA	
V <sub>CH</sub>	Clock Input High Voltage	3.5		V <sub>CC</sub> + 1	V	
V <sub>CL</sub>	Clock Input Low Voltage			0.8	V	
V <sub>IL</sub>	Input Low Voltage			0.8	V	
V <sub>IH</sub>	Input High Voltage	2.0		V <sub>CC</sub> + 1	V	
V <sub>OL</sub>	Output Low Voltage			0.4	V	I <sub>OL</sub> = 2.1 mA
V <sub>OH</sub>	Output High Voltage	2.4			V	I <sub>OH</sub> = -400 μA

NOTE: 1. Typical values are for  $T_A = 25^\circ\text{C}$  and nominal supply voltages.

**INT Interrupt (Output):** Enabled as outlined above by a variety of transmit and receive conditions. Remains active until the status register containing the reason for the interrupt is read. Active HIGH.

**$\overline{RESET}$  (Input):** Initializes control logic, clears command registers, clears the Transmit Status Register, clears bits 0-5 of the Receive Status Register, sets the Old/New Status bit (bit 7 of the Receive Status Register), asserts RxDC and TxRET and clears the Receive and Transmit FIFOs. In addition, TxRDY is forced low during a reset. TxRDY goes high when  $\overline{RESET}$  goes high, indicating the EDLC chip is ready to transmit.  $\overline{RESET}$  is active LOW.

#### Absolute Maximum Ratings

Ambient Temperature	
Under Bias	-10°C to +80°C
Storage Temperature	-65°C to +150°C
All Input or Output Voltages with Respect to Ground	+7 V to -0.5 V
Package Maximum	
Power Dissipation	1.5 Watts

#### Operating Conditions

Ambient Temperature Range	0°C to 70°C
V <sub>CC</sub> Power Supply	4.75 V to 5.25 V

#### Capacitance

$T_A = 25^\circ\text{C}$ ,  $F_C = 1\text{ MHz}$

Symbol	Parameter	Maximum	Condition
C <sub>IN</sub>	Input Capacitance	15 pF	V <sub>IN</sub> = 0 V
C <sub>I/O</sub>	I/O Capacitance	15 pF	V <sub>I/O</sub> = 0 V

#### AC Test Conditions

Output Load: 1 Schottky TTL Gate + CL = 100 pF  
(All pins except TxEN, TxD)  
TxEN, TxD Load: 1 Schottky TTL Gate + CL = 35 pF  
Input Pulse Level: 0.8 V to 2.0 V  
Timing Reference Level: 1.5 V

**A.C. Characteristics**  $T_A = 0^\circ\text{C}$  to  $70^\circ\text{C}$ ,  $V_{CC} = 4.75\text{ V}$  to  $5.25\text{ V}$ 


Symbol <sup>[5]</sup>	Parameter	Limits			Units (ns)	Condition
		Min.	Typ.	Max.		
<b>DATA AND COMMAND/STATUS INTERFACE TIMING</b>						
TDBD	RxTx/CdSt Bus Data Delay			150	ns	
TDBR	RxTx/CdSt Bus Release Delay	10			ns	
TDBS	RxTx/CdSt Bus Seizure Delay	10		150	ns	
TDRY	RxRDY/TxRDY Clear Delay			100	ns	
<i>THAR</i>	$A_{0-2}/\overline{\text{CS}}$ Hold	10			ns	
<i>THDA</i>	RxTx/CdSt Bus Hold	0			ns	
<i>THRW</i>	$\overline{\text{RxRD}}/\overline{\text{TxWR}}$ Hold	0			ns	
<i>TSAR</i>	$A_{0-2}/\overline{\text{CS}}$ Setup	0			ns	
<i>TSCS</i>	CdSt Bus Setup	10			ns	
<i>TSRT</i>	RxTx Bus Setup	100			ns	
<i>TWCH</i>	$\overline{\text{RxRD}}/\overline{\text{TxWR}}/\overline{\text{RD}}/\overline{\text{WR}}$ High Width	100			ns	
<i>TWCL</i>	$\overline{\text{RxRD}}/\overline{\text{TxWR}}/\overline{\text{RD}}/\overline{\text{WR}}$ Low Width	200			ns	
TWRY	RxRDY/TxRDY Low Width	35		100	ns	

<b>SERIAL TRANSMIT AND RECEIVE INTERFACE TIMING</b>						
TDDC	RxDC Set Delay	100			ns	Note 1
TDIC	INT Clear Delay			150	ns	
TDRE	TxRET Set Delay	1200			ns	Note 3
TDRI	Receive INT Delay	100			ns	Note 2
TDTD	TxD/TxEN Delay	20		60	ns	CI = 35 pF
TDTI	Transmit INT Delay	1200			ns	Note 4
<i>THCO</i>	COLL Hold	0			ns	
<i>THRD</i>	RxD Hold	20			ns	
<i>TPCK</i>	RxC/ $\overline{\text{TxC}}$ Clock Period	95		1000	ns	
<i>TSRD</i>	RxD Setup	30			ns	
TWDC	RxDC High Width	600			ns	
<i>TWRC</i>	RxC High/Low Width	45			ns	
TWRE	TxRET High Width	600			ns	
<i>TWRS</i>	$\overline{\text{RESET}}$ Low Width	10,000			ns	
<i>TWTC</i>	$\overline{\text{TxC}}$ High/Low Width	45			ns	


**NOTES:**

- For frame reception with Shortframe or CRC Error. If frame reception is terminated due to Overflow, RxDC will be issued within 1.2  $\mu\text{s}$  of Overflow. If frame reception is terminated due to non-match of address, after RxRDY has gone HIGH, RxDC will be issued within 2.4  $\mu\text{s}$  of the receipt of the last address bit.
- Normal frame reception without Overflow. If frame reception is terminated due to Overflow, INT will be issued within 1.2  $\mu\text{s}$  of Overflow.
- For TxRET caused by Collision or 16 Collision condition. If transmission is terminated due to Underflow TxRET will be issued within 1.2  $\mu\text{s}$  of the Underflow.
- For INT caused by Collision or 16 Collision condition. If caused by Underflow, INT will be issued within 1.2  $\mu\text{s}$ . If caused by normal termination, INT will be issued within 100 ns of TxEN going LOW.
- Italics indicate input requirement, non-italics indicate output timing.


DATA INTERFACE TIMING

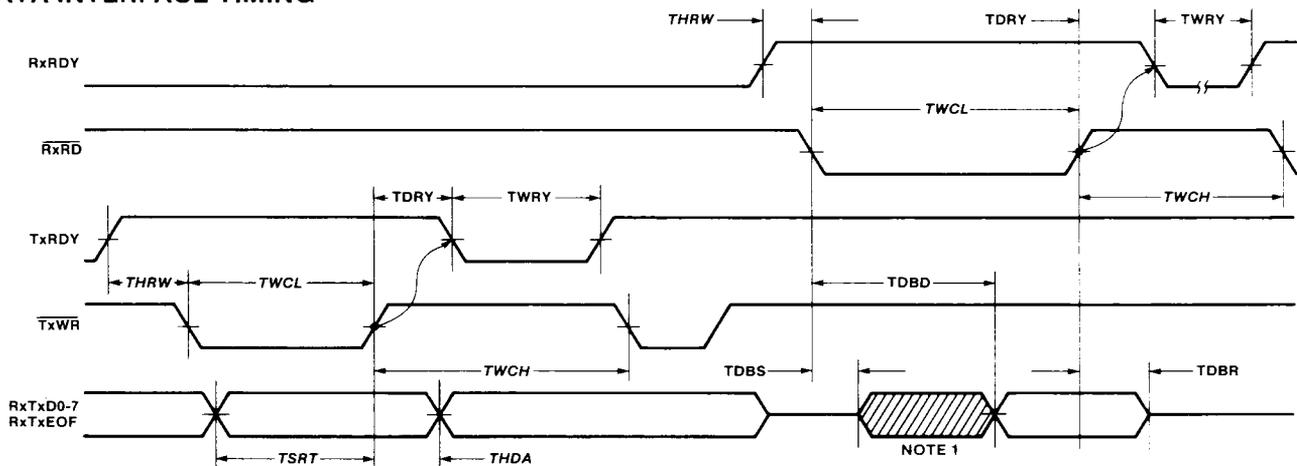


COMMAND/STATUS INTERFACE TIMING

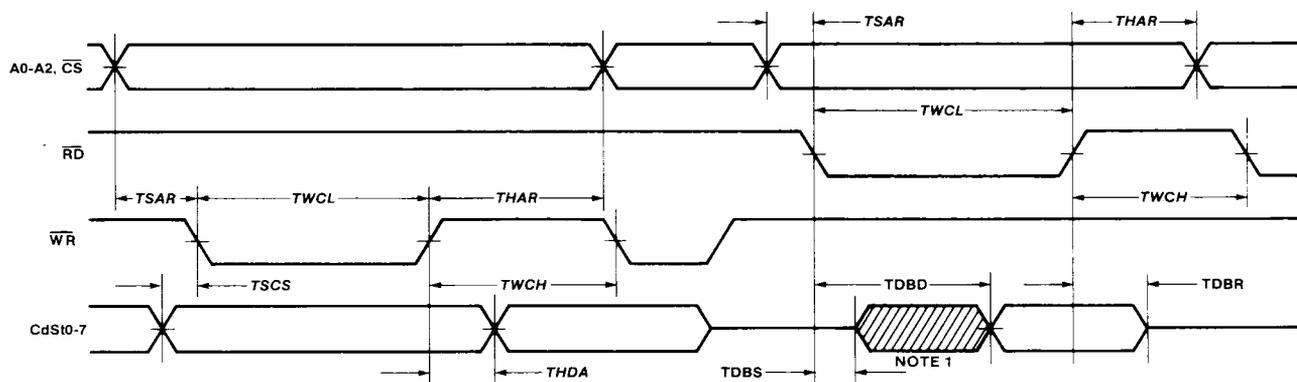

SERIAL TRANSMIT INTERFACE TIMING

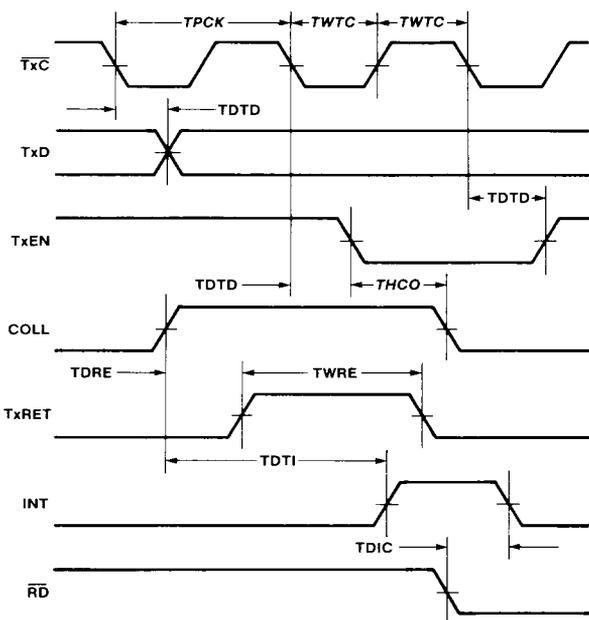

SERIAL RECEIVE INTERFACE TIMING

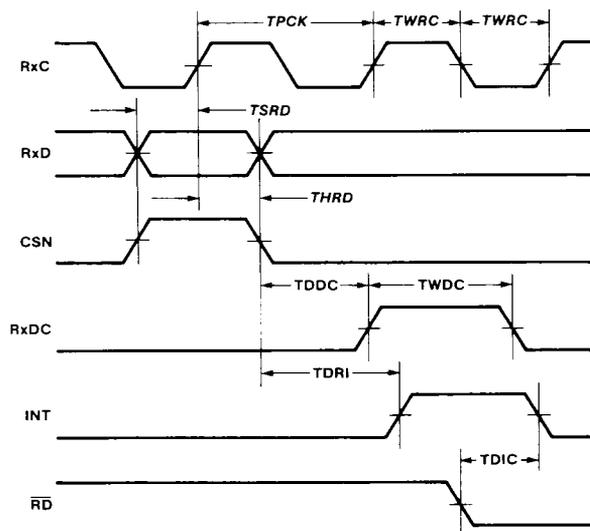


NOTE 1: BUS IS DRIVEN AT THIS TIME, HOWEVER, NO VALID INFORMATION PRESENT.

## Ordering and Package Information



**PART NUMBER**



**40-LEAD HERMETIC CERDIP  
PACKAGE TYPE D**

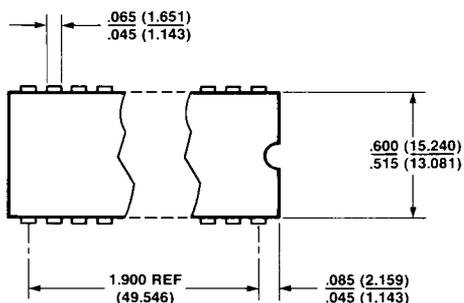

NOTES:  
1. FOR SOLDER DIPPED LEADS.  
THICKNESS WILL BE .020 MAX.

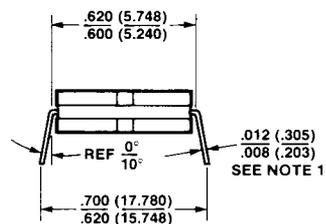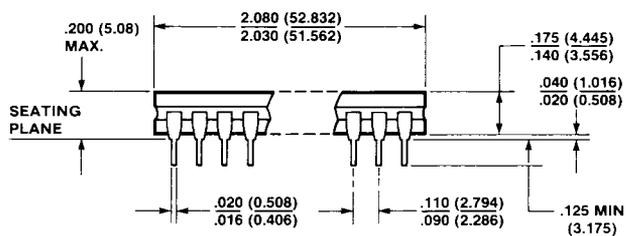

ALL DIMENSIONS IN INCHES AND (MILLIMETERS)

## U.S. SALES OFFICES

# 8001

**PRELIMINARY DATA SHEET**

**Corporate Sales and Marketing Headquarters**  
 SEEQ Technology, Inc.  
 1849 Fortune Drive  
 San Jose, California 95131  
 408 942-1990

**Western Area Sales Office**  
 SEEQ Technology, Inc.  
 17752 Skypark Circle,  
 Suite 200  
 Irvine, California 92714  
 714 545-4232

**Eastern Area Sales Office**  
 SEEQ Technology, Inc.  
 15 New England Executive Park  
 Burlington, Massachusetts 01803  
 617 229-6350

### Authorized Manufacturer's Representatives

#### Western Area

Tusar  
 6016 E. Larkspur  
 Scottsdale, AZ 85254  
 602 998-3688

Balzer/Wolf  
 P.O. Box 624  
 Canoga Park, CA 91305  
 213 888-7432

Balzer/Wolf  
 2991 Grace Lane  
 Costa Mesa, CA 92626  
 714 979-1775

Balzer/Wolf  
 8865 Balboa Avenue, Suite H  
 San Diego, CA 92123  
 714 922-9466

Taarcom, Inc.  
 542 Lakeside Drive,  
 Suite 9  
 Sunnyvale, CA 94086  
 408 730-9595

Waugaman Associates, Inc.  
 4800 Van Gordon  
 Wheatridge, CO 80033  
 303 423-1020

Northwest Marketing Associates  
 9999 S.W. Wilshire, Suite 124  
 Portland, OR 97225  
 503 297-2581

Waugaman Associates, Inc.  
 2520 S. State Street,  
 Suite 159  
 Salt Lake City, UT 84115  
 801 254-0570

Northwest Marketing Associates  
 12835 Bel-Red Road, #330N  
 Bellevue, WA 98005  
 206 455-5846

#### Mid-America Area

Arete Sales Inc.  
 8535 Flutter Road  
 Ft. Wayne, IN 46815  
 219 485-2375

Micro Sales, Inc.  
 54 West Seegers Road  
 Arlington Heights, IL 60005  
 312 956-1000

Cahill, Schmitz, and Cahill, Inc.  
 208 Collins Road NE, Suite K  
 Cedar Rapids, IA 52402  
 319 377-8219

Action Component Sales, Inc.  
 21333 Haggerty Road  
 Novi, MI 48050  
 313 349-3940

Cahill, Schmitz, and Cahill, Inc.  
 315 N. Pierce Street  
 St. Paul, MN 55104  
 612 646-7217

Micro Sales, Inc.  
 514 Earth City Plaza,  
 Suite 314  
 Earth City, MO 63045  
 314 739-7446

R.R. Burton & Associates  
 1012 A Main Street  
 P.O. Box 142  
 Grandview, MO 64030  
 816 763-5385

R.R. Burton & Associates  
 1187 Shulte Hill Road  
 P.O. Box 1593  
 Maryland Heights, MO 63043  
 314 434-1678

The Lyons Corporation  
 4812 Frederick Road, Suite 101  
 Dayton, OH 45414  
 513 278-0714

The Lyons Corporation  
 4615 West Streetsboro Road  
 Richfield, OH 44286  
 216 659-9224

Technology Sales, Inc.  
 4851 Keller Springs Road,  
 Suite 103  
 Dallas, TX 75248  
 214 380-0200

#### Eastern Area

Lawrence Associates, Inc.  
 2151 Northwest 2nd Avenue,  
 Suite 104  
 Boca Raton, FL 33431  
 305 368-7373

Lawrence Associates, Inc.  
 1605 South Missouri Avenue  
 Clearwater, FL 33156  
 813 584-8110

Lawrence Associates, Inc.  
 5435 Balsam Avenue  
 West Melbourne, FL 32901  
 813 724-8294

Mill-Bern Associates, Inc.  
 120 Cambridge Street,  
 Suite 8  
 Burlington, MA 01803  
 617 273-1313

Precision Sales  
 5 Arbutus Lane  
 MR 97  
 Binghamton, NY 13901  
 607 648-8833

ERA Inc.  
 354 Vets Memorial Highway  
 Commack, NY 11725  
 516 543-0510

J & B Sales, Inc.  
 P.O. Box 12505  
 Raleigh, NC 27605  
 919 772-3546

Precision Sales  
 1 Commerce Blvd.  
 Liverpool, NY 13088  
 315 451-3480

Precision Sales  
 3594 Monroe Avenue  
 Pittsford, NY 14534  
 315 381-2820

Precision Sales  
 Drake Road  
 Pleasant Valley, NY 12569  
 914 635-3233

L.D. Lowery  
 2801 West Chester Pike  
 Broomall, PA 19008  
 215 356-5300

### Authorized Nationwide Distributor

#### Schweber Electronics, Inc.

##### Alabama

2227 Drake Avenue S.W.,  
 Suite 14  
 Huntsville, AL 35805  
 205 882-2200

##### California

21139 Victory Blvd.  
 Canoga Park, CA 91303  
 213 999-4702

17811 Gillette Avenue  
 Irvine, CA 92714  
 714 556-3880

1771 Tribute Road,  
 Suite B  
 Sacramento, CA 95815  
 916 929-9732

3110 Patrick Henry Drive  
 Santa Clara, CA 95050  
 408 748-4700

##### Connecticut

Finance Drive  
 Commerce Industrial Park  
 Danbury, CT 06810  
 203 792-3500

##### Florida

181 Whooping Loop  
 Altamonte Springs, FL 32701  
 305 331-7555

2830 N. 28th Terrace  
 Hollywood, FL 33020  
 305 927-0511

##### Georgia

303 Research Drive  
 Suite 210  
 Norcross, GA 30092  
 404 449-9170

##### Illinois

904 Cambridge Drive  
 Elk Grove Village, IL 60007  
 312 364-3750

##### Iowa

5270 North Park Place, N.E.  
 Cedar Rapids, IA 52402  
 319 373-1417

##### Kansas

Wycliff Commercial Center  
 10300 West 103rd Street,  
 Suite 103, Building F  
 Overland Park, KS 66214  
 913 492-2921

##### Maryland

9218 Gaither Road  
 Gaithersburg, MD 20877  
 301 840-5900

##### Massachusetts

25 Wiggins Avenue  
 Bedford, MA 01730  
 617 275-5100

##### Michigan

12060 Hubbard Drive  
 Livonia, MI 48150  
 313 525-8100

##### Minnesota

7422 Washington Ave., South  
 Eden Prairie, MN 55344  
 612 941-5280

##### Missouri

502 Earth City Expressway,  
 Suite 203  
 Earth City, MO 63045  
 314 739-0526

##### New Hampshire

Farms Bldg #2 1st Floor,  
 Kilton & South River Road  
 Manchester, NH 03102  
 603 625-2250

##### New Jersey

18 Madison Road  
 Fairfield, NJ 07006  
 201 227-7880

##### New York

3 Town Line Circle  
 Rochester, NY 14623  
 716 424-2222

##### North Carolina

Jericho Turnpike  
 Westbury, NY 11590  
 516 334-7474  
 1 Commerce Center  
 5285 North Blvd.  
 Raleigh, NC  
 919 876-0000

##### Ohio

23880 Commerce Park Road  
 Beachwood, OH 44122  
 216 464-2970

##### Paragon Road

7865 Paragon Road,  
 Suite 210  
 Dayton, OH 45459  
 513 439-1800

##### Oklahoma

4815 South Sheridan  
 Fountain Plaza, Suite 109  
 Tulsa, OK 74145  
 918 622-8000

##### Pennsylvania

231-235 Gibraltar Road  
 Horsham, PA 19044  
 215 441-0600

1000 R.I.D.C. Plaza,  
 Suite 203  
 Pittsburgh, PA 15238  
 412 782-1600

##### Texas

111 W. Anderson Lane,  
 Suite 334  
 Austin, TX 78752  
 512 458-8253  
 4202 Beltway Drive  
 Dallas, TX 75234  
 214 661-5010

10625 Richmond Avenue,  
 Suite 100  
 Houston, TX 77042  
 713 784-3600

##### Wisconsin

150 Sunnyslope Road,  
 Suite 120  
 Brookfield, WI 53005  
 414 784-9020

The "Preliminary Data Sheet" designation on a SEEQ data sheet indicates that the product is not fully characterized. The specifications are subject to change, are based on design goals or preliminary part evaluation, and are not guaranteed. SEEQ Technology or an authorized sales representative should be consulted for current information before using this product. No responsibility is assumed by SEEQ for its use, nor for any infringements of patents and trademarks or other rights of third parties resulting from its use. SEEQ reserves the right to make changes in specifications at any time and without notice.

200060/30K/1182

**seeq** Technology, Incorporated

1849 Fortune Drive, San Jose, California 95131

12

015164 X X