


UNIDENTIFIED

V-606 SUPER I/O, W-606 SUPER I/O CARD

Chipset Winbond
Data Bus 16-bit ISA
Card Size Half height, half length
Hard Drives Supported Two IDE(AT) devices
Floppy Drives Supported Unidentified

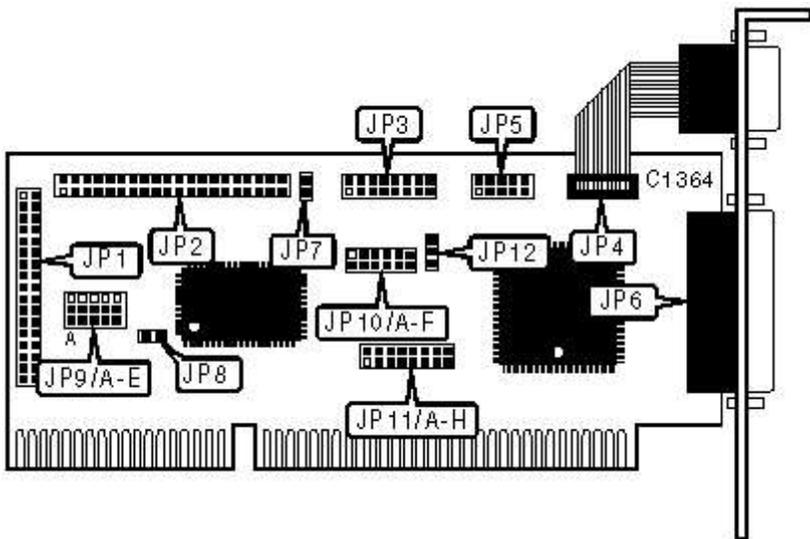

| CONNECTIONS | | | |
|---------------------------------------|-------|---------------------------------|-------|
| Function | Label | Function | Label |
| 34-pin cable connector - floppy drive | JP1 | 10-pin serial port 2 - internal | JP5 |
| 40-pin IDE(AT) connector | JP2 | 25-pin parallel port - external | JP6 |
| 16-pin game port | JP3 | 2-pin drive active LED | JP7 |
| 9-pin serial port 1 - external | JP4 | | |

| USER CONFIGURABLE SETTINGS | | |
|-----------------------------------|-------|----------|
| Setting | Label | Position |
| » Parallel port is unidirectional | JP8 | Closed |
| Parallel port is bidirectional | JP8 | Open |

| | | | |
|---|---|-------|-------------------|
| » | Floppy drive order is normal (A:, B:) | JP9/A | Pins 2 & 3 closed |
| | Floppy drive order is reversed (B:, A:) | JP9/A | Pins 1 & 2 closed |
| » | Floppy address is 3F0h | JP9/B | Pins 1 & 2 closed |
| | Floppy address is 370h | JP9/B | Pins 2 & 3 closed |
| » | IDE(AT) interface enabled | JP9/C | Pins 2 & 3 closed |
| | IDE(AT) interface disabled | JP9/C | Pins 1 & 2 closed |
| » | IDE(AT) address is 3F6h | JP9/D | Pins 1 & 2 closed |
| | IDE(AT) address is 376h | JP9/D | Pins 2 & 3 closed |
| » | Floppy interface enabled | JP9/E | Pins 2 & 3 closed |
| | Floppy interface disabled | JP9/E | Pins 1 & 2 closed |
| » | Game port enabled | JP12 | Pins 1 & 2 closed |
| | Game port disabled | JP12 | Pins 2 & 3 closed |

SERIAL PORT 1 ADDRESS SELECTION

| | Setting | JP10/A | JP10/B |
|---|--------------|-------------------|-------------------|
| » | 3F8h (COM1:) | Pins 2 & 3 closed | Pins 1 & 2 closed |
| | 3E8h (COM3:) | Pins 1 & 2 closed | Pins 2 & 3 closed |
| | 2E8h (COM4:) | Pins 2 & 3 closed | Pins 2 & 3 closed |
| | Disabled | Pins 1 & 2 closed | Pins 1 & 2 closed |

SERIAL PORT 2 ADDRESS SELECTION

| Setting | | JP10/C | JP10/D |
|---------|--------------|-------------------|-------------------|
| » | 2F8h (COM2:) | Pins 2 & 3 closed | Pins 1 & 2 closed |
| | 3E8h (COM3:) | Pins 2 & 3 closed | Pins 2 & 3 closed |
| | 2E8h (COM4:) | Pins 1 & 2 closed | Pins 2 & 3 closed |
| | Disabled | Pins 1 & 2 closed | Pins 1 & 2 closed |

PARALLEL PORT ADDRESS SELECTION

| Setting | | JP10/E | JP10/F |
|---------|----------|-------------------|-------------------|
| » | 378h | Pins 1 & 2 closed | Pins 2 & 3 closed |
| | 278h | Pins 2 & 3 closed | Pins 1 & 2 closed |
| | 3BCh | Pins 2 & 3 closed | Pins 2 & 3 closed |
| | Disabled | Pins 1 & 2 closed | Pins 1 & 2 closed |

SERIAL PORT 1 INTERRUPT SELECTION

| Setting | | JP11/A | JP11/B | JP11/C |
|---------|------|--------|--------|--------|
| | IRQ3 | Open | Closed | Open |
| » | IRQ4 | Closed | Open | Open |
| | IRQ5 | Open | Open | Closed |

SERIAL PORT 2 INTERRUPT SELECTION

| Setting | | JP11/D | JP11/E | JP11/F |
|---------|------|--------|--------|--------|
| » | IRQ3 | Closed | Open | Open |
| | IRQ4 | Open | Closed | Open |
| | IRQ5 | Open | Open | Closed |

PARALLEL PORT INTERRUPT SELECTION

| | Setting | JP11/G | JP11/H |
|---|----------------|---------------|---------------|
| | IRQ5 | Open | Closed |
| » | IRQ7 | Closed | Open |