


# SIIG, INC. CYBERPRO QUAD I/O

**Card Type** Serial  
**Chip Set** SIIG  
**I/O Options** Serial ports (4)  
**Data Bus** 16-bit ISA

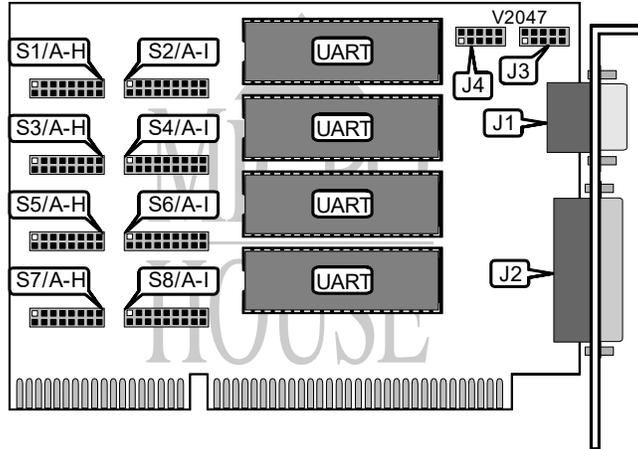

CONNECTIONS			
Function	Label	Function	Label
Serial port 1	J1	Serial port 3	J3
Serial port 2	J2	Serial port 4	J4

SERIAL PORT 1 ADDRESS								
Setting	S1/A	S1/B	S1/C	S1/D	S1/E	S1/F	S1/G	S1/H
COM1: (3F8h)	Closed	Open						
COM2: (2F8h)	Open	Closed	Open	Open	Open	Open	Open	Open
COM3: (3E8h)	Open	Open	Closed	Open	Open	Open	Open	Open
COM4: (2E8h)	Open	Open	Open	Closed	Open	Open	Open	Open
COM5: (3F0h)	Open	Open	Open	Open	Closed	Open	Open	Open
COM6: (3E0h)	Open	Open	Open	Open	Open	Closed	Open	Open
COM7: (2E0h)	Open	Open	Open	Open	Open	Open	Closed	Open
COM8: (260h)	Open	Closed						
Disabled	Open							

SERIAL PORT 2 ADDRESS								
Setting	S3/A	S3/B	S3/C	S3/D	S3/E	S3/F	S3/G	S3/H
COM1: (3F8h)	Closed	Open						
COM2: (2F8h)	Open	Closed	Open	Open	Open	Open	Open	Open
COM3: (3E8h)	Open	Open	Closed	Open	Open	Open	Open	Open
COM4: (2E8h)	Open	Open	Open	Closed	Open	Open	Open	Open
COM5: (3F0h)	Open	Open	Open	Open	Closed	Open	Open	Open
COM6: (3E0h)	Open	Open	Open	Open	Open	Closed	Open	Open
COM7: (2E0h)	Open	Open	Open	Open	Open	Open	Closed	Open
COM8: (260h)	Open	Closed						
Disabled	Open							

Continued on next page . . .

SIIG, INC.  
CYBERPRO QUAD I/O

. . . continued from previous page

SERIAL PORT 3 ADDRESS								
Setting	S5/A	S5/B	S5/C	S5/D	S5/E	S5/F	S5/G	S5/H
COM1: (3F8h)	Closed	Open						
COM2: (2F8h)	Open	Closed	Open	Open	Open	Open	Open	Open
COM3: (3E8h)	Open	Open	Closed	Open	Open	Open	Open	Open
COM4: (2E8h)	Open	Open	Open	Closed	Open	Open	Open	Open
COM5: (3F0h)	Open	Open	Open	Open	Closed	Open	Open	Open
COM6: (3E0h)	Open	Open	Open	Open	Open	Closed	Open	Open
COM7: (2E0h)	Open	Open	Open	Open	Open	Open	Closed	Open
COM8: (260h)	Open	Closed						
Disabled	Open							

SERIAL PORT 4 ADDRESS								
Setting	S7/A	S7/B	S7/C	S7/D	S7/E	S7/F	S7/G	S7/H
COM1: (3F8h)	Closed	Open						
COM2: (2F8h)	Open	Closed	Open	Open	Open	Open	Open	Open
COM3: (3E8h)	Open	Open	Closed	Open	Open	Open	Open	Open
COM4: (2E8h)	Open	Open	Open	Closed	Open	Open	Open	Open
COM5: (3F0h)	Open	Open	Open	Open	Closed	Open	Open	Open
COM6: (3E0h)	Open	Open	Open	Open	Open	Closed	Open	Open
COM7: (2E0h)	Open	Open	Open	Open	Open	Open	Closed	Open
COM8: (260h)	Open	Closed						
Disabled	Open							

SERIAL PORT 1 INTERRUPT									
Setting	S2/A	S2/B	S2/C	S2/D	S2/E	S2/F	S2/G	S2/H	S2/I
IRQ2/9	Open	Open	Open	Open	Closed	Open	Open	Open	Open
IRQ3	Closed	Open							
IRQ4	Open	Closed	Open						
IRQ5	Open	Open	Closed	Open	Open	Open	Open	Open	Open
IRQ7	Open	Open	Open	Closed	Open	Open	Open	Open	Open
IRQ10	Open	Open	Open	Open	Open	Closed	Open	Open	Open
IRQ11	Open	Open	Open	Open	Open	Open	Closed	Open	Open
IRQ12	Open	Closed	Open						
IRQ15	Open	Closed							
Disabled	Open								

Continued on next page . . .

