


DIALOGIC CORPORATION

D/120, D/121, D/121A, D/121B

Card Type	Telephony
Processor	80286
Processor Speed	Unidentified
Chip Set	Unidentified
I/O Options	PCM bus
Maximum Onboard Memory	Unidentified
Data Bus	16-bit ISA

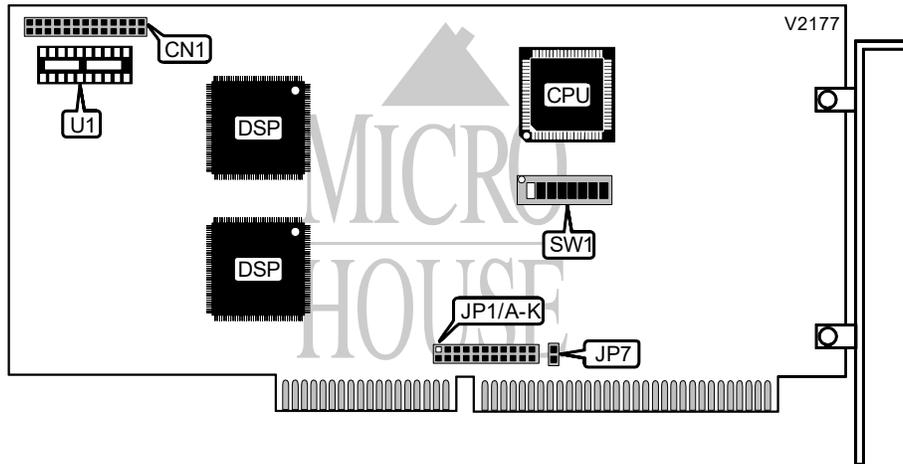

CONNECTIONS	
Function	Label
PCM bus	CN1

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
Interrupt driver enabled	JP7	Closed
Interrupt driver disabled	JP7	Open

Note: JP7 should only be closed on one D/12x or D/4x board in the system.

PCM BUS TERMINATION	
Setting	U1
Terminated	Installed
Not terminated	Not installed

Continued on next page. . .

DIALOGIC CORPORATION
D/120, D/121, D/121A, D/121B

... continued from previous page

BASE I/O ADDRESS								
Setting	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7	SW1/8
000h	On							
004h	On	Off						
008h	On	On	On	On	On	On	Off	On
00Ch	On	On	On	On	On	On	Off	Off
010h	On	On	On	On	On	Off	On	On
í 340h	Off	Off	On	Off	On	On	On	On
3ECh	Off	Off	Off	Off	Off	On	Off	Off
3F0h	Off	Off	Off	Off	Off	Off	On	On
3F4h	Off	Off	Off	Off	Off	Off	On	Off
3F8h	Off	On						
3FCh	Off							

Note: A total of 255 base address settings are available. The switches are a binary representation of the decimal memory addresses. SW1/1 is the Most Significant Bit and switch SW1/8 is the Least Significant Bit. The switches have the following decimal values: SW1/1=512, SW1/2=256, SW1/3=128, SW1/4=64, SW1/5=32, SW1/6=16, SW1/7=8, SW1/8=4. Turn off the switches and add the values of the switches that are off to obtain the correct memory address. (Off=1, On=0)

INTERRUPT						
Setting	JP1/A	JP1/B	JP1/C	JP1/D	JP1/E	JP1/F
IRQ2/9	Closed	Open	Open	Open	Open	Open
í IRQ3	Open	Closed	Open	Open	Open	Open
IRQ4	Open	Open	Closed	Open	Open	Open
IRQ5	Open	Open	Open	Closed	Open	Open
IRQ6	Open	Open	Open	Open	Closed	Open
IRQ7	Open	Open	Open	Open	Open	Closed
IRQ10	Open	Open	Open	Open	Open	Open
IRQ11	Open	Open	Open	Open	Open	Open
IRQ12	Open	Open	Open	Open	Open	Open
IRQ14	Open	Open	Open	Open	Open	Open
IRQ15	Open	Open	Open	Open	Open	Open

INTERRUPT (CON'T)					
Setting	JP1/G	JP1/H	JP1/I	JP1/J	JP1/K
IRQ2/9	Open	Open	Open	Open	Open
í IRQ3	Open	Open	Open	Open	Open
IRQ4	Open	Open	Open	Open	Open
IRQ5	Open	Open	Open	Open	Open
IRQ6	Open	Open	Open	Open	Open
IRQ7	Open	Open	Open	Open	Open
IRQ10	Closed	Open	Open	Open	Open
IRQ11	Open	Closed	Open	Open	Open
IRQ12	Open	Open	Closed	Open	Open
IRQ14	Open	Open	Open	Closed	Open
IRQ15	Open	Open	Open	Open	Closed