


DIALOGIC CORPORATION PROLINE/2V

Card Type Telephony (voice)
Chipset Unidentified
I/O Options Audio line in, audio line out
Line Type PBX
Data Bus 16-bit ISA
Card Size Full height, three-quarters length

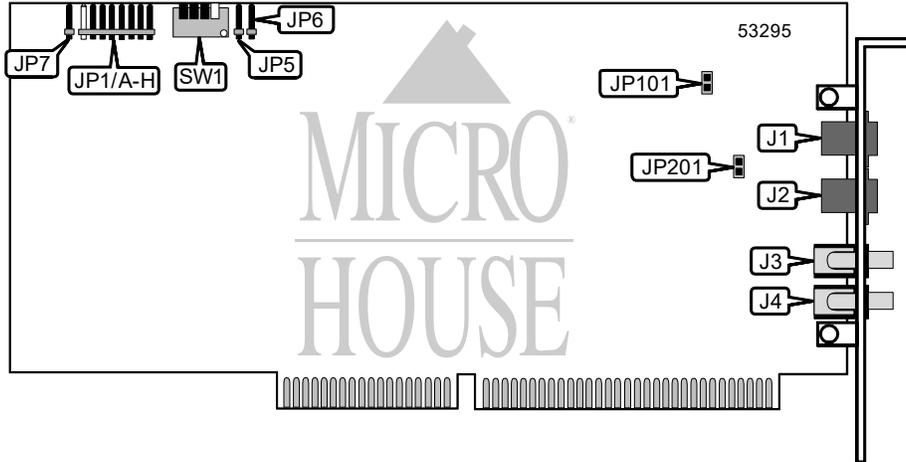

CONNECTIONS			
Function	Label	Function	Label
Telephone line 1 out	J1	Audio line in	J3
Telephone line 2 out	J2	Audio line out	J4

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
Board is interrupt master	JP7	Closed
Board is interrupt slave	JP7	Open
Line 1 set to normal ring sensitivity	JP101	Open
Line 1 set to high ring sensitivity	JP101	Closed
Line 2 set to normal ring sensitivity	JP201	Open
Line 2 set to high ring sensitivity	JP201	Closed

Note: When multiple Proline cards are installed in a system, the card that is electrically furthest from the CPU should be the one that is set to interrupt master.

INTERRUPT SELECTION								
Setting	JP1/A	JP1/B	JP1/C	JP1/D	JP1/E	JP1/F	JP1/G	JP1/H
2/9	Open	Closed						
3	Open	Open	Open	Open	Open	Open	Closed	Open
4	Open	Open	Open	Open	Open	Closed	Open	Open
5	Open	Open	Open	Open	Closed	Open	Open	Open
7	Open	Open	Open	Closed	Open	Open	Open	Open
10	Open	Open	Closed	Open	Open	Open	Open	Open
11	Open	Closed	Open	Open	Open	Open	Open	Open
12	Closed	Open						

Note: All Proline boards installed in the system should be set to the same interrupt.

Continued on next page . . .

DIALOGIC CORPORATION
 PROLINE/2V

. . . continued from previous page

SHARED RAM ADDRESS SELECTION					
Setting	JP5	JP6	SW1/1	SW1/2	SW1/3
A000h	Closed	Open	Off	Off	Off
A200h	Closed	Open	Off	Off	On
A400h	Closed	Open	Off	On	Off
A600h	Closed	Open	Off	On	On
A800h	Closed	Open	On	Off	Off
AA00h	Closed	Open	On	Off	On
AC00h	Closed	Open	On	On	Off
AE00h	Closed	Open	On	On	On
B800h	Closed	Closed	On	Off	Off
BA00h	Closed	Closed	On	Off	On
BC00h	Closed	Closed	On	On	Off
BE00h	Closed	Closed	On	On	On
C000h	Open	Closed	Off	Off	Off
C200h	Open	Closed	Off	Off	On
C400h	Open	Closed	Off	On	Off
C600h	Open	Closed	Off	On	On
C800h	Open	Closed	On	Off	Off
CA00h	Open	Closed	On	Off	On
CC00h	Open	Closed	On	On	Off
CE00h	Open	Closed	On	On	On
D000h	Open	Open	Off	Off	Off
D200h	Open	Open	Off	Off	On
D400h	Open	Open	Off	On	Off
D600h	Open	Open	Off	On	On
D800h	Open	Open	On	Off	Off
DA00h	Open	Open	On	Off	On
DC00h	Open	Open	On	On	Off
DE00h	Open	Open	On	On	On