


SEALEVEL SYSTEMS, INC.

COMM + 232 / EX

Card Type	Serial card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	Serial ports (2 RS-422)
Hard Drives supported	None
Floppy drives supported	None
Data Bus	8-bit ISA
Card Size	Half-length, full-height

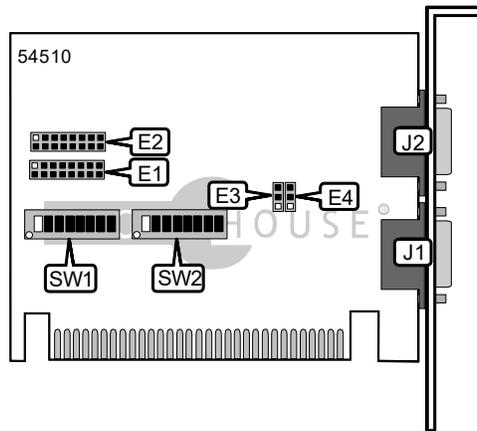

CONNECTIONS				
Function	Label	Function	Label	
Serial Port 1	J1	Serial Port 2	J2	

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Factory configured - do not alter	SW1/8	On	
í Factory configured - do not alter	SW2/8	On	

BASE I/O ADDRESS SELECTION PORT 1							
Setting	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7
280h	Off	On	Off	On	On	On	On
2A0h	Off	On	Off	On	Off	On	On
2E8h	Off	On	Off	Off	Off	On	Off
2F8h	Off	On	Off	Off	Off	Off	Off
3E8h	Off	Off	Off	Off	Off	On	Off
300h	Off	Off	On	On	On	On	On
328h	Off	Off	On	On	Off	On	Off
í 3F8h	Off						

Continued on next page . . .

BASE I/O ADDRESS SELECTION PORT 2							
Setting	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6	SW2/7
280h	Off	On	Off	On	On	On	On
2A0h	Off	On	Off	On	Off	On	On
2E8h	Off	On	Off	Off	Off	On	Off
í 2F8h	Off	On	Off	Off	Off	Off	Off
3E8h	Off	Off	Off	Off	Off	On	Off
300h	Off	Off	On	On	On	On	On
328h	Off	Off	On	On	Off	On	Off
3F8h	Off						

SERIAL PORT 1 INTERRUPT SELECTION								
IRQ	E1/A	E1/B	E1/C	E1/D	E1/E	E1/F	E1/G	E1/H
IRQ2/9	Closed	Open						
IRQ3	Open	Closed	Open	Open	Open	Open	Open	Open
í IRQ4	Open	Open	Closed	Open	Open	Open	Open	Open
IRQ5	Open	Open	Open	Closed	Open	Open	Open	Open
IRQ10	Open	Open	Open	Open	Closed	Open	Open	Open
IRQ11	Open	Open	Open	Open	Open	Closed	Open	Open
IRQ12	Open	Open	Open	Open	Open	Open	Closed	Open
IRQ15	Open	Closed						

SERIAL PORT 2 INTERRUPT SELECTION								
IRQ	E2/A	E2/B	E2/C	E2/D	E2/E	E2/F	E2/G	E2/H
IRQ2/9	Closed	Open						
í IRQ3	Open	Closed	Open	Open	Open	Open	Open	Open
IRQ4	Open	Open	Closed	Open	Open	Open	Open	Open
IRQ5	Open	Open	Open	Closed	Open	Open	Open	Open
IRQ10	Open	Open	Open	Open	Closed	Open	Open	Open
IRQ11	Open	Open	Open	Open	Open	Closed	Open	Open
IRQ12	Open	Open	Open	Open	Open	Open	Closed	Open
IRQ15	Open	Closed						

SERIAL INTERRUPT MODE SELECTION PORT 1	
IRQ	E3
í Normal	Pins 2 & 3 closed
Shared Interrupt mode	Pin 1 & 2 closed
None	Open

SERIAL INTERRUPT MODE SELECTION PORT 2	
IRQ	E4
í Normal	Pins 2 & 3 closed
Shared Interrupt mode	Pin 1 & 2 closed
None	Open

MISCELLANEOUS TECHNICAL NOTES
 As an option, J1 can be replaced with a DB-25 connector.