


ZOLTRIX, INC. FM-288SI

Card Type	Modem, Fax
Chip Set	Rockwell
I/O Options	Line in (RJ-11), line out (RJ-11)
Maximum Modem Rate	28.8Kbps
Maximum Fax Rate	14.4Kbps
Data Modulation Protocol	Bell 103A/212A ITU-T V.21, V.22, V.22bis, V.32, V.32bis, V.34 Rockwell V.FC
Fax Modulation Protocol	ITU-T V.17, V.21 CH.2, V.27ter, V.29
Error Correction/Compression	MNP5, V.42, V.42bis
Fax Class	Class I & II
Data Bus	8-bit ISA
Card Size	Half-length, full-height card

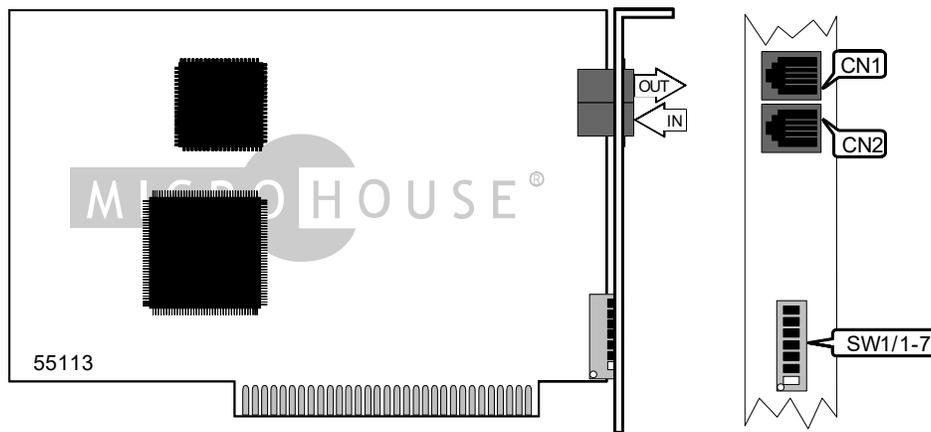

CONNECTIONS			
Function	Label	Function	Label
Line out	CN1	Line in	CN2

SERIAL PORT ADDRESS		
Setting	SW1/5	SW1/6
COM1 (3F8h)	On	On
COM2 (2F8h)	Off	On
COM3 (3E8h)	On	Off
COM4 (2E8h)	Off	Off

INTERRUPT SETTINGS					
IRQ	SW1/1	SW1/2	SW1/3	SW1/4	SW1/7
IRQ2	Off	Off	Off	Off	On
IRQ3	Off	Off	Off	On	Off
IRQ4	Off	Off	On	Off	Off
IRQ5	Off	On	Off	Off	Off
IRQ7	On	Off	Off	Off	Off

Continued on next page...

SUPPORTED COMMAND SET	
Basic AT Commands	
AT, '+++', A/	
A, B, C, D, E, F, H, I, L, M, N, O, P, Q, T, V, W, X, Y, Z	
&C, &D, &F, &G, &J, &K, &L, &M, &P, &Q, &R, &S, &T, &V, &W, &X, &Y, &Z	
Extended AT Commands	
\A, \B, \G, \K, \L, \N	
%C, %E, %L, %Q	
S Registers	
S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S14, S16, S18, S21, S22, S23, S25, S26, S27, S29, S30, S32, S33, S36, S37, S38, S40, S41, S46, S48, S82, S86, S95	
Special Commands	
+MS	
Note: See MHI Help File for full command documentation.	