


ACCULOGIC, INC.
SIDE-1

Q4/92

Data bus:	8-bit, ISA
Size:	Half-length, full-height card
Hard drives supported:	One IDE(XT) drive
Floppy drives supported:	None

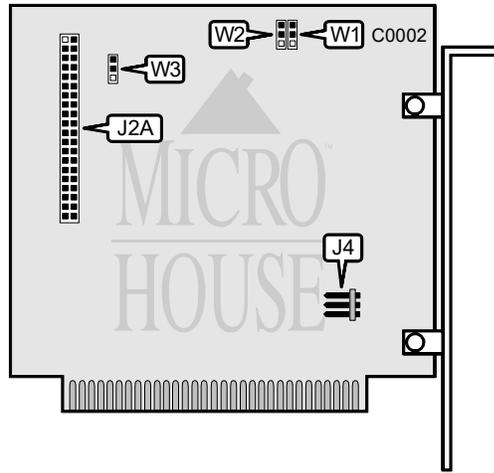

CONNECTIONS	
Function	Location
40-pin XT Interface (IDE) connector	J2A
5-pin connector-DC power	J4

Continued on next page . . .

ACCULOGIC, INC.
SIDE-1

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í BIOS address is C800h	W1	pins 2 & 3 closed
BIOS address is CA00h	W1	pins 1 & 2 closed
í I/O port address is 320h	W2	pins 1 & 2 closed
I/O port address is 324h	W2	pins 2 & 3 closed
í Interrupt Request is IRQ5	W3	pins 1 & 2 closed
Interrupt Request is IRQ2*	W3	pins 2 & 3 closed

BIOS SUPPORTED CONFIGURATIONS		
Formatted Capacity	Maximum Heads	Cylinders
20 MB	2	782
30 MB	3	782
40 MB	4	782

MISCELLANEOUS TECHNICAL NOTES
This controller has an on-board low-level format program. To enter the program, run DEBUG utility supplied with DOS and enter G=C800:5 at the prompt. This controller supports 17 SPT translation. *If IRQ2 is selected the drive must also be set to IRQ2 (See Volume 2: Drive Settings)