


ACCULOGIC, INC. SIDE-2

Q4/92

Data bus: 16-bit, ISA
 Size: Half-length, half-height card
 Hard drives supported: Two IDE(AT) drives
 Floppy drives supported: None

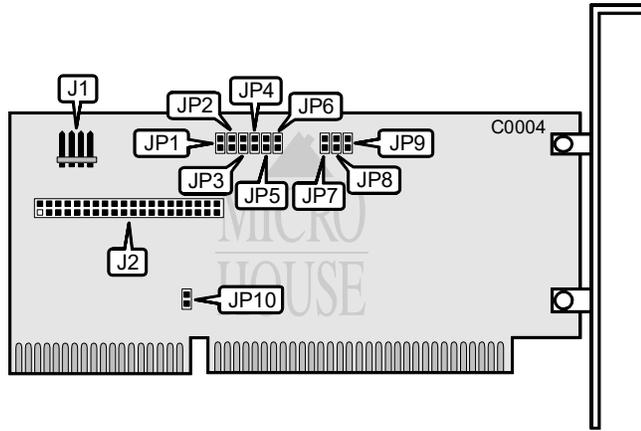

CONNECTIONS	
Function	Location
4-pin connector-Drive Active LED	J1
40-pin XT Interface (IDE) connector	J2

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Hard drive port address is 1F0-1F7h	JP7	open
Hard drive port address is 170-177h	JP7	closed
í I/O Channel Ready signal disabled	JP10	open
I/O Channel Ready signal enabled	JP10	closed

IRQ14 STATUS		
Function	Jumper JP1	Jumper JP2
í IRQ14 normal	closed	open
IRQ14 delayed until ACTIVE- signal is removed	open	closed

MISCELLANEOUS TECHNICAL NOTES
JP3 through JP6, and JP8 & JP9 are Not used.