


ACCULOGIC, INC. SIDE-3/PLUS

Q4/92

Data bus: 16-bit, ISA
 Size: Half-length, half-height card
 Hard drives supported: Two IDE(AT) drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB

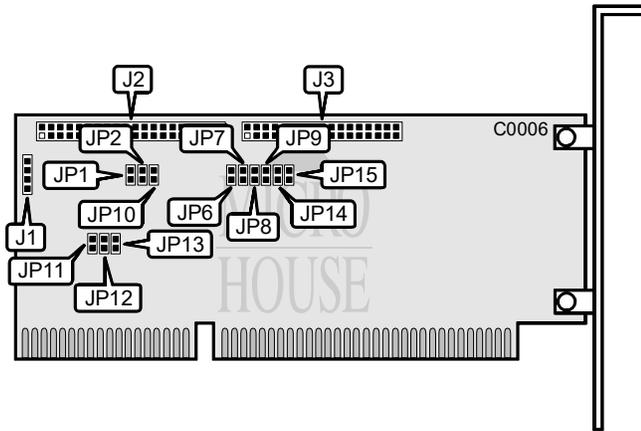

CONNECTIONS	
Function	Location
4-pin connector-Drive Active LED	J1
40-pin AT Interface (IDE) connector	J2
34-pin control cable connector-floppy drive	J3

BIOS ADDRESS		
Address	Jumper JP12	Jumper JP13
0800h	open	open
CC00h	open	closed
D800h	closed	open
DC00h	closed	closed

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive port address is 3F0-3F7h	JP6	open
Floppy drive port address is 370-377h	JP6	closed
í Hard drive port address is 1F0-1F7h	JP7	open
Hard drive port address is 170-177h	JP7	closed
í Single speed floppy drives supported	JP8	open
Dual speed floppy drives supported	JP8	closed
í Floppy drive precompensation is 125ns	JP9	open
Floppy drive precompensation is 187ns	JP9	closed
í I/O Channel Ready signal disabled	JP10	open
I/O Channel Ready signal enabled	JP10	closed
í BIOS enabled	JP11	open
BIOS disabled	JP11	closed
í 2.88MB drives not supported on A:	JP14	open
2.88MB drives supported on A:	JP14	closed
í 2.88MB drives not supported on B:	JP15	open
2.88MB drives supported on B:	JP15	closed

IRQ14 STATUS		
Function	Jumper JP1	Jumper JP2
í IRQ14 normal	closed	open
IRQ14 delayed until ACTIVE- signal is removed	open	closed

MISCELLANEOUS TECHNICAL NOTES
This Controller has no on-board software.