


**ADAPTEC, INC.**  
**ACB-2370C, ACB-2372C**

Q2/92

Data bus: 16-bit, ISA  
 Size: Full-length, full-height card  
 Hard drives supported: Two RLL ST506 drives  
 Floppy drives supported: ACB-2370C: None  
 ACB-2372C: Two 360KB, 720KB, 1.2MB, or 1.44MB

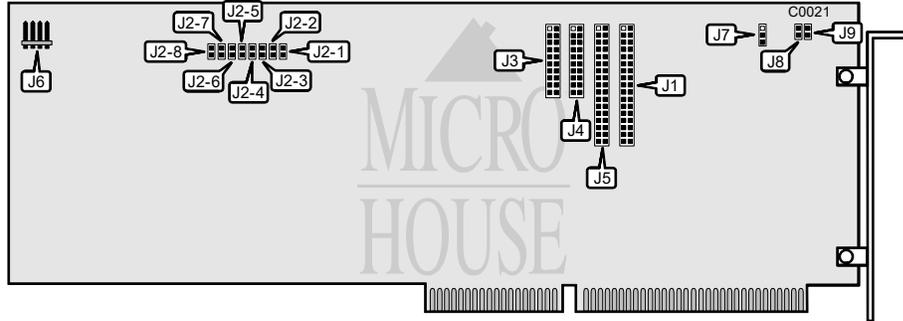

CONNECTIONS	
Function	Location
34-pin data cable connector-floppy drive	J1
20-pin data cable connector-drive 1	J3
20-pin data cable connector-drive 0	J4
34-pin control cable connector-hard drive	J5
3-pin connector-drive active LED	J6

*Continued on next page . . .*

ADAPTEC, INC.  
ACB-2370C, ACB-2372C

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Hard drive port address 1F0-1F7h	J2-1	open
Hard drive port address 170-177h	J2-1	closed
í Not used	J2-2	open
í Zero wait state disabled	J2-3	closed
Zero wait state enabled	J2-3	open
í 16µsec step rate and recalibrate to 0	J2-4	open
35µsec step rate and recalibrate to 0 minus 1	J2-4	closed
í Read ahead cache enabled	J2-5	open
Read ahead cache disabled	J2-5	closed
í Not used	J2-6	open
í Not used	J2-7	open
í BIOS address C800h	J7	pins 1 & 2 closed
BIOS address CC00h	J7	pins 2 & 3 closed
BIOS disabled	J7	open
í Floppy drive port address 3F0-3F7h	J8	open
Floppy drive port address 370-377h	J8	closed
í Floppy drive enabled	J9	open
Floppy drive disabled	J9	closed