


# ALWAYS TECHNOLOGY CORPORATION IN-2000

Q3/92

Data bus: 16-bit, ISA  
 Size: Half-length, full-height card  
 Hard drives supported: Up to seven SCSI devices  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB

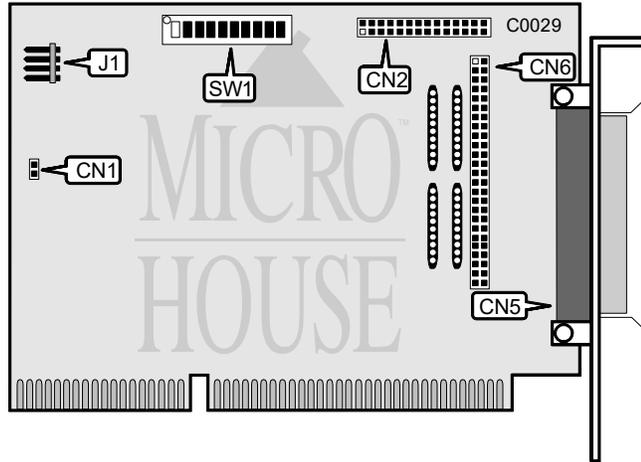

CONNECTIONS		
Function	Location	
2-pin connector-drive active LED	CN1	
34-pin data cable connector-floppy drive	CN2	
25-pin SCSI connector-external	CN5	
50-pin SCSI connector-internal	CN6	
4-pin power connector-controller power	J1	

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
f Asynchronous operation enabled	SW1/switch 8	off
Synchronous operation enabled	SW1/switch 8	on
f Floppy drive enabled	SW1/switch 9	on
Floppy drive disabled	SW1/switch 9	off
f Not used	SW1/switch 10	off

Continued on next page . . .

**ALWAYS TECHNOLOGY CORPORATION  
IN-2000**

. . . continued from previous page

BIOS ADDRESS		
Address	SW1/switch 1	SW1/switch 2
í C800-CBFFh	off	off
D800-DBFFh	on	off
D000-D3FFh	off	on
Disabled	on	on

I/O PORT ADDRESS		
Address	SW1/switch 3	SW1/switch 4
í 220-22Fh	off	off
200-20Fh	on	off
110-11Fh	off	on
100-10Fh	on	on

INTERRUPT REQUEST			
IRQ	SW1/switch 5	SW1/switch 6	SW1/switch 7
í 15	off	off	off
14	off	on	off
11	off	off	on
10	off	on	on
Disabled	on	off	off