


NCL AMERICA
NCL 5525-50, NCL 5526-50

Data bus: 16-bit, ISA
 Size: Half-length, full-height card
 Hard drives supported: Two ST506/412 MFM drives
 Floppy drives supported: NCL 5525-50: Two 360KB, 720KB, 1.2MB, or 1.44MB
 NCL 5526-50: None
 Maximum heads/cyl.: 16 heads and 2048 cylinders

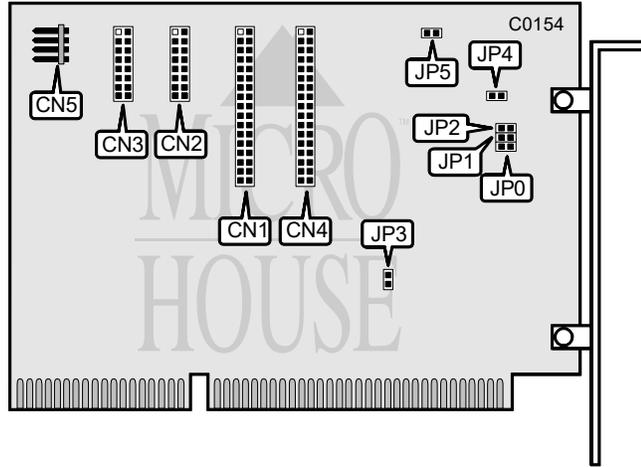

CONNECTIONS	
34-pin control cable connector-hard drive	CN1
20-pin data cable connector-drive 0	CN2
20-pin data cable connector-drive 1	CN3
34-pin data cable connector-floppy drive (NCL 5355 only)	CN4
4-pin connector-drive active LED	CN5

Continued on next page . . .

NCL AMERICA
 NCL 5525-50, NCL 5526-50

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Hard drive port address is 1F0-1F7h	JP0	open
Hard drive port address is 170-177h	JP0	closed
í Factory configured - do not alter	JP1	open
í LED always lit once unit is selected	JP2	open
LED is lit only during access	JP2	closed
í Factory configured - do not alter	JP3	open
í Floppy drive port address is 3F0-3F7h	JP4	closed
Floppy drive port address is 370-377h	JP4	open
í Factory configured - do not alter	JP5	open