



Socket FM1 Design Specification

Publication #	47610	Revision:	3.00
Issue Date:	August 2011		

© 2011 Advanced Micro Devices, Inc. All rights reserved.

The contents of this document are provided in connection with Advanced Micro Devices, Inc. (“AMD”) products. AMD makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. The information contained herein may be of a preliminary or advance nature and is subject to change without notice. No license, whether express, implied, arising by estoppel, or otherwise, to any intellectual property rights are granted by this publication. Except as set forth in AMD’s Standard Terms and Conditions of Sale, AMD assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.

AMD’s products are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or in any other application in which the failure of AMD’s product could create a situation where personal injury, death, or severe property or environmental damage may occur. AMD reserves the right to discontinue or make changes to its products at any time without notice.

Trademarks

AMD, and the AMD Arrow logo, and combinations thereof are trademarks of Advanced Micro Devices, Inc.

Other product names used in this publication are for identification purposes only and may be trademarks of their respective companies.

Specification Agreement

This Specification Agreement (this "Agreement") is a legal agreement between Advanced Micro Devices, Inc., Sunnyvale CA ("AMD") and "You" as the recipient of the attached AMD Specification (the "Specification"). If you are accessing the Specification as part of your performance of work for another party, you acknowledge that you have authority to bind such party to the terms and conditions of this Agreement. If you accessed the Specification by any means or otherwise use or provide feedback (defined below) on the specification, You agree to the terms and conditions set forth in this Agreement. If You do not agree to the terms and conditions set forth in this Agreement, You are not licensed to use the Specification; do not use, access or provide Feedback about the Specification.

In consideration of Your use or access of the Specification (in whole or in part), the receipt and sufficiency of which are acknowledged, You agree as follows:

1. You may review the Specification only (a) as a reference to assist You in planning and designing Your product, service or technology ("Produce") to interface with an AMD product in compliance with the requirements as set forth in the Specification and (b) to provide Feedback about the information disclosed in the Specification to AMD.
2. Except as expressly set forth in Paragraph 1., all rights in and to the Specification are retained by AMD. This Agreement does not give You any rights under any AMD patents, copyrights, trademarks or other intellectual property rights. You may not (i) duplicate any part of the Specification; (ii) remove this Agreement or any notices from the Specification, or (iii) give any part of the Specification, or assign or otherwise provide Your rights under this Agreement, to anyone else.
3. The Specification may contain preliminary information, errors, or inaccuracies, or may not include certain necessary information. Additionally, AMD reserves the right to discontinue or make changes to the Specification and its products at any time without notice. The Specification is provided entirely "AS IS." AMD MAKES NO WARRANTY OF ANY KIND AND DISCLAIMS ALL EXPRESS, IMPLIED AND STATUTORY WARRANTIES, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NONINFRINGEMENT, TITLE OR THOSE WARRANTIES ARISING AS A COURSE OF DEALING OR CUSTOM OF TRADE. AMD SHALL NOT BE LIABLE FOR DIRECT, INDIRECT, CONSEQUENTIAL, SPECIAL, INCIDENTAL, PUNITIVE OR EXEMPLARY DAMAGES OF ANY KIND (INCLUDING LOSS OF BUSINESS, LOSS OF INFORMATION OR DATA, LOST PROFITS, LOSS OF CAPITAL, LOSS OF GOODWILL) REGARDLESS OF THE FORM OF ACTION WHETHER IN CONTRACT, TORT (INCLUDING NEGLIGENCE) AND STRICT PRODUCT LIABILITY OR OTHERWISE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.
4. Furthermore, AMD's products are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or in any other application in which the failure of AMD's product could create a situation where personal injury, death, or severe property or environmental damage may occur.
5. You have no obligation to give AMD any suggestions, comments or feedback ("Feedback") relating to the Specification. However, any Feedback You voluntarily provide may be used by AMD without restriction, fee or obligation of confidentiality. Accordingly, if You do give AMD Feedback on any version of the Specification, You agree AMD may freely use, reproduce, license, distribute, and otherwise commercialize Your Feedback in any product, as well as has the right to sublicense third parties to do the same. Further, You will not give AMD any Feedback that You may have reason to

believe is (i) subject to any patent, copyright or other intellectual property claim or right of any third party; or (ii) subject to license terms which seek to require any product or intellectual property incorporating or derived from Feedback or any Product or other AMD intellectual property to be licensed to or otherwise provided to any third party.

6. You shall adhere to all applicable U.S. European, and other export laws, including, but not limited to the U.S. Export Administration Regulations (“EAR”), (15 C.F.R. Sections 730 through 774), and E.U. Council Regulation (EC) No 1334/2000 of 22 June 2000. Further, pursuant to Section 740.6 of the EAR, You hereby certifies that, except pursuant to a license granted by the United States Department of Commerce Bureau of Industry and Security or as otherwise permitted pursuant to a License Exception under the U.S. Export Administration Regulations (“EAR”), You will not (1) export, re-export or release to a national of a country in Groups D:1, E:1 or E:2 any restricted technology, software, or source code You receive hereunder, or (2) export to Country security controls as identified on the Commerce Control List (currently found in Supplement 1 to Part 774 of EAR). For the most current Country Group listings, or for additional information about the EAR or Your obligations under those regulations, please refer to the U.S. Bureau of Industry and Security’s website at <http://www.bis.doc.gov/>.
7. If You are a part of the U.S. Government, then the Specification is provided with “RESTRICTED RIGHTS” as set forth in subparagraphs © (1) and (2) of the Commercial Computer Software-Restricted Rights clause at FAR 52.227-14 or subparagraph (c) (1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7013, as applicable.
8. This Agreement is governed by the laws of the State of California without regard to its choice of law principles. Any dispute involving it must be brought in a court having jurisdiction of such dispute in Santa Clara County, California, and You waive any defenses and rights allowing the dispute to be litigated elsewhere. If any part of this agreement is unenforceable, it will be considered modified to the extent necessary to make it enforceable, and the remainder shall continue in effect. The failure of AMD to enforce any rights granted hereunder or to take action against You in the event of any breach hereunder shall not be deemed a waiver by AMD as to subsequent enforcement of rights or subsequent actions in the event of future breaches. This Agreement is the entire agreement between You and AMD concerning the Specification; it may be changed only by a written document signed by both You and an authorized representative of AMD.

Contents

Revision History	8
Chapter 1 Introduction	9
1.1 Purpose.....	9
1.2 Supplier Requirements.....	10
Chapter 2 Microprocessor Package Description	11
Chapter 3 Socket Mechanical Requirements	13
3.1 Socket Outline	13
3.2 Package Seating Plane	14
3.2.1 Package Supports and Seating Plane Dimensional Requirements	15
3.2.2 Measurement Method for Package Supports and Seating Plane	15
3.3 Socket Base and Socket Cover.....	20
3.3.1 Socket Markings	20
3.4 Socket Contact.....	21
3.4.1 Contact Base Metal	21
3.4.2 Contact Plating.....	21
3.4.3 Surface Mount Technology (SMT) Solder Balls	21
3.5 Socket Actuation Lever	22
3.5.1 Lever Material	22
3.5.2 Package Insertion and Extraction Force.....	22
3.5.3 Socket Retention Force	22
3.5.4 Locking Latch.....	22
3.5.5 Lever Actuation and Deactuation Force.....	22
3.5.6 Pin Field Actuation Displacement	22
3.6 Socket Durability.....	22
3.7 Visual Inspection	22
3.7.1 Solder Balls.....	23
3.7.2 Contacts	23
3.7.3 Cover and Base	23
3.7.4 Actuation Lever	23
3.8 Critical-to-Function Parameter List.....	23

Chapter 4	Socket Electrical Requirements	25
4.1	Contact Current Rating	25
4.2	Low Level Circuit Resistance (LLCR)	25
4.2.1	Initial Resistance	25
4.2.2	Final Resistance	25
4.3	Inductance	26
4.4	Capacitance.....	26
4.5	Differential Impedance.....	26
4.6	Propagation Delay.....	26
4.7	Cross Talk.....	26
4.8	Dielectric Withstanding Voltage (DWV).....	27
4.9	Insulation Resistance (IR)	27
Chapter 5	Socket Environmental Requirements	29
5.1	Thermal Shock.....	29
5.2	Cyclic Humidity.....	29
5.3	Thermal Cycling	29
5.4	Temperature Life	29
5.5	Industrial Mixed Flowing Gas.....	30
5.6	Mechanical Shock.....	30
5.7	Random Vibration.....	30
5.8	Resistance to Solder Heat.....	30
5.9	Resistance to Solvents.....	30
5.10	Heatsink Assembly	30

List of Figures

Figure 1. A 3-D View of Socket FM1	9
Figure 2. AMD 905-Pin Organic μ PGA Package Drawing	11
Figure 3. Socket FM1 Outline	13
Figure 4. Allowable PCB Component Keep-In, Keep-Out Area	14
Figure 5. Illustration of Outer Region Measurement Points	16
Figure 6. Definition of Step Height	17
Figure 7. Illustration of Best Fit Plane	17
Figure 8. Illustration of Center Support Ring Measurement Points	18
Figure 9. Illustration of Inner Support Posts Measurement Locations	19
Figure 10. Illustration of Center Support Ring and Inner Support Posts Measurement Method	20

List of Tables

Table 1. Package Supports and Seating Plane Dimensional Requirements	15
Table 2. Socket FM1 Critical-to-Function Parameters	23

Revision History

Date	Revision	Description
August 2011	3.00	Initial Public release.

Chapter 1 Introduction

This design specification defines the requirements for a 905-pin, 1.27-mm pitch, surface mount technology (SMT), zero insertion force (ZIF) socket (herein referred to as the Socket FM1) for use with the Advance Micro Devices (AMD) 905-pin organic, micro pin grid array (μ PGA) package. The Socket FM1, shown in Figure 1, is designed to provide a reliable electrical interconnect between the printed circuit board (PCB) and the 905 pins of the organic μ PGA package, throughout the life of the product.

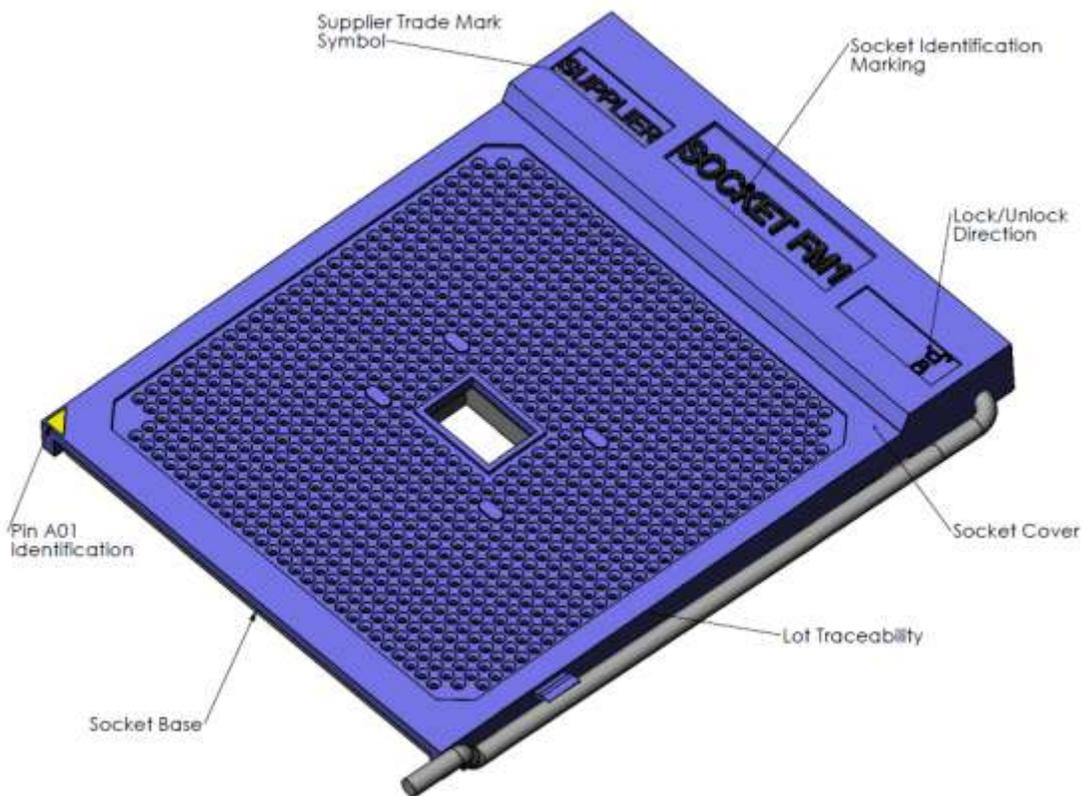


Figure 1. A 3-D View of Socket FM1

1.1 Purpose

This design specification specifies the dimensional, mechanical, electrical, and reliability requirements for the Socket FM1 that are necessary to meet the performance requirements of AMD microprocessor products.


1.2 Supplier Requirements

To become a qualified supplier for the Socket FM1, the potential socket supplier must demonstrate that their product meets the requirements listed in this document and must conduct qualification testing on their production run sockets in accordance with the *Socket FM1 Qualification Plan*, order# 47609.

Chapter 2 Microprocessor Package Description

Figure 2 on page 11 provides dimensional information for the 905-pin organic μ PGA package that mates with the Socket FM1.

Socket FM1 is designed to be functional with the lidded, as well as with the lidless, package configuration.

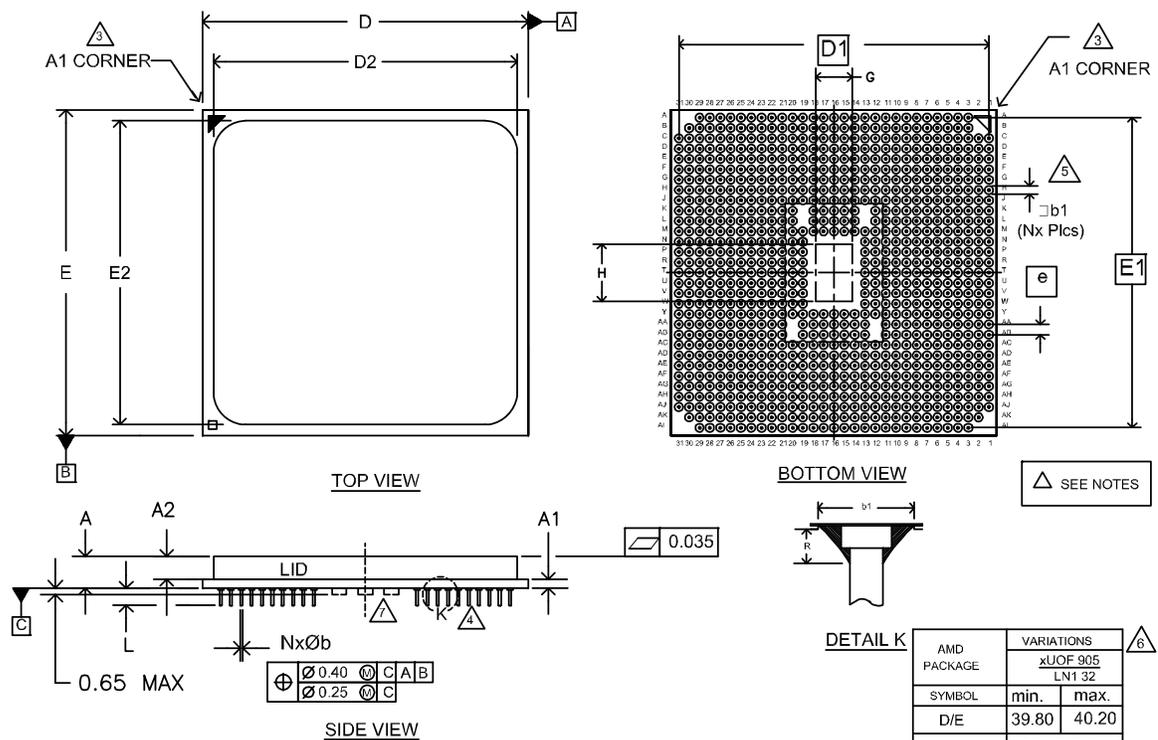

GENERAL NOTES

1. All dimensions are specified in millimeters (mm).
2. Dimensioning and tolerancing per ASME-Y14.5M-1994.
3. The A1 corner contains a triangle on both sides of the package that can be used for handling and orientation purposes.
4. Pin tips should have radius 0.13.
5. Symbol "M" determines pin matrix size and "N" is number of pins.
6. "x" in front of package variation denotes non-qualified package per AMD 01-002.3.
7. Bottom side chip caps are optional based on product requirements.

Figure 2. AMD 905-Pin Organic μ PGA Package Drawing

Chapter 3 Socket Mechanical Requirements

This chapter describes the socket outline and mechanical requirements for the Socket FM1.

3.1 Socket Outline

Figure 3 shows the maximum allowable outline for the Socket FM1. All dimensions are shown in millimeters.

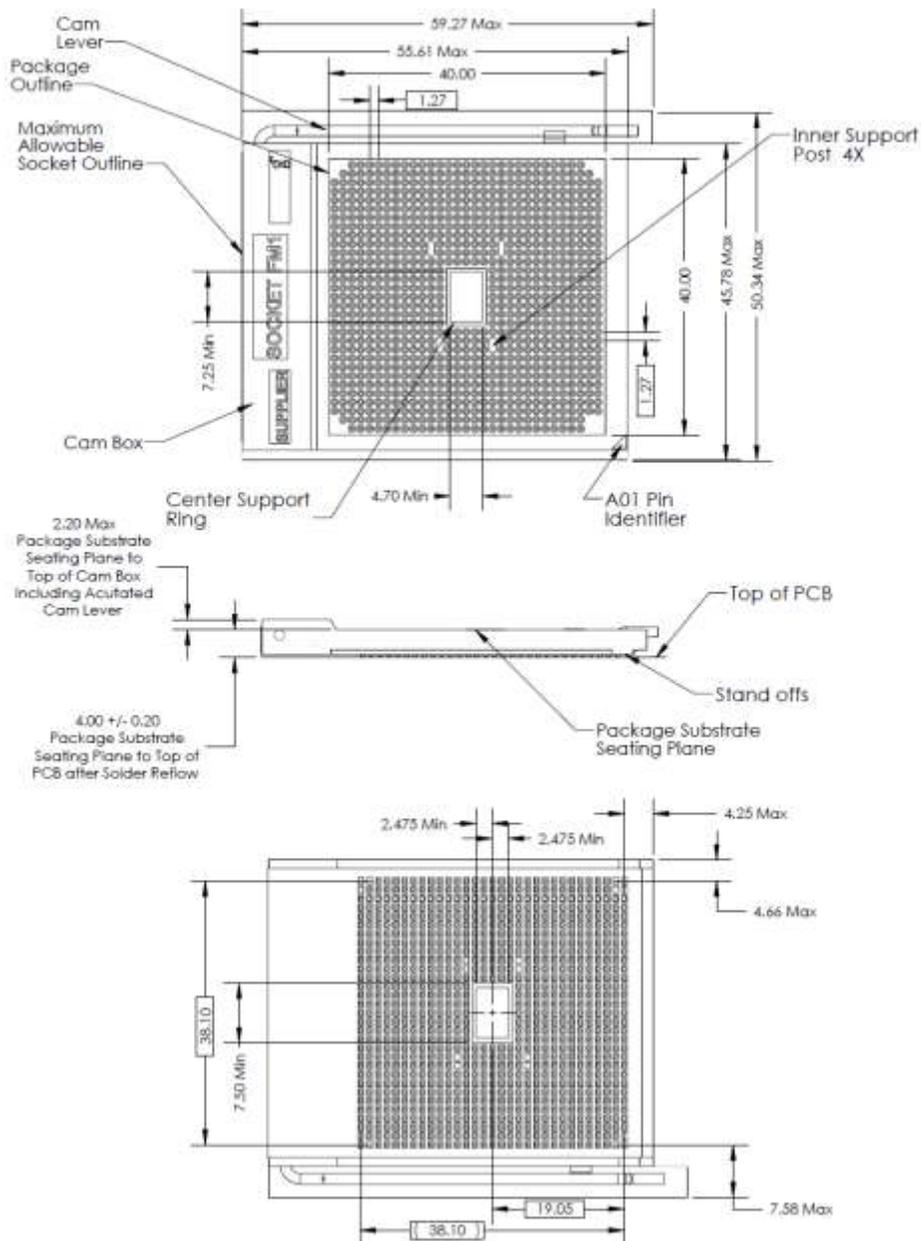


Figure 3. Socket FM1 Outline

The allowable component keep-in area within the socket housing cavity on the PCB is shown in Figure 4. The height of the devices mounted on the PCB within the keep-in area of the socket housing must be less than 2.00 mm.

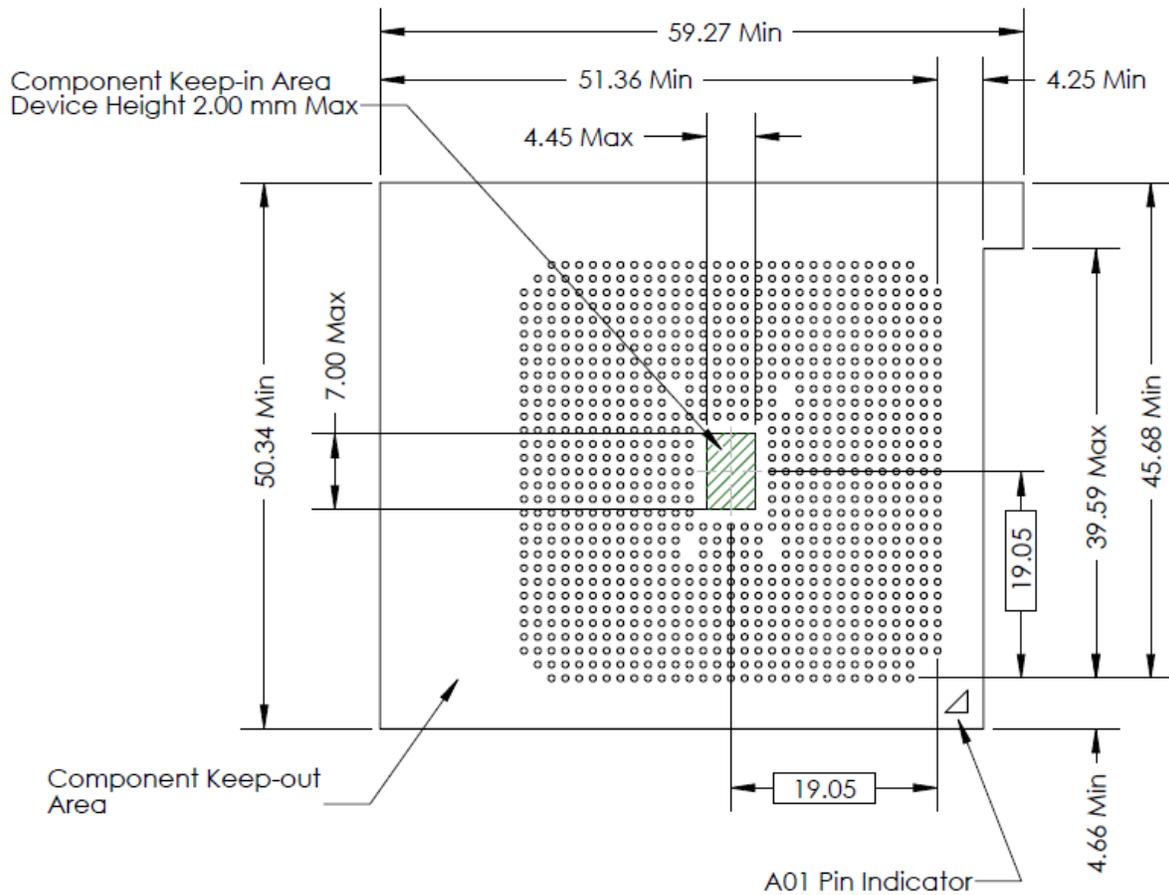


Figure 4. Allowable PCB Component Keep-In, Keep-Out Area

3.2 Package Seating Plane

The cover for the Socket FM1 is designed to accommodate the package pin shoulder and braze/solder fillet as shown by the 905-pin organic μ PGA package drawings in Figure 2, on page 11. Package support structures are incorporated into the socket cover to provide sufficient mechanical support (seating plane) for the package substrate without causing damage to the package pins at any time.

The package-seating plane on the socket cover has a surface flatness of 0.25 mm or smoother when unmated, as well as when mated, with a package. After the socket is mounted to the PCB,

the package-seating plane on the socket cover is $4.00 \text{ mm} \pm 0.20 \text{ mm}$ from the mounting surface of the PCB.

3.2.1 Package Supports and Seating Plane Dimensional Requirements

To ensure proper support of the processor package while it is situated in the socket, the outer support region of the package seating plane, the center support ring, the inner support posts (indicated in Figure 3 on page 13), and the socket base must meet the dimensional requirements shown in Table 1.

Table 1. Package Supports and Seating Plane Dimensional Requirements

Item No.	Requirement
1	The outer support region step height is $0.30 \text{ mm} \pm 0.05 \text{ mm}$.
2	The flatness of the outer support region must not exceed 0.25 mm .
3	The center support ring is $+0.06 \text{ mm} \pm 0.05 \text{ mm}$ above the least mean squares defined plane (LMS1) of the outer support region.
4	The inner support posts are $-0.02 \text{ mm} +0.02/-0.08 \text{ mm}$ from the least mean squares defined plane (LMS2) of the center support ring.

Refer to measurement requirements in Section 3.2.2.

3.2.2 Measurement Method for Package Supports and Seating Plane

The features in Section 3.2.1 must be measured using the methodologies shown in Sections 3.2.2.1 through 3.2.2.4, on pages 15 through 18, respectively.

3.2.2.1 Measurement Conditions

The socket to be measured must be reflowed to a PCB using the recommended reflow process for the socket for the particular solder ball composition.

Note: A fixture that maintains the socket cover in contact with the socket base at the inner seating plane supports must be used for the socket measurement.

3.2.2.2 Outer Support Region Step Height Measurement

Measure the outer step height at 24 evenly-spaced points (6 per side) around the outer support using a local point-to-point method as shown in Figure 5.

The step height is the difference in height between a point on the outer support region and an adjacent point on the recessed plane of the socket. See Figure 6, on page 17, for the definition of step height.

Note: The step height must conform to the dimensional requirements of item 1, in Table 1, on page 15.

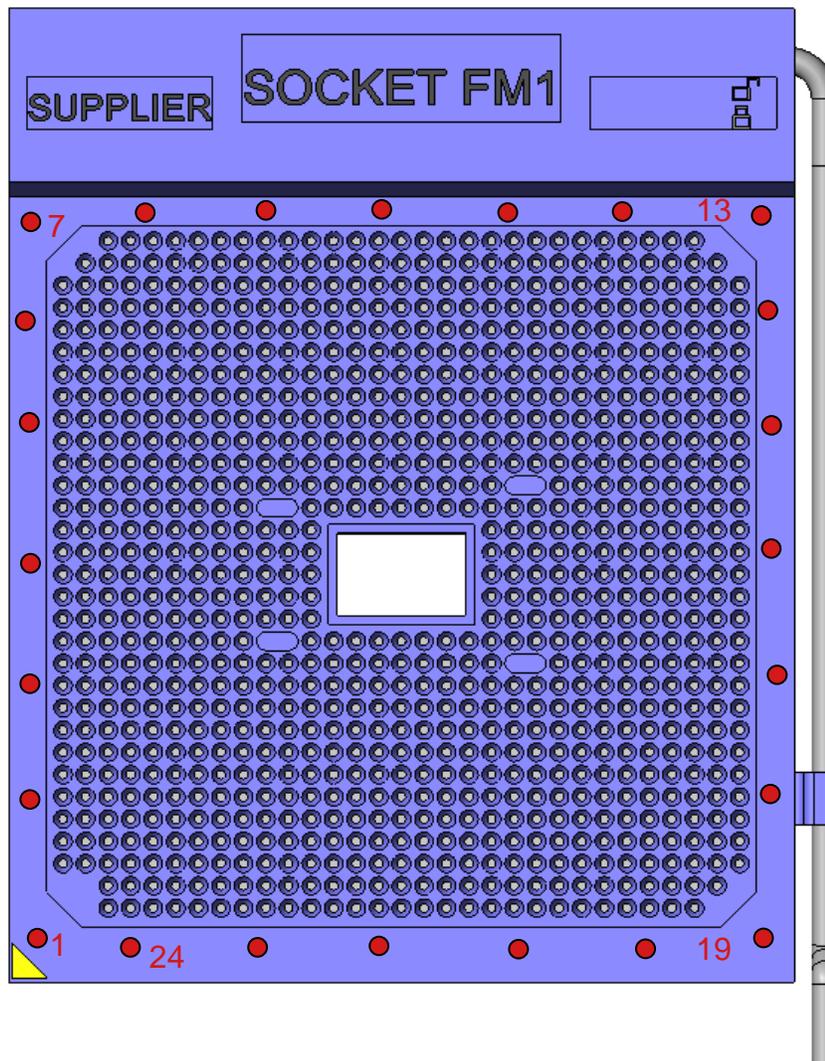


Figure 5. Illustration of Outer Region Measurement Points

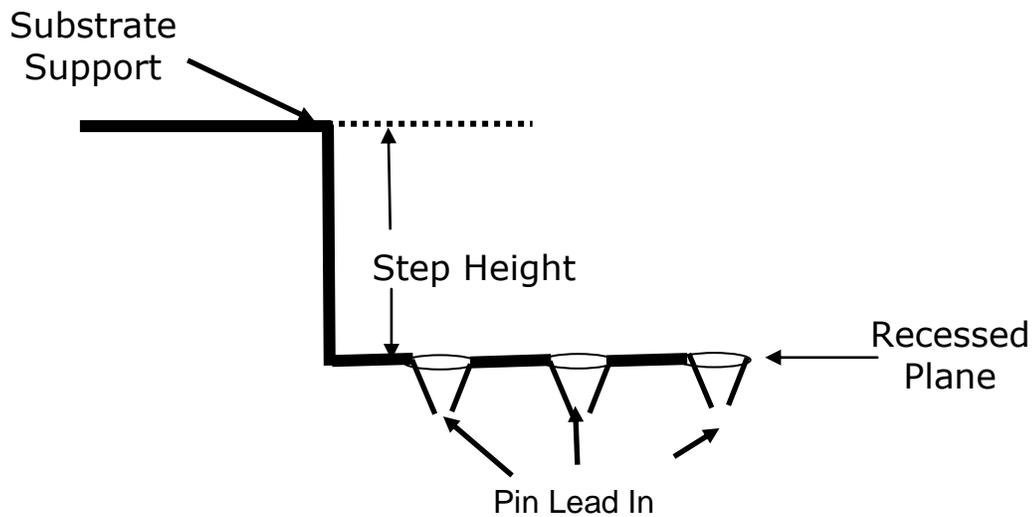


Figure 6. Definition of Step Height

3.2.2.3 Outer Support Region Flatness Measurement

Determine the best fit plane, using the least mean squares (LMS) method, for the 24 points measured on outer support region used in the step height measurement in section 3.2.2.2 on page 16.

Calculate the normal distance from each point to the LMS plane. Outer support region flatness equals the maximum normal distance of all points above the LMS plane minus the maximum normal distance of all points beneath the LMS plane (the distance of all points beneath the LMS plane is a negative number). Refer to Figure 7 for more detail.

Note: The outer support region flatness must meet the condition in item 2, of Table 1, on page 15.

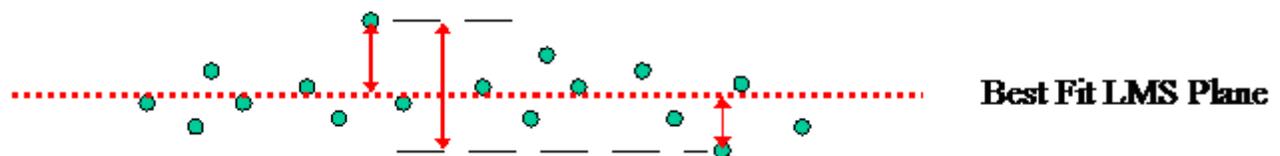


Figure 7. Illustration of Best Fit Plane

3.2.2.4 Center Support Ring Height Measurement

Measure the center support ring height at eight evenly-spaced points (points 29 to 36 as shown in Figure 8) around the center support ring using a local point-to-plane method.

The height is the difference between a point on the center support ring relative to the outer support region least mean square plane (LMS). Refer to Figure 10, on page 19, for an illustration of the measurement method.

Note: The center support ring height must conform to the dimensional requirements of item 3, in Table 1, on page 15.

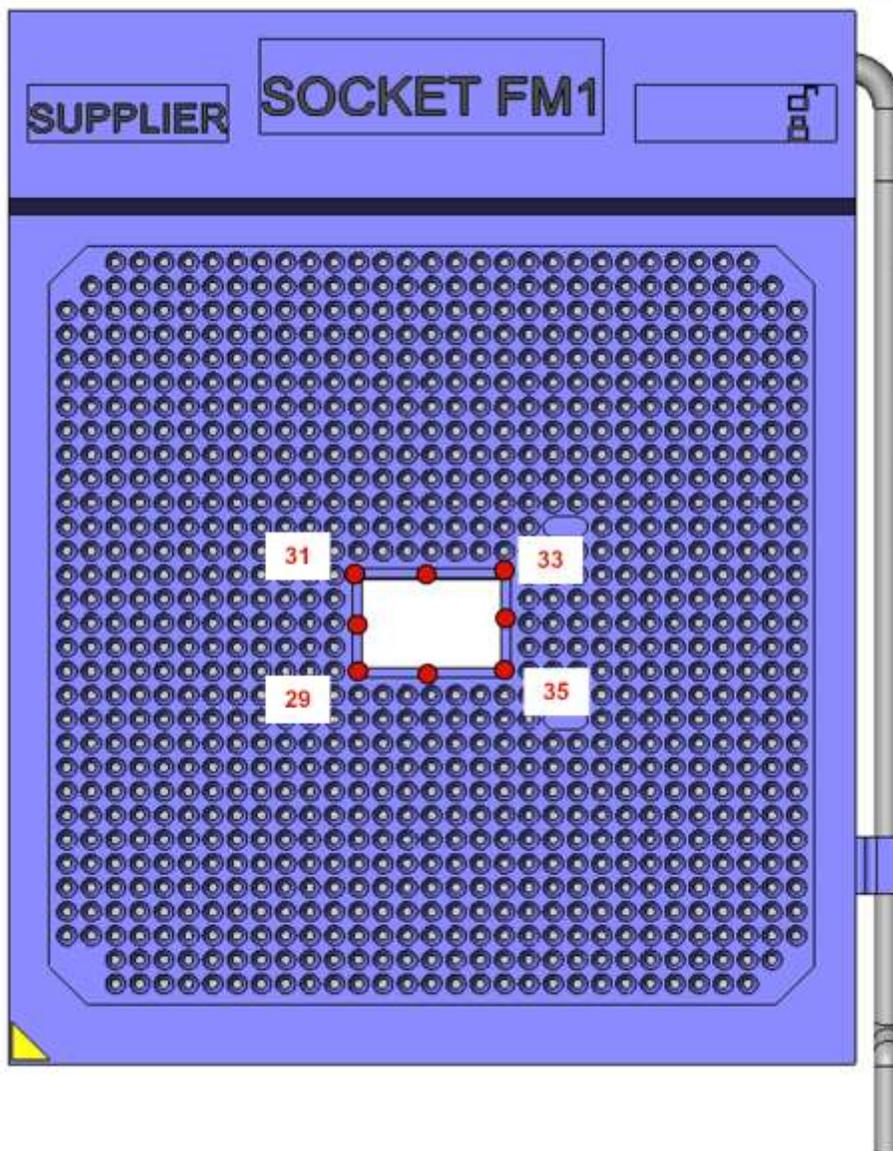


Figure 8. Illustration of Center Support Ring Measurement Points

3.2.2.5 Inner Support Post Height Measurement

Determine the best fit plane, using the least mean squares (LMS) method, for the eight points measured on the center support ring used in the height measurement in section 3.2.2.4 on page 18.

Measure the inner support posts height (points 25 to 28 as shown in Figure 9, on page 19) using a local point-to-plane method.

The height is the difference between a point on the inner support post relative to the center support least mean square plane LMS. Refer to Figure 10, on page 20, for an illustration of the measurement method.

Note: The inner support posts height must conform to the dimensional requirements of item 4, in Table 1, on page 15.

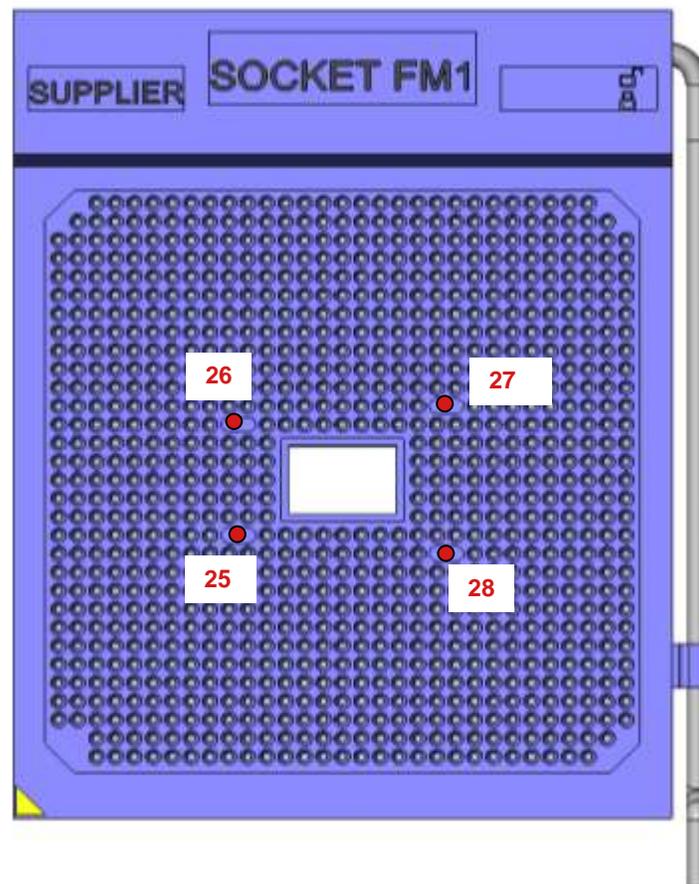


Figure 9. Illustration of Inner Support Posts Measurement Locations

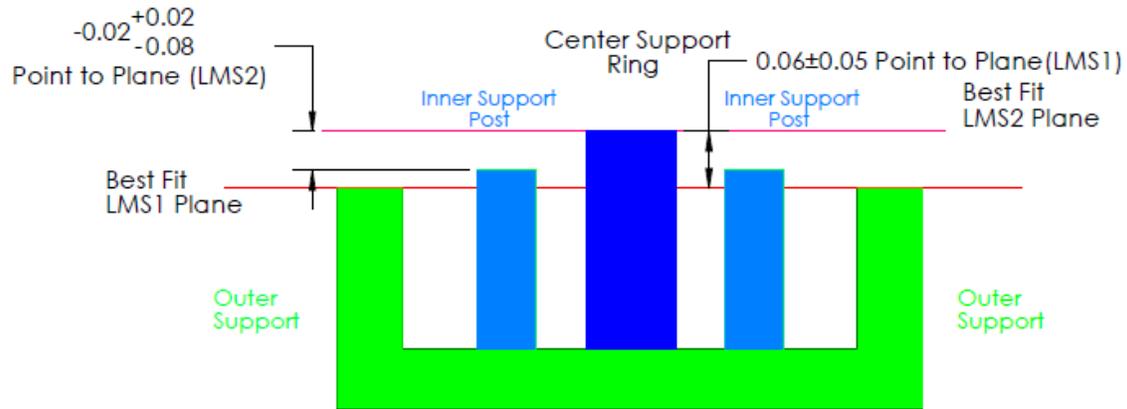


Figure 10. Illustration of Center Support Ring and Inner Support Posts Measurement Method

3.3 Socket Base and Socket Cover

The socket base and socket cover are made from liquid crystal polymer (LCP) with a UL flammability rating of 94 V-0. The colors for the socket base and cover are as follows:

- Socket base color — black
- Socket cover color — natural or ivory

The thickness of the socket cover (including the 0.30-mm pocket recess) must not exceed 1.17 mm. The socket cover flatness must be less than 0.25 mm before and after the SMT reflow to the PCB. The flatness measurement must be less than 0.25 mm after environmental and mechanical testing.

Either a removable tape or plastic cover acts as an overlay for the pinholes in the top of the socket cover. The overlay facilitates socket pick-and-place operation with a vacuum nozzle during board assembly. The overlay must not outgas during the solder reflow processes or leave any residue upon removal prior to package pins insertion.

3.3.1 Socket Markings

The requirements for socket markings are as follows:

- The socket identifier marking “SOCKET FM1” must be molded into the top surface of the socket cover cam box region. See Figure 1, on page 9.
- A locked and unlocked directional designator is molded into the top surface of the cam box in close proximity to the actuation lever. See Figure 1, on page 9.

- A triangular shape symbol must be molded into the top of the socket cover for proper package pin A01 orientation. This orientation symbol is located to remain visible after the package is mated to the socket as shown in Figure 1, on page 9, and Figure 3, on page 13.
- The supplier's UL approved symbol must be molded on the socket cover. Locate this marking to allow visibility and readability after the socket is solder mounted onto the PCB.
- The lot traceability number can be ink, laser, or impact marked on the socket cover. Locate the marking to be visible and readable after the socket is solder mounted onto the PCB.

3.4 Socket Contact

This section describes the contact material and solder balls for socket attachment to the PCB.

Note: No lubricants can be present on the contact mating areas of fully assembled sockets that are shipped to customers by the supplier.

3.4.1 Contact Base Metal

The contact base metal is made of high-strength copper alloy.

3.4.2 Contact Plating

The specifications for the contact plating are as follows:

- The entire contact is plated with 1.27- μm minimum thickness of nickel.
- The contact mating area is plated with 0.25- μm minimum thickness of gold over the 1.27 μm minimum thickness of nickel underplating. Gold porosity in the contact mating areas must be monitored, with no more than two pores with a diameter greater than 0.05 mm allowed per set of 25 contacts examined.

3.4.3 Surface Mount Technology (SMT) Solder Balls

The specifications for the surface mount technology (SMT) solder balls are as follows:

- The socket is mounted to the PCB by SMT. The PCB solder pad diameter is 0.56 mm.
- The solder balls on the socket have a diameter of 0.76 ± 0.15 mm and are either leaded or lead-free in composition.
- Leaded solder ball composition is tin/lead (63/37 \pm 5%).
- Lead-free solder ball composition can be Sn4.0Ag0.5Cu (SAC405), Sn3.0Ag0.5Cu (SAC305), or Sn3.5Ag.
- The contact must include a solder barrier feature to prevent solder from wicking up into the contact mating area during solder reflow.
- The Socket FM1 solder ball field must meet the co-planarity requirement of 0.20 mm.
- The force required to shear off the solder ball from the contact must be a minimum of 0.75 kgf.

3.5 Socket Actuation Lever

The socket incorporates a lever to the right side of the cam box for actuating and deactuating the socket contacts with the package pins. This actuation lever provides the mechanical advantage to easily actuate the socket in an OEM high-volume manufacturing environment and also facilitates tool-less socket actuation and deactuation operations by the end-user.

3.5.1 Lever Material

Stainless steel is the recommended material for the actuation lever.

3.5.2 Package Insertion and Extraction Force

With the actuation lever in the open position, the package insertion and extraction forces, conceptually, are zero. These insertion and extraction forces must not exceed 2 kgf in actual applications.

3.5.3 Socket Retention Force

With the actuation lever in the closed position, the force required to extract the package pins out of the socket contacts must be a minimum of 0.013 kgf per pin.

3.5.4 Locking Latch

The socket cover incorporates a latch mechanism to lock the lever in the closed position after the socket contacts are mated with the package pins. Support tab(s) are added to the socket cover to cradle the actuation lever in the closed position. The tab(s) prevent the actuation lever from contacting the PCB.

3.5.5 Lever Actuation and Deactuation Force

The force required to actuate or deactuate the lever must be less than 3.6 kgf.

3.5.6 Pin Field Actuation Displacement

The package pins must be displaced less than 1.0 mm during socket actuation or deactuation.

3.6 Socket Durability

The socket must maintain electrical and mechanical integrity after 50 actuation and deactuation cycles with each mating package used no more than 5 mating cycles.

3.7 Visual Inspection

All visual inspections must be at 1X magnification, except for solder balls that must be inspected at 5X magnification.

3.7.1 Solder Balls

No missing, malformed, damaged, or misaligned solder balls attached to the contacts are allowed.

3.7.2 Contacts

No missing or damaged contacts that prevent the socket from functioning properly are allowed. Contact mating surface must not be missing gold plating.

After socket is reflowed onto the board, both arms of socket contact must be visible through the cover pin hole when the actuation lever is at approximately 45 degrees.

3.7.3 Cover and Base

No cracks or flashing visible on the socket cover and base are allowed. All tabs that secure the socket cover to the base must not be damaged or missing. The socket cover must fit properly on the socket base with no visible gap between them. The lever latch cannot be damaged or malformed.

3.7.4 Actuation Lever

The actuation lever cannot be damaged, malformed, or missing.

3.8 Critical-to-Function Parameter List

All critical-to-function parameters are identified in Table 2 on page 23. These parameters must be verified on 100% of the socket during production or on a sampling basis as a part of quality control process (as specified by AMD).

Table 2. Socket FM1 Critical-to-Function Parameters

Critical-to-Function Parameter List					
List	Parameters	Nominal	Tolerance	Unit	Monitoring
1	Socket Length	59.27	Max	mm	Sampling
2	Socket Width	50.34	Max	mm	Sampling
3	Socket Seating Plane Height From Top of PCB after SMT	4.00	+/-0.20	mm	Sampling
4	Solder Ball Size	0.76	+/-0.15	mm	100%
5	Solder Ball Pitch	1.27	Basic	mm	100%
6	Solder Ball Pattern TP	0.4	Max	mm	100%
7	Solder Ball Feature TP	0.25	Max	mm	100%
8	Solder Ball Co-Planarity	0.2	Max	mm	100%
9	Cover Pin Hole Diameter before SMT	Supplier Specific		mm	Sampling
10	Cover Pin Hole Diameter after SMT	Supplier Specific		mm	Sampling

Table 2. Socket FM1 Critical-to-Function Parameters (Continued)

Critical-to-Function Parameter List					
List	Parameters	Nominal	Tolerance	Unit	Monitoring
11	Cover Flatness before SMT	0.25	Max	mm	Sampling
12	Cover Flatness after SMT	0.25	Max	mm	Sampling
13	Cover Pin Hole Pitch before SMT	1.27	Basic	mm	Sampling
14	Cover Pin Hole Pitch before SMT	1.27	Basic	mm	Sampling
15	Cover Pin Hole Pattern TP before SMT	0.25	Max	mm	Sampling
16	Cover Pin Hole Pattern TP after SMT	0.25	Max	mm	Sampling
17	Cover Pin Hole Feature TP before SMT	0.13	Max	mm	Sampling
18	Cover Pin Hole Feature TP after SMT				
19	Contact Pattern TP before SMT	Supplier Specific		mm	Sampling
20	Contact Pattern TP after SMT	0.25	Max	mm	Sampling
21	Contact Feature TP before SMT	Supplier Specific		mm	Sampling
22	Contact Feature TP after SMT	0.13	Max	mm	Sampling
23	Cam Box Height from Top of package Seating Plane	2.2	Max	mm	Sampling
24	Center Support Ring Height from Outer Support Region (LMS1)	0.06	+/-0.05	mm	Sampling
25	Inner support Post Height from Top of Center Support Ring (LMS2)	-0.02	+0.02/-0.08	mm	Sampling
26	Outer Support Region Height(recessed for the Package pin fillet clearance)	0.30	+/-0.05	mm	Sampling
27	Cover Cavity Length	7.25	Min	mm	Sampling
28	Cover Cavity Width	4.70	Min	mm	Sampling
29	Base Cavity Length	7.50	Min	mm	Sampling
30	Base Cavity Width	4.95	Min	mm	Sampling
31	Contact Gold Plating Thickness	0.25	Min	um	Sampling
32	Contact Ni Plating Thickness	1.27	Min	um	Sampling
33	Contact Gap	Supplier Specific		mm	100%
34	Contact Normal Force (RSS)	15 to 30		gram	Sampling
35	Lever Actuation Force	3.60	Max	kgf	Sampling

Chapter 4 Socket Electrical Requirements

This chapter describes the contact current rating, inductance, capacitance, differential impedance, propagation delay, cross talk, dielectric withstanding voltage, and insulation resistance of the Socket FM1.

4.1 Contact Current Rating

The contact must be rated at a current rating of 1.5 A per contact with less than 30°C temperature rise and with a minimum of ten rows of mated contacts and pins energized.

4.2 Low Level Circuit Resistance (LLCR)

Contact resistance applies to the mounted socket with actuated package pin and includes the bulk resistance of the contact, solder ball, package pin, and the interface resistance between the contact and the package pin, but does not include the package internal trace resistance.

4.2.1 Initial Resistance

Initial contact resistance must be measured immediately after the first mating of the package pins to the socket contacts. The 450 daisy-chained pairs (900 contact locations) must be measured per socket sample. Initial LLCR must not exceed 20 mΩ per contact when mated with Cu Alloy-194 pins, based on measurements made on a daisy-chained pair of contacts.

4.2.2 Final Resistance

Final contact resistance must be measured after the mechanical and environmental testing of the mated package and socket is complete. The same 450 daisy-chained pairs (900 contact locations) must be measured per socket sample. Final LLCR must not exceed 20 mΩ per contact when mated with Cu Alloy-194 pins, based on measurements made on a daisy-chained pair of contacts.

4.3 Inductance

The inductance specifications for the Socket FM1 are as follows:

- The mated, partial self-inductance of a single pin must be less than 4 nH.
- The mated-loop inductance of two nearest pins must be less than 3.3 nH.
- The mated partial-loop inductance matrix of three neighboring pins must be less than 3.3 nH for the diagonal entries, and must be less than 2.2 nH for the off-diagonal entries.

Note: Measurements are made at frequencies of 500 MHz and 2 GHz.

4.4 Capacitance

The capacitance specifications for the Socket FM1 are as follows:

- The mated capacitance between two nearest pins must be less than 1 pF.
- The mated capacitance matrix of three neighboring pins must be less than 1 pF.

Note: Measurements are made at frequencies of 500 MHz and 2 GHz.

4.5 Differential Impedance

The differential (or odd mode) impedance for three, mated-pins configuration (one pin as the voltage/current reference—S1, S2, and G) must be $100 \Omega \pm 10\%$ between the two nearest pins (with an additional $\pm 2\text{-}\Omega$ measurement error). If the Time Domain Method is used, the signal must have a rise time of 150 ps for the signal amplitude to go from 10% to 90%.

4.6 Propagation Delay

The propagation delay specifications for the Socket FM1 are as follows:

- The propagation delay skew among single-ended signals must be less than 10 ps, plus a maximum measurement error of 3 ps.
- The propagation delay skew among differential signal pairs must be less than 10 ps, plus a maximum measurement error of 3 ps.

4.7 Cross Talk

Cross talk between the nearest single-ended and differential signals must be measured and compared to results from the measured partial-loop inductance and the Maxwell capacitance matrices.

4.8 Dielectric Withstanding Voltage (DWV)

The contact-to-contact dielectric withstanding voltage between randomly selected adjacent lateral, diagonal, and vertical contacts must be a minimum of 650 VAC.

4.9 Insulation Resistance (IR)

The contact-to-contact insulation resistance between randomly selected adjacent lateral, diagonal, and vertical contacts must be a minimum of 1000 MΩ.

Chapter 5 Socket Environmental Requirements

This section describes the socket design required to meet reliability requirements for the end-user field-use environment, OEM high volume manufacturing environment, and shipping and handling conditions of desktop computers.

5.1 Thermal Shock

Sockets must meet LLCR and visual inspection requirements after being subjected to 10 thermal shock cycles with the cold temperature extreme at -55°C and the hot temperature extreme at $+110^{\circ}\text{C}$. The dwell at each temperature extreme is 30 minutes with less than 15 seconds transition time. The test should be conducted with the associated heatsink assembly (AMD part number 7120038000G) attached to the processor package.

5.2 Cyclic Humidity

Sockets must meet low-level circuit resistance (LLCR), dielectric withstanding voltage (DWV), insulation resistance (IR), and visual inspection requirements after being subjected to 1000 hours of cyclic humidity tests with a cycle time of eight hours. Temperature range is 25°C to 85°C with relative humidity maintained between 90% to 95%. This test should be conducted with the associated heatsink assembly (AMD part number 7120038000G) attached to the processor package.

5.3 Thermal Cycling

Sockets must meet LLCR and visual inspection requirements after being subjected to a minimum of 1000 cycles of thermal cycles with testing continued until 60% of the sockets fail or 3000 cycles are completed. Cold temperature extreme is -55°C with a dwell time of 20 minutes, and hot temperature extreme is $+110^{\circ}\text{C}$ with a dwell time of 15 minutes. The average rate of temperature change between the hot and cold temperature extremes must not exceed 10°C per minute. This test should be conducted with the associated heatsink assembly (AMD part number 7120038000G) attached to the processor package.

5.4 Temperature Life

Sockets must meet LLCR and visual inspection requirements after being subjected to 500 hours of temperature life testing at 115°C . This test should be conducted with the associated heatsink assembly (AMD part number 7120038000G) attached to the processor package.

5.5 Industrial Mixed Flowing Gas

Sockets must meet LLCR and visual inspection requirements after being subjected to mixed flowing gas testing with half the samples mated and the other half samples unmated for the first five days, and then all samples mated for the final five days. The test temperature is 30°C with a relative humidity of 70%. Mixed flowing gas constituents are 10-ppb chlorine, 10-ppb hydrogen sulfide, 200-ppb nitrogen dioxide, and 100-ppb sulfur dioxide.

5.6 Mechanical Shock

Sockets must meet LLCR, continuity intermittency of less than 1- μ s duration, and visual inspection requirements after being subjected to mechanical shock testing at 50 g, 11-ms duration, half-sine waveform with three shocks per positive and negative directions on all three axes — totaling 18 shocks. This test should be conducted with the associated heatsink assembly (AMD part number 7120038000G) attached to the processor package.

5.7 Random Vibration

Sockets must meet LLCR, continuity intermittency of less than 1- μ s duration, and visual inspection requirements after being subjected to random vibration testing at 3.1 g rms between 20 Hz to 500 Hz for duration of 45 minutes per axis for each of the three axes. This test should be conducted with the associated heatsink assembly (AMD part number 7120038000G) attached to the processor package.

5.8 Resistance to Solder Heat

Sockets must meet LLCR, cover flatness, and visual inspection requirements after being subjected to four convection-solder-reflow processes for mounting the socket to the PCB. No deterioration of the markings on the socket is allowed.

5.9 Resistance to Solvents

Sockets must meet visual inspection requirements after being subjected to the Four Solutions test. No deterioration of the markings on the socket is allowed.

5.10 Heatsink Assembly

The associated heatsink assembly (AMD part number 7120038000G) attached to the processor package in the environmental testing can weigh up to 450 grams.