


UNIDENTIFIED SNB-C035

Data bus: 16-bit, ISA
 Size: Half-length, half-height card
 Hard drives supported: Two IDE Interface (AT)
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB
 Maximum heads/cyl.: 8 heads and 1024 cylinders

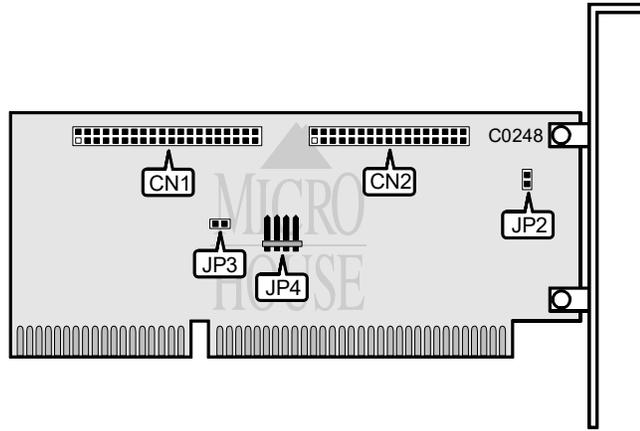

CONNECTIONS	
Function	Location
40-pin AT Interface (IDE) control cable connector-internal	CN1
34-pin data cable connector-floppy drive	CN2
4-pin connector-drive active LED	JP4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive port address is 3F0-3F7h	JP2	open
Floppy drive port address is 370-377h	JP2	closed
í IO CHRDY (I/O Channel Ready) disabled	JP3	open
IO CHRDY (I/O Channel Ready) enabled	JP3	closed

