


UNIDENTIFIED SNB-C038

Q4/92

Data bus: 16-bit, ISA
 Size: Half-length, half-height card
 Hard drives supported: Two IDE Interface (AT) drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB

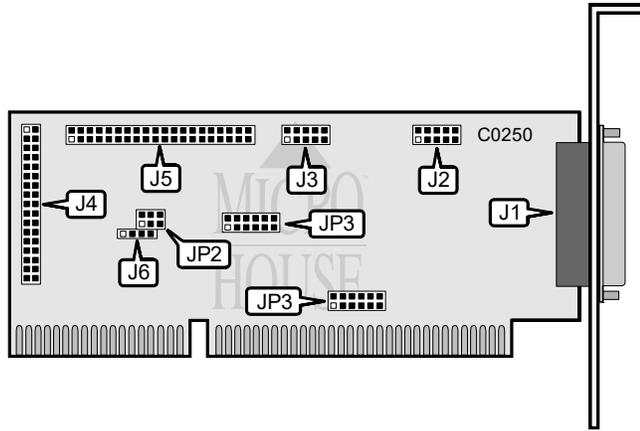

CONNECTIONS	
Function	Location
25-pin parallel port-external	J1
9-pin serial port 1 (COM1/3/4)-internal	J2
9-pin serial port 2 (COM2/3/4)-external	J3
34-pin control cable connector-floppy drive	J4
40-pin IDE Interface (AT) connector	J5
4-pin connector-drive active LED	J6

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive enabled	JP2	pins 1 & 2 closed
Floppy drive disabled	JP2	pins 1 & 2 open
í Hard drive enabled	JP2	pins 3 & 4 closed
Hard drive disabled	JP2	pins 3 & 4 open
í IOCHRDY signal enabled	JP2	pins 5 & 6 closed
IOCHRDY signal disabled	JP2	pins 5 & 6 open

Continued on next page . . .

**UNIDENTIFIED
SNB-C038**

... continued from previous page

SERIAL PORT 1 (CN2) CONFIGURATION		
COM	JP1/pins 1 & 2	JP1/pins 3 & 4
í COM1 (3F8-3FFh)	closed	open
COM3 (3E8-3EFh)	open	closed
COM4 (2E8-2EFh)	closed	closed
Disabled	open	open

SERIAL PORT 2 (CN3) CONFIGURATION		
COM	JP1/pins 5 & 6	JP1/pins 7 & 8
í COM2 (2F8-2FFh)	closed	open
COM4 (2E8-2EFh)	open	closed
COM3 (3E8-3EFh)	closed	closed
Disabled	open	open

PARALLEL PORT (CN1) CONFIGURATION		
LPT	JP1/pins 9 & 10	JP1/pins 11 & 12
í LPT2 (378-37Fh)	closed	open
LPT3 (278-27Fh)	open	closed
Disabled	open	open

SERIAL PORT 1 (CN2) INTERRUPT REQUEST		
IRQ	JP3/pins 1 & 2	JP3/pins 3 & 4
í IRQ4	closed	open
IRQ3	open	closed

SERIAL PORT 2 (CN3) INTERRUPT REQUEST		
IRQ	JP3/pins 5 & 6	JP3/pins 7 & 8
í IRQ3	closed	open
IRQ4	open	closed

PARALLEL PORT (CN1) INTERRUPT REQUEST		
IRQ	JP3/pins 9 & 10	JP3/pins 11 & 12
í IRQ7	closed	open
IRQ5	open	closed