


# UNIDENTIFIED RST 386 CACHE SERIES

<b>Processor</b>	80386DX
<b>Processor Speed</b>	33MHz
<b>Chip Set</b>	Unknown
<b>Max. Onboard DRAM</b>	8MB
<b>Cache</b>	32/64/128KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	330.2mm x 218.4mm
<b>I/O Options</b>	32-bit external memory card slot
<b>NPU Options</b>	80387

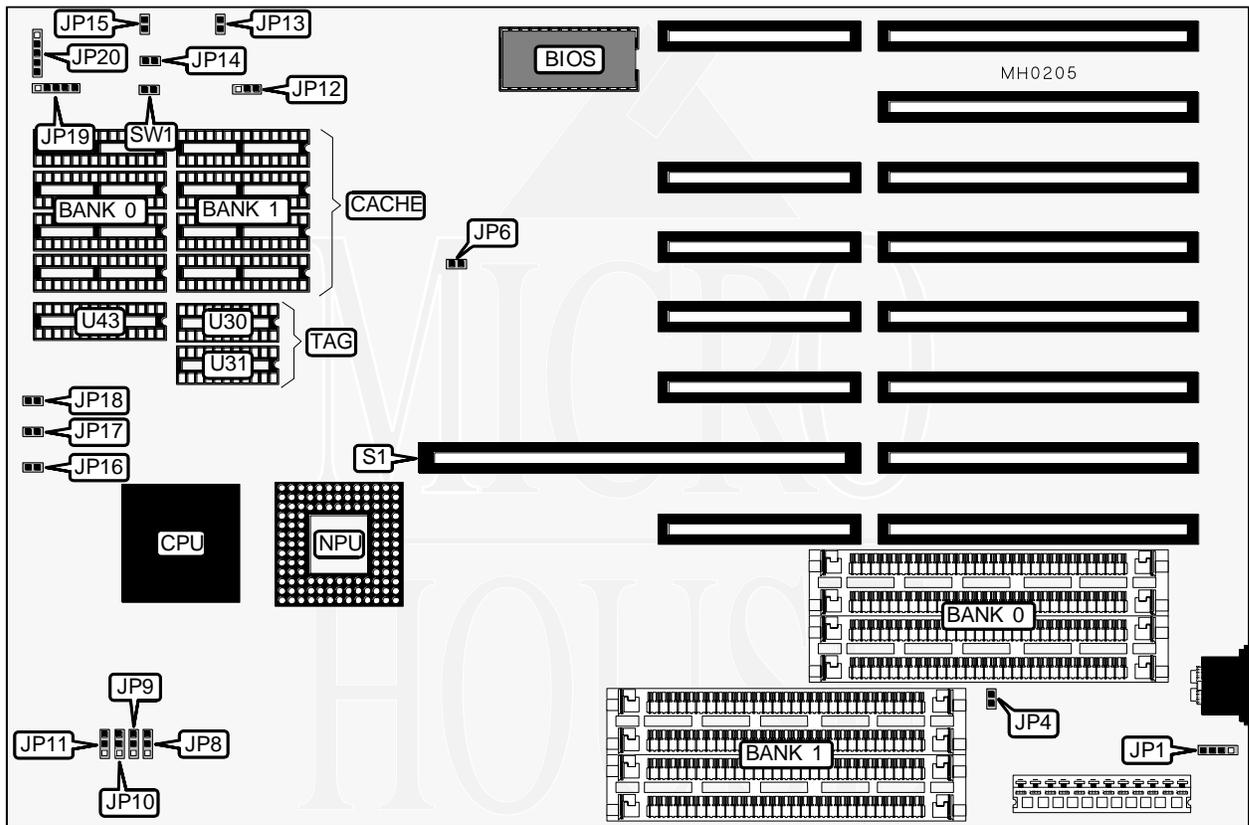

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP1	Speaker	JP20
Turbo LED	JP14	32-bit external memory card	S1
Turbo switch	JP15	Reset switch	SW1
Power LED & keylock	JP19		

Continued on next page . . .

# UNIDENTIFIED

## RST 386 CACHE SERIES

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	JP4	N/A
í Factory configured - do not alter	JP6	N/A
í Monitor type select color	JP13	Closed
Monitor type select monochrome	JP13	Open
í Factory configured - do not alter	JP16	N/A
í Factory configured - do not alter	JP17	N/A

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
4MB	(4) 1M x 9	NONE	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	NONE
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9

Note: Banks 2 & 3 are utilized when a 32-bit external memory card is installed at S1.

CACHE CONFIGURATION				
Size	Bank 0	Bank 1	TAG (U30, U31)	TAG (U43)
32KB	(4) 8K x 8	NONE	(2) 16K x 4	NONE
64KB	(4) 8K x 8	(4) 8K x 8	(2) 16K x 4	NONE
128KB	(4) 32K x 8	NONE	NONE	(1) 32K x 8

CACHE JUMPER CONFIGURATION						
Size	JP8	JP9	JP10	JP11	JP12	JP18
32KB	2 & 3	2 & 3	2 & 3	2 & 3	1 & 2	Open
64KB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	Open
128KB	1 & 2	1 & 2	1 & 2	1 & 2	2 & 3	Closed
128KB (internal)	1 & 2	1 & 2	1 & 2	1 & 2	Open	Open

Note: Pins designated should be in the closed position.