


**CHICONY, INC.
CH-101B**

Q1/93

Data bus: 16-bit, ISA
 Size: Half-length, full-height card
 Hard drives supported: Two IDE Interface (AT) drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

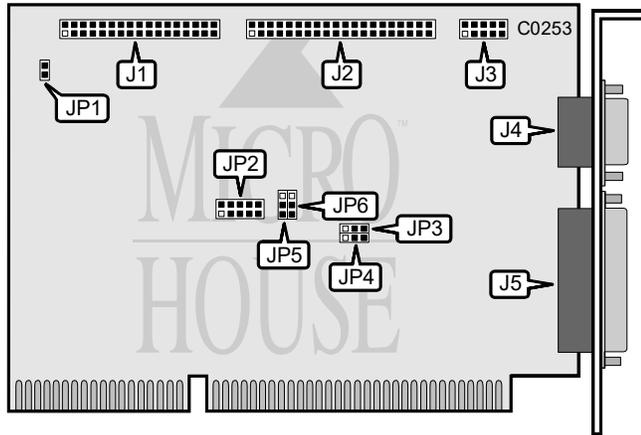

CONNECTIONS	
Function	Location
34-pin data cable connector-floppy drive	J1
40-pin IDE Interface (AT) connector-internal	J2
10-pin serial port 2 connector-internal	J3
DB-9 serial port 1 connector-external	J4
DB-25 parallel port connector-external	J5
2-pin connector-drive active LED	J6

Continued on next page . . .

CHICONY, INC.
CH-101B

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive port address is 3F0-3F7h	JP2/jumper 2	open
Floppy drive port address is 370-377h	JP2/jumper 2	closed
í Single speed floppy drive supported	JP2/jumper 3	closed
Dual speed floppy drive supported	JP2/jumper 3	open
í Parallel Port is set for LPT1	JP3	pins 1 & 2 closed
Parallel Port is set for LPT2	JP3	pins 2 & 3 closed
í Parallel Port uses IRQ7	JP4	pins 1 & 2 closed
Parallel Port uses IRQ5	JP4	pins 2 & 3 closed
Parallel Port disabled	JP3	open
í Serial Port 1 (CN4) is set for COM1	JP5	pins 1 & 2 closed
Serial Port 1 (CN4) is set for COM3	JP5	pins 2 & 3 closed
Serial Port 1 disabled	JP5	open
í Serial Port 1 (CN3) is set for COM2	JP6	pins 1 & 2 closed
Serial Port 1 (CN3) is set for COM4	JP6	pins 2 & 3 closed
Serial Port 1 disabled	JP6	open

HARD DRIVE CONFIGURATION			
Drive	JP2/jumper 1	JP2/jumper 4	JP2/Jumper 5
í Normal hard drive operation	closed	closed	closed
Supports CP-344 and WD93048-A type drives	open	closed	closed
Secondary hard drive port address enabled	closed	open	closed
Supports CP-342 and 3022 type drives	closed	closed	open
Disabled	open	open	open