


# INTERCOMP, INC. 486ISA

<b>Processor</b>	80486SX/80487SX/80486DX
<b>Processor Speed</b>	20/25/33/50MHz
<b>Chip Set</b>	Intercomp
<b>Max. Onboard DRAM</b>	32MB
<b>SRAM Cache</b>	64/256KB
<b>BIOS</b>	AMI/MR
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	4167

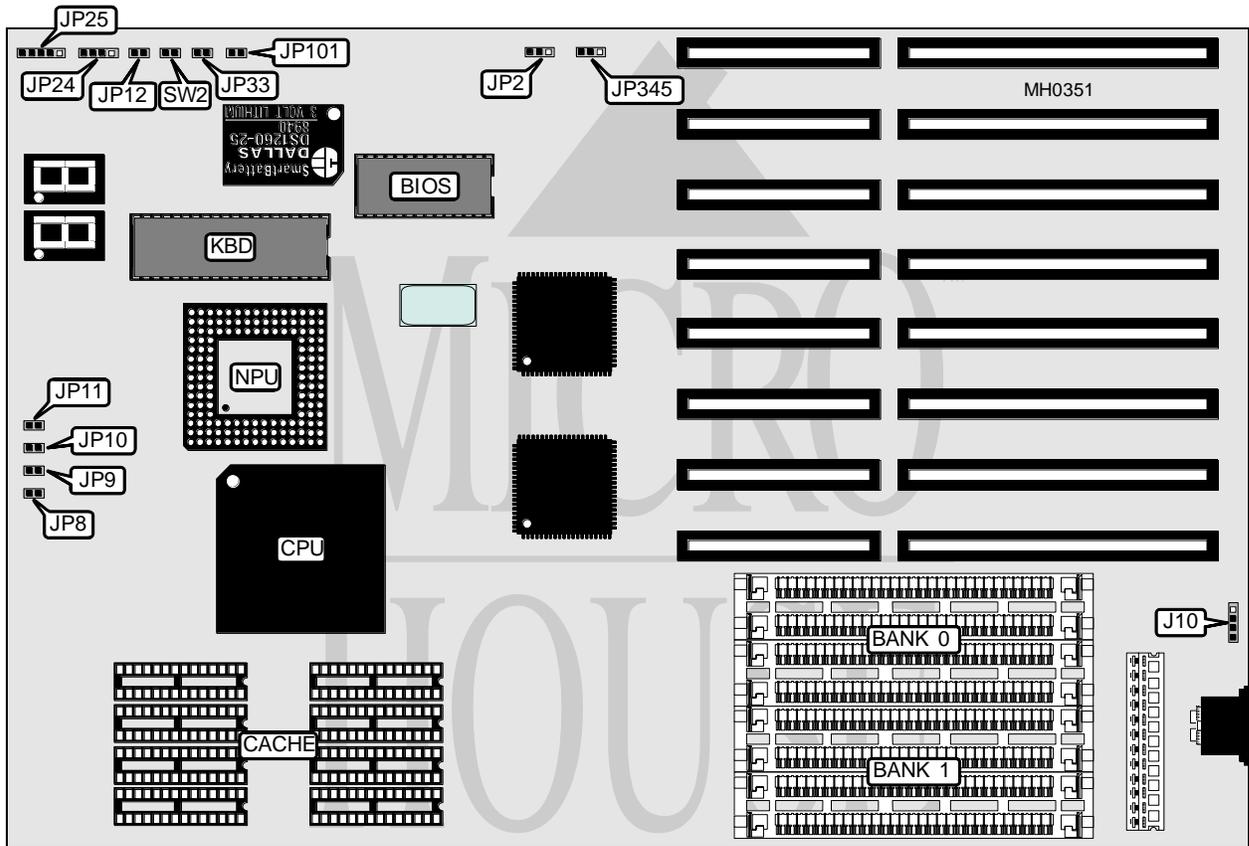

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J10	Reset switch	JP33
Turbo LED	JP12	Diagnostic LED	JP101
Speaker	JP24	Turbo switch	SW2
Power LED & keylock	JP25		

Continued on next page . . .

**INTERCOMP, INC.**  
**486ISA**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color (AMI BIOS)	JP1	Closed
Monitor type select monochrome (AMI BIOS)	JP1	Open
í Password disabled (MR BIOS)	JP1	Open
Password enabled (MR BIOS)	JP1	Closed
í CMOS memory normal operation	JP2	pins 1 & 2 closed
CMOS memory clear	JP2	pins 2 & 3 closed
í Battery select internal	JP345	pins 2 & 3 closed
Battery select external	JP345	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION	
Size	Bank 0
64KB	(8) 8K x 8
256KB	(8) 32K x 8

CACHE JUMPER CONFIGURATION				
Size	JP8	JP9	JP10	JP11
64KB	Open	Open	Open	Open
256KB	Closed	Closed	Open	Closed