


**PROCOMP USA, INC.  
S-DCB**

Q2/93

Data bus: 16-bit, ISA  
 Size: Full-length, full-height card  
 Hard drive supported: Up to seven SCSI drives  
 Floppy drives supported: 360KB, 720KB, 1.2MB, or 1.44MB (2)

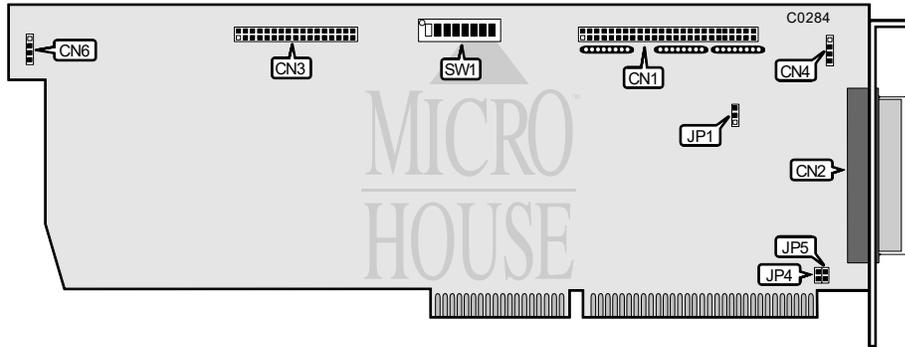

CONNECTIONS	
Purpose	Location
SCSI drive interface (50 pin) internal	CN1
SCSI drive interface (25 pin) external	CN2
Floppy drive interface	CN3
UPS/status output cable	CN4
Hard Drive activity LED	CN6

CHANNEL SELECT CONFIGURATION					
Channel	I/O Address	IRQ	SW1/switch 1	SW1/switch 2	SW1/switch 3
1	340h	IRQ11	off	off	on
2	348h	IRQ12	on	on	on
3	320h	IRQ10	off	on	on
4	328h	IRQ15	on	off	on
5	380h	IRQ10	off	on	off
6	388h	IRQ15	on	off	off
Disabled	N/A	N/A	on	on	off
Disabled	N/A	N/A	off	off	off

Continued on next page . . .

**PROCOMP USA, INC.  
S-DCB**

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Controller supplies TERMPWR to SCSI interface 26	JP1	pins 2 & 3 closed
TERMPWR not supplied to SCSI Interface 26	JP1	pins 1 & 2 closed
í UPS uses open contact to indicate "Battery Low"	JP4	open
UPS uses closed contact to indicate "Battery Low"	JP4	closed
í UPS uses open contact to indicate "On-Line"	JP5	open
UPS uses closed contact to indicate "On-Line"	JP5	closed
í Floppy drive enabled	SW1/switch 7	on
Floppy drive disabled	SW1/switch 7	off
í SCSI parity check enabled	SW1/switch 8	on
SCSI parity check disabled	SW1/switch 8	off

BIOS ADDRESS CONFIGURATION			
Address	SW1/switch 5	SW1/switch 6	SW1/switch 7
Disabled	off	off	off
DC00h	off	off	on
DA00h	off	on	off
D800h	off	on	on
CE00h	on	off	off
CC00h	on	off	on
CA00h	on	on	off
C800h	on	on	on