


ULTRASTOR CORPORATION ULTRA24F

Q1/93

Data bus: 32-bit, EISA
 Size: Full-length, half-height card
 Hard drives supported: Up to seven SCSI devices
 Floppy drives supported: Three 360KB, 720KB, 1.2MB, or 1.44MB drives

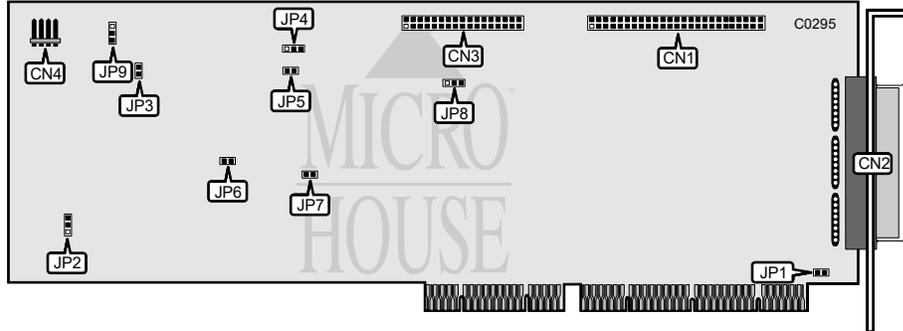

CONNECTIONS	
Function	Location
50-pin SCSI cable connector-internal	CN1
50-pin SCSI cable connector-external	CN2
34-pin data cable connector	CN3
4-pin connector-drive active LED	CN4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Chassis ground enabled	JP1	closed
Chassis ground disabled	JP1	open
Factory configured- Do not alter	JP2	pins 1 & 2 closed
Factory configured- Do not alter	JP3	closed
Factory configured- Do not alter	JP4	pins 1 & 2 closed
Factory configured- Do not alter	JP5	open
Factory configured- Do not alter	JP6	closed
Floppy drive enabled	JP7	closed
Floppy drive disabled	JP7	open
Factory configured- Do not alter	JP8	pins 1 & 2 closed
Factory configured- Do not alter	JP9	pins 2 & 3 closed

