ULTRASTOR CORPORATION
ULTRA 22F

Q4/93

Data bus: 32-bit, EISA
Size: Three/quarter-length, full-height card
Hard drive supported: Two ESDI drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

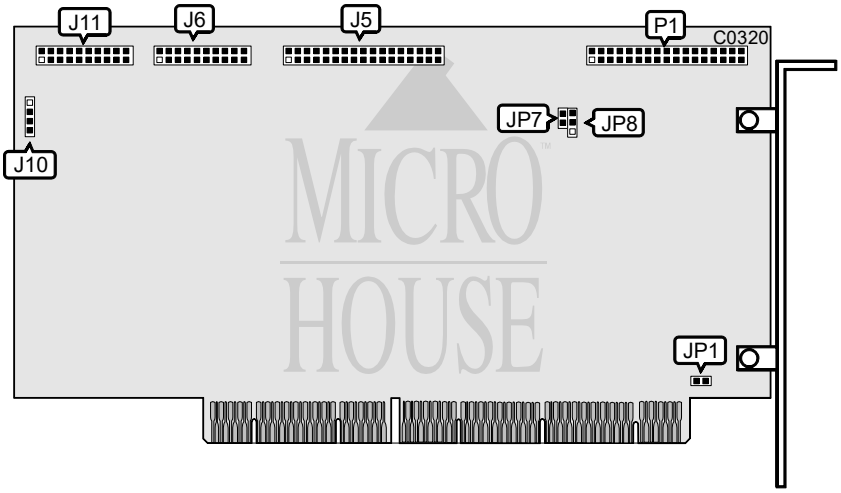

CONNECTIONS	
Function	Location
34-pin control cable connector-floppy drive	P1
34-pin control cable connector-hard drive	J5
20-pin data cable connector-drive 0	J6
4-pin connector-Drive active LED	J10
20-pin data cable connector-drive 1	J11

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive enabled	JP7	closed
Floppy drive disabled	JP7	open
í Three concurrent floppy drives supported	JP8	Pins 1-2 closed
4MB floppy drives supported	JP8	Pins 2-3 closed

MISCELLANEOUS TECHNICAL NOTES
Jumper JP1 is factory configured - do not alter.

Copyright © 1991, 1992, 1993 by Micro House Int'l (800) 926-8299. Research Dept. (303) 443-3389

Copyright © 1991, 1992, 1993 by Micro House Int'l (800) 926-8299. BBS (303) 443-9957