


# UNIDENTIFIED CORRADO 386

<b>Processor</b>	80386DX
<b>Processor Speed</b>	16/20MHz
<b>Chip Set</b>	Unknown
<b>Max. Onboard DRAM</b>	8MB
<b>Cache</b>	None
<b>BIOS</b>	AMI/Award/Phoenix
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	32-bit external memory card slot
<b>NPU Options</b>	80287/80387

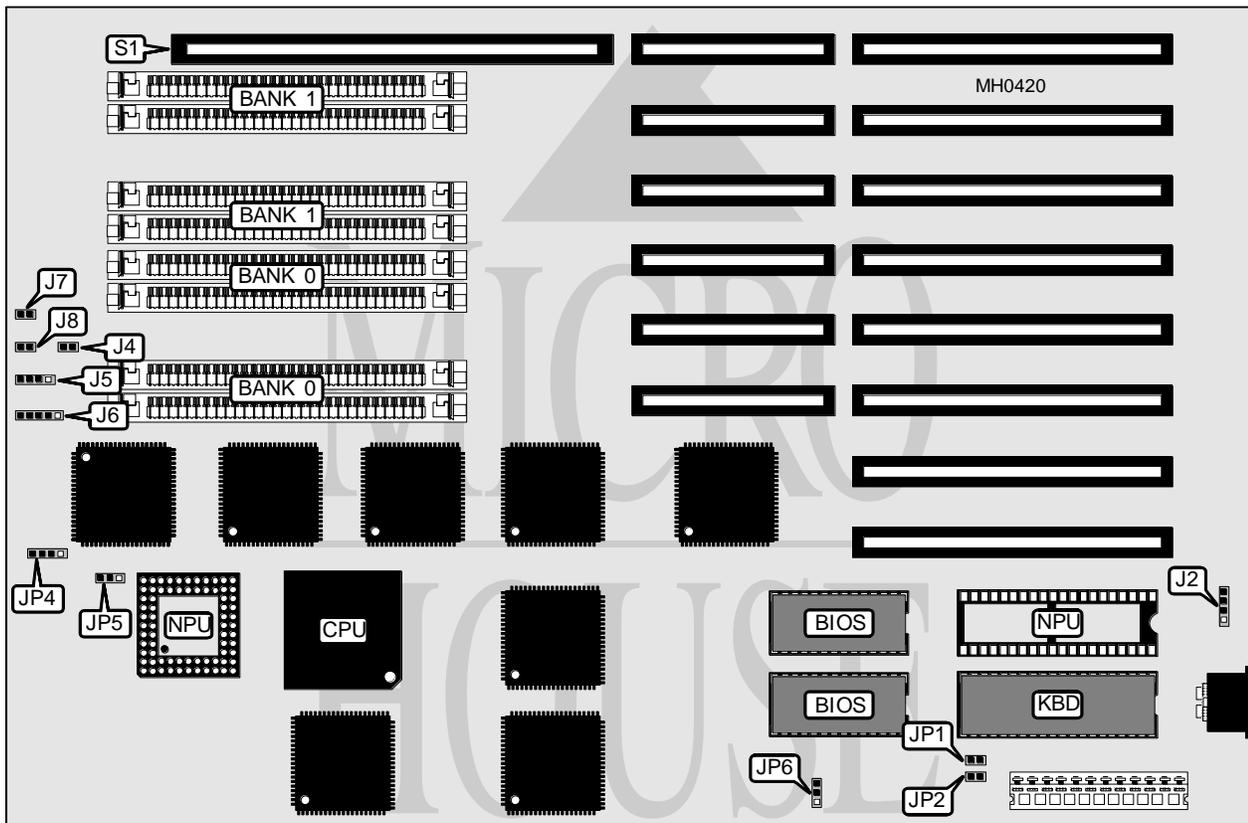

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Turbo switch	J7
Reset switch	J4	Turbo LED	J8
Speaker	J5	32-bit external memory card	S1
Power LED & keylock	J6		

Note: Locations of CPU, NPUs, chipset chips, BIOS, and keyboard BIOS are unidentified.

Continued on next page . . .

# UNIDENTIFIED

## CORRADO386

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP1	Closed
Monitor type select monochrome	JP1	Open
BIOS type select 27256	JP6	pins 1 & 2 closed
BIOS type select 27128	JP6	pins 2 & 3 closed
Note: Locations of JP4 & JP5 are unidentified.		

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
4MB	(4) 256K x 9			
4MB	(4) 1M x 9	NONE	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
16MB	(4) 1M x 9			
Note: Banks 2 & 3 are used when proprietary external memory card is installed at S1.				

NPU TYPE CONFIGURATION			
Size	JP2	JP4	JP5
80287	Closed	pins 1 & 2 closed	Open
80387 (synchronous)	Open	pins 3 & 4 closed	pins 1 & 2 closed
80387 (asynchronous)	Open	pins 3 & 4 closed	pins 2 & 3 closed
Note: The locations of JP4 & JP5 are unidentified.			