


UNIDENTIFIED GW2760WX SUPER I/O CARD

Q4/93

Data bus: 16-bit, ISA
Size: Half-length, full-height card
Hard drive supported: Two IDE(AT) Interface drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

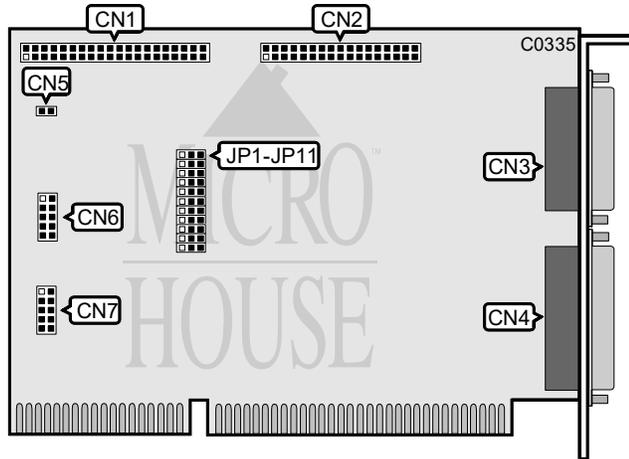

CONNECTIONS	
Function	Location
40-pin IDE(AT) Interface connector	CN1
34-pin control cable connection - floppy drive	CN2
15-pin game port - external	CN3
25-pin parallel port (LPT1/2) - external	CN4
2-pin connector - Drive Active LED	CN5
10-pin serial port 1 (COM1/3) - internal	CN6
10-pin serial port 2 (COM2/4) - internal	CN7

Continued on next page . . .

UNIDENTIFIED GW2760WX SUPER I/O CARD

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive enabled	JP1	pins 2 & 3 closed
Floppy drive disabled	JP1	pins 1 & 2 closed
í Hard drive enabled	JP2	pins 2 & 3 closed
Hard drive disabled	JP2	pins 1 & 2 closed
í Serial port 1 set to IRQ4	JP9	pins 2 & 3 closed
Serial port 1 set to IRQ3	JP9	pins 1 & 2 closed
í Serial port 2 set to IRQ3	JP10	pins 1 & 2 closed
Serial port 2 set to IRQ4	JP10	pins 2 & 3 closed
í Parallel port set to IRQ7	JP11	pins 1 & 2 closed
Parallel port set to IRQ5	JP11	pins 2 & 3 closed

SERIAL PORT 1 CONFIGURATION		
COM	Jumper JP3	Jumper JP4
Disabled	pins 1 & 2 closed	pins 1 & 2 closed
í COM1 (3F8-3FFh)	pins 2 & 3 closed	pins 1 & 2 closed
COM3 (3E8-3EFh)	pins 1 & 2 closed	pins 2 & 3 closed
COM4 (2E8-2EFh)	pins 2 & 3 closed	pins 2 & 3 closed

SERIAL PORT 2 CONFIGURATION		
COM	Jumper JP5	Jumper JP6
Disabled	pins 1 & 2 closed	pins 1 & 2 closed
í COM2 (2F8-2FFh)	pins 2 & 3 closed	pins 1 & 2 closed
COM4 (2E8-2EFh)	pins 1 & 2 closed	pins 2 & 3 closed
COM3 (3E8-3EFh)	pins 2 & 3 closed	pins 2 & 3 closed

PARALLEL PORT CONFIGURATION		
LPT	Jumper JP7	Jumper JP8
Disabled	pins 1 & 2 closed	pins 1 & 2 closed
LPT3 (278-27Fh)	pins 2 & 3 closed	pins 1 & 2 closed
í LPT2 (378-37Fh)	pins 1 & 2 closed	pins 2 & 3 closed
LPT1 (3BC-3BFh)	pins 2 & 3 closed	pins 2 & 3 closed