


# UNIDENTIFIED PM-550C

Q4/93

Data bus: 16-bit, ISA  
 Size: Half-length, full-height card  
 Hard drives supported: Two IDE(AT) Interface drives  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

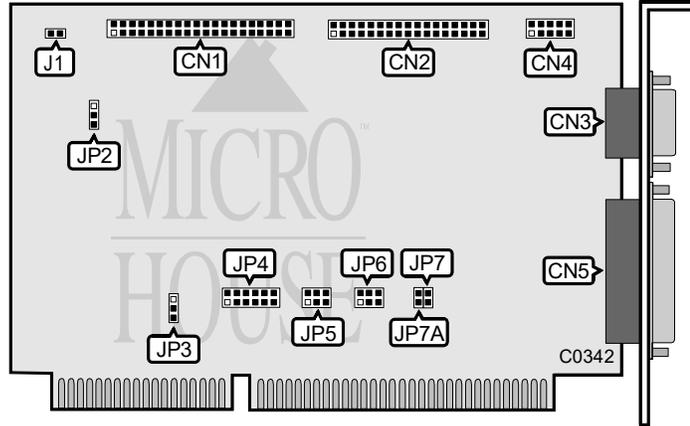

CONNECTIONS	
Function	Location
2-pin connector - Drive Active LED	J1
40-pin IDE(AT) Interface connector	CN1
34-pin control cable connector - floppy drive	CN2
9-pin serial port 1 (COM1) - external	CN3
9-pin serial port 2 (COM2) - internal	CN4
25-pin parallel port - external	CN5

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
f Floppy drive enabled	JP2	pins 2 & 3 closed
Floppy drive disabled	JP2	pins 1 & 2 closed
f Hard drive enabled	JP3	pins 2 & 3 closed
Hard drive disabled	JP3	pins 1 & 2 closed

Continued on next page . . .

**UNIDENTIFIED  
PM-550C**

... continued from previous page

SERIAL PORT 1 CONFIGURATION		
Select	JP4/jumper 1	JP4/jumper 3
Disabled	open	open
í COM1 (3F8-3FFh)	closed	open
COM3 (3E8-3EFh)	open	closed
COM4 (2E8-2EFh)	closed	closed

SERIAL PORT 2 CONFIGURATION		
Select	JP4/jumper 2	JP4/jumper 4
Disabled	open	open
í COM2 (2F8-2FFh)	closed	open
COM4 (2E8-2EFh)	open	closed
COM3 (3E8-3EFh)	closed	closed

PARALLEL PORT CONFIGURATION		
Select	JP4/jumper 5	JP4/jumper 6
Disabled	open	open
í LPT1 (278-27Fh)	closed	open
LPT2 (378-37Fh)	open	closed

SERIAL PORT 1 INTERRUPT REQUEST			
Select	JP5/jumper 1	JP5/jumper 2	JP5/jumper 3
í IRQ4	closed	open	open
IRQ5	open	closed	open
IRQ9	open	open	closed

SERIAL PORT 2 INTERRUPT REQUEST			
Select	JP6/jumper 1	JP6/jumper 2	JP6/jumper 3
í IRQ3	closed	open	open
IRQ9	open	closed	open
IRQ5	open	open	closed

PARALLEL PORT INTERRUPT REQUEST		
Select	JP7	JP7A
Disabled	open	open
IRQ5	closed	open
í IRQ7	open	closed