


UNIDENTIFIED ZERO WAIT 286 TURBO

Processor	80286
Processor Speed	12MHz
Chip Set	Unidentified
Max. Onboard DRAM	4MB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80287

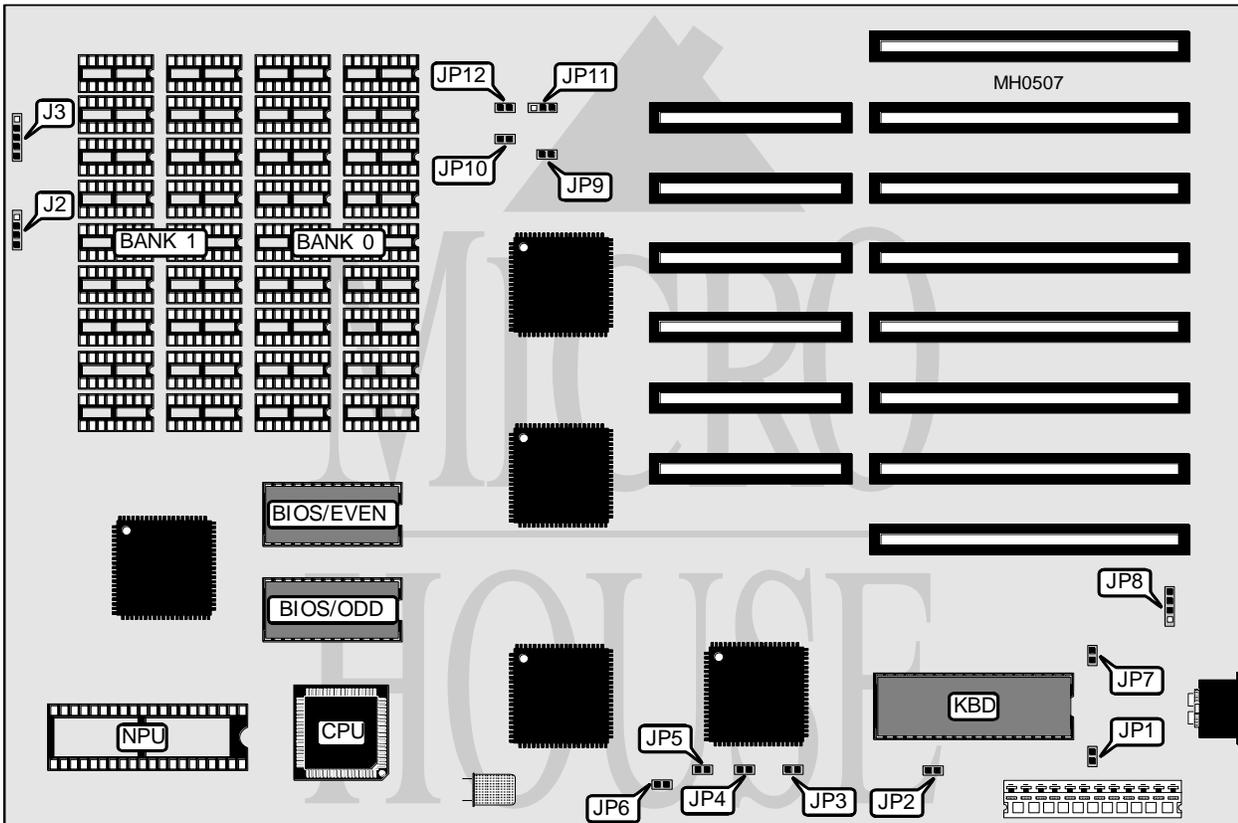

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J2	External battery	JP8
Power LED & keylock	J3	Turbo switch	JP10
Zero wait state LED	JP6	Turbo LED	JP12
Reset switch	JP7		

Continued on next page . . .

UNIDENTIFIED

ZERO WAIT 286 TURBO

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP1	Closed
Monitor type select monochrome	JP1	Open
í Wait state select 1	JP2	Open
Wait states select 0	JP2	Closed
í BIOS type select 27128	JP9	Open
BIOS type select 27256	JP9	Closed
í Factory configured - do not alter	JP11	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(18) 41256	NONE
640KB	(18) 41256	(18) 4164
1MB	(18) 41256	(18) 41256
2MB	(18) 411000	NONE
4MB	(18) 411000	(18) 411000

DRAM JUMPER CONFIGURATION			
Size	JP3	JP4	JP5
512KB	Closed	Closed	Open
640KB	Open	Open	Closed
1MB	Closed	Open	Closed
2MB	Open	Closed	Closed
4MB	Closed	Closed	Closed