


# UNIDENTIFIED TURBO - 286

<b>Processor</b>	80286
<b>Processor Speed</b>	16MHz
<b>Chip Set</b>	None
<b>Max. Onboard DRAM</b>	1MB
<b>Cache</b>	None
<b>BIOS</b>	Phoenix
<b>Dimensions</b>	355mm x 304mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80287

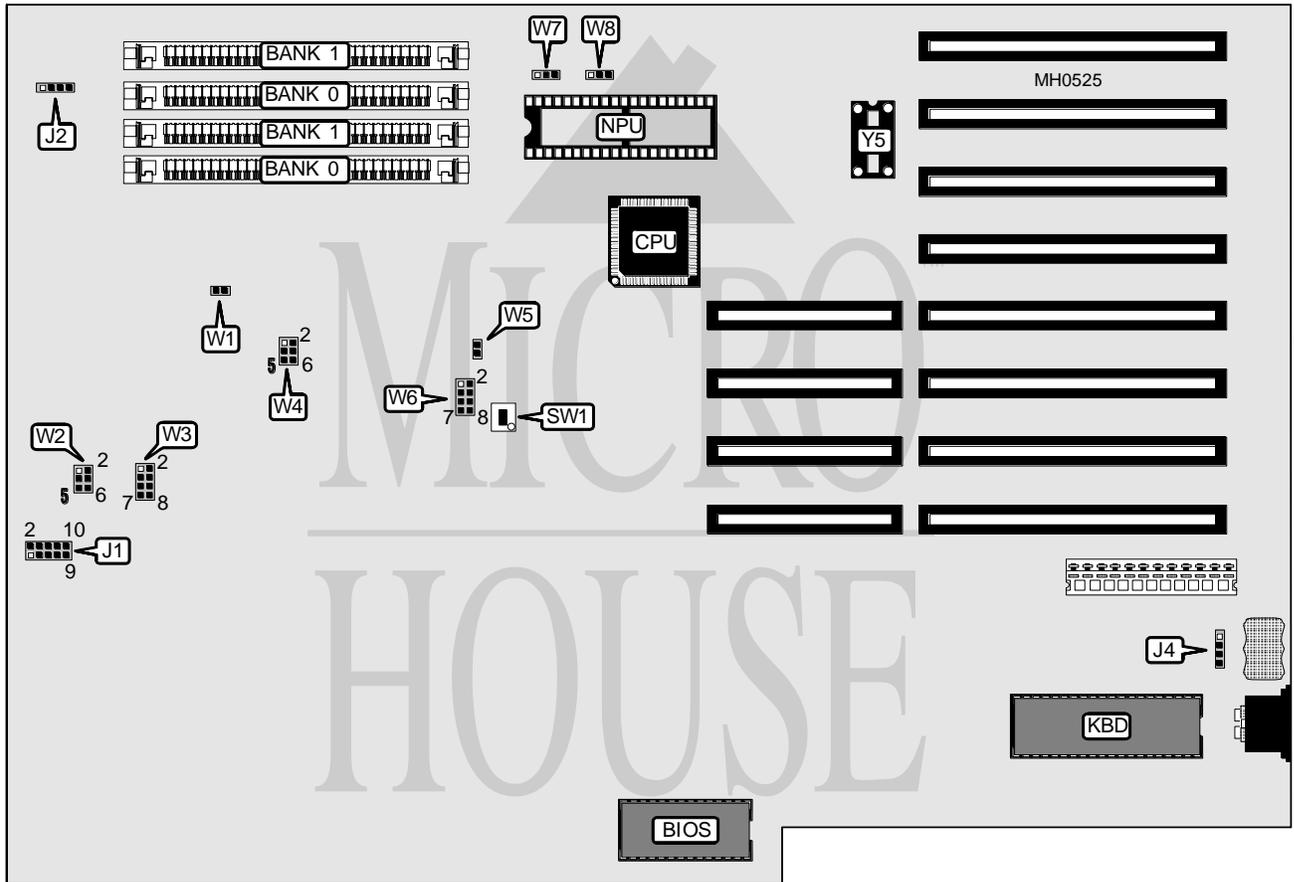

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo switch	E1	External battery	J21
Speaker	J19	Reset switch	SW
Power LED & keylock	J20		

Continued on next page . . .

# UNIDENTIFIED

## TURBO - 286

... continued from previous page

### USER CONFIGURABLE SETTINGS

Function	Jumper	Position
í Monitor type select color	SW1	Closed
Monitor type select monochrome	SW1	Open

### DRAM CONFIGURATION

Size	Bank 0	Bank 1
512KB	(2) 256K x 9	NONE
640KB	(2) 256K x 9	(2) 64K x 9
1MB	(2) 256K x 9	(2) 256K x 9

### DRAM JUMPER CONFIGURATION

Size	E4
512KB	Closed
640KB	Open
1MB	Open