


UNIDENTIFIED PM-520

Q4/94

Data bus: 16-bit, ISA
 Size: Half-length, full-height card
 Hard drive supported: Two IDE (AT) interface drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

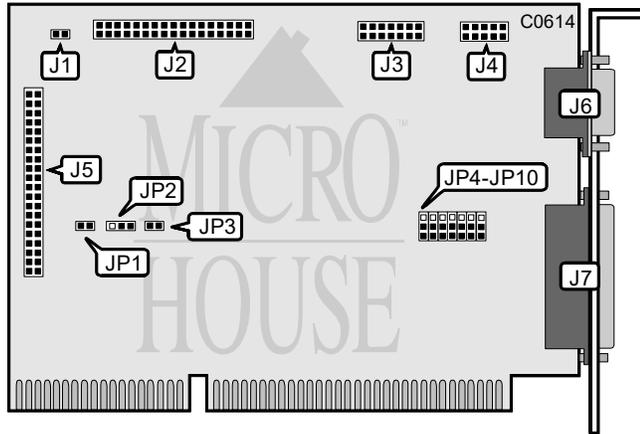

CONNECTIONS	
Function	Location
2-pin connector - drive active LED	J1
34-pin control cable connector - floppy drive	J2
Game port	J3
10-pin serial port 2 - internal	J4
40-pin IDE (AT) Interface connector	J5
9-pin serial port 1 - external	J6
25-pin parallel port	J7

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i Embedded hard drive control enabled	JP1 & JP3	Closed
Embedded hard drive control disabled	JP1 & JP3	Open
i Factory configured - do not alter	JP2	Pins 2 & 3 closed
i Floppy drive enabled	JP9	Pins 2 & 3 closed
Floppy drive disabled	JP9	Pins 1 & 2 closed
i Factory configured - do not alter	JP10	Pins 2 & 3 closed

Continued on next page . . .

UNIDENTIFIED PM-520

... continued from previous page

PARALLEL PORT CONFIGURATION		
LPT/Address	JP4	JP5
í LPT2/378h	Pins 2 & 3 closed	Pins 2 & 3 closed
LPT1/3BCh	Pins 1 & 2 closed	Pins 2 & 3 closed
LPT3/278h	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	Pins 1 & 2 closed	Pins 1 & 2 closed

SERIAL PORT 1 CONFIGURATION		
COM	JP6	JP8
í COM1	Pins 2 & 3 closed	Pins 2 & 3 closed
COM2	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	Pins 1 & 2 closed	N/A

SERIAL PORT 2 CONFIGURATION		
COM	JP7	JP8
í COM2	Pins 2 & 3 closed	Pins 2 & 3 closed
COM1	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	Pins 1 & 2 closed	N/A