


# EVEREX SYSTEMS, INC.

## TEMPO 386/20,25 (EV-1869)

<b>Processor</b>	80386DX
<b>Processor Speed</b>	20/25MHz
<b>Chip Set</b>	Everex
<b>Max. Onboard DRAM</b>	8MB
<b>Cache</b>	None
<b>BIOS</b>	Everex
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	32-bit external memory card slot
<b>NPU Options</b>	80387/3167

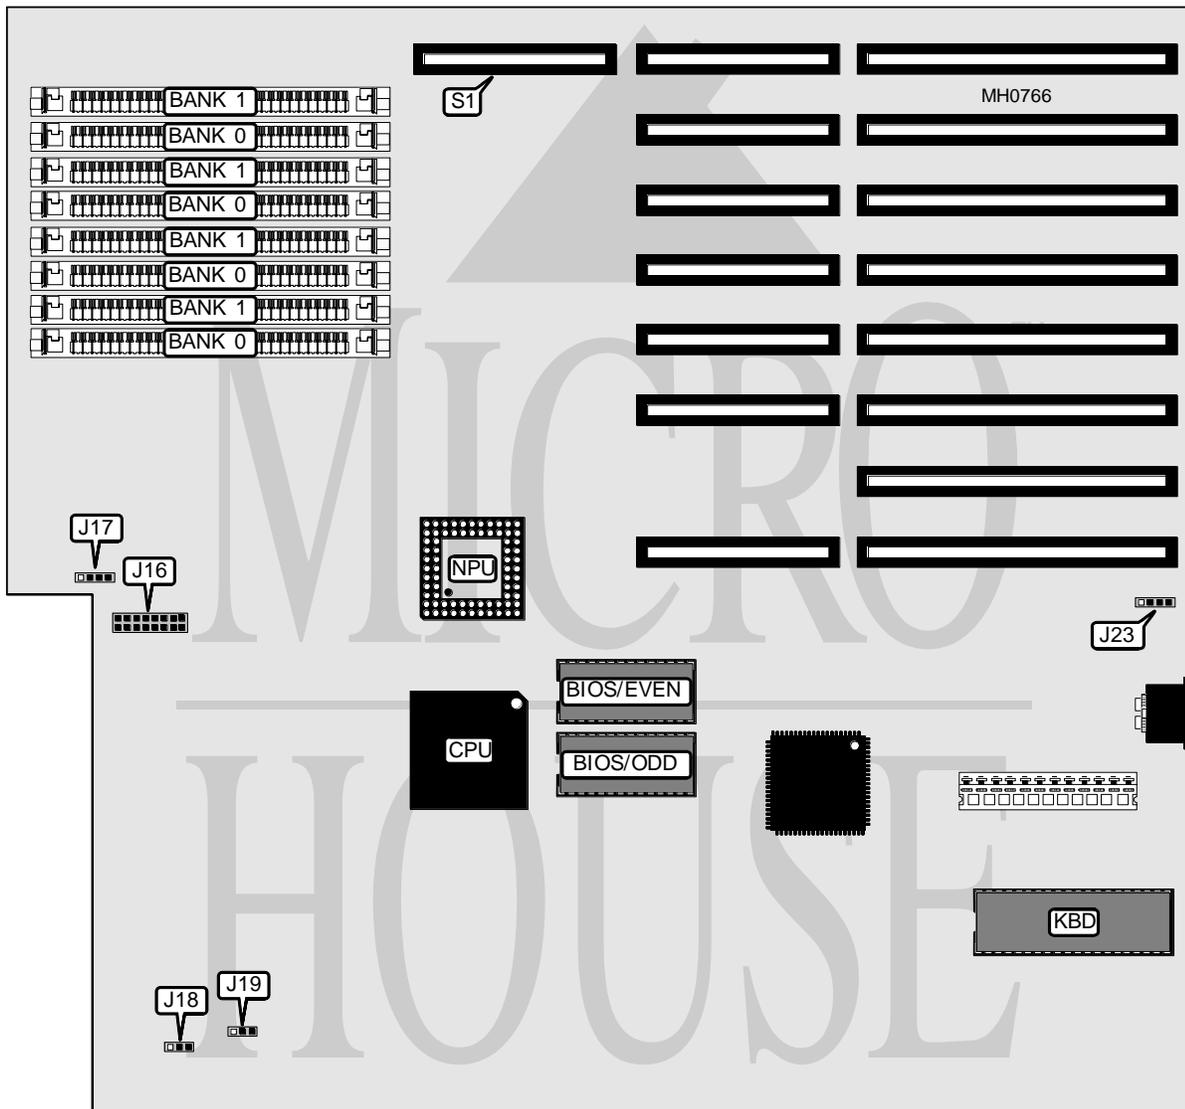

CONNECTIONS			
Purpose	Location	Purpose	Location
Front panel LED	J16	External battery	J23
Speaker	J17	32-bit external memory card	S1



**EVEREX SYSTEMS, INC.**  
**TEMPO 386/20,25 (EV-1869)**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í DRAM wait states select 0	J18	pins 2 & 3 closed
DRAM wait state select 1	J18	pins 1 & 2 closed
í NPU wait states select 0	J19	pins 2 & 3 closed
NPU wait states select 1	J19	pins 1 & 2 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
3MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	NONE
4MB	(4) 256K x 9			
4MB	(4) 1M x 9	NONE	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	NONE
16MB	(4) 1M x 9			

Note: Banks 2 and 3 are used when a 32-bit external memory card is installed at S1.