


ALWAYS TECHNOLOGY AL-1950A

Q1/95

Data bus: 16-bit, ISA
 Size: Half-length, full-height card
 Hard drive supported: Two IDE (AT) interface drives or up to seven SCSI devices
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

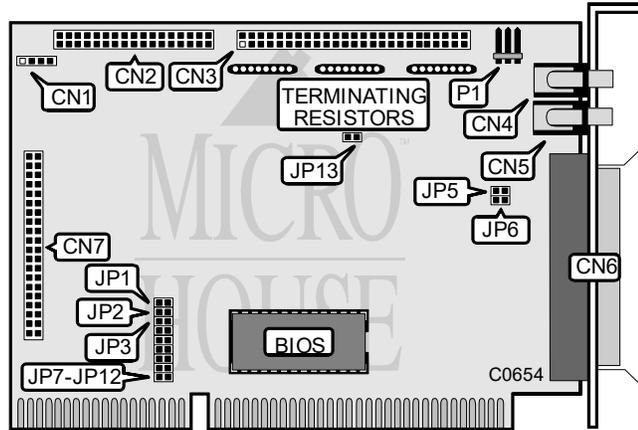

CONNECTIONS	
Function	Location
4-pin connector - drive active LED	CN1
34-pin control cable connector - floppy drive	CN2
50-pin SCSI connector - internal	CN3
CD-ROM audio output - channel 1	CN4
CD-ROM audio output - channel 2	CN5
50-pin SCSI connector - external	CN6
40-pin IDE (AT) Interface connector	CN7

USER CONFIGURABLE SETTINGS			
Function	Location	Setting	
f Zero Wait State disabled	JP7	Open	
Zero Wait State enabled	JP7	Closed	
f Factory configured - do not alter	P1	N/A	

IDE/FLOPPY PORTS			
Setting	JP1	JP2	JP3
f Enabled	Open	Closed	Closed
Disabled	Closed	Open	Open

Continued on next page . . .

ALWAYS TECHNOLOGY
AL-1950A

... continued from previous page

BIOS ADDRESS		
Address	JP5	JP6
CA00h	Open	Open
C800h	Closed	Open
CE00h	Open	Closed
DE00h	Closed	Closed

INTERRUPT SELECT					
IRQ	JP8	JP9	JP10	JP11	JP12
IRQ10	Open	Open	Closed	Open	Open
IRQ7	Closed	Open	Open	Open	Open
IRQ9	Open	Closed	Open	Open	Open
IRQ11	Open	Open	Open	Closed	Open
IRQ12	Open	Open	Open	Open	Closed