


CAF TECHNOLOGY, INC.

C 3 2 5 - 4

Processor	80386DX
Processor Speed	33/40MHz
Chip Set	ETEQ
Max. Onboard DRAM	32MB
Cache	64KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387/3167

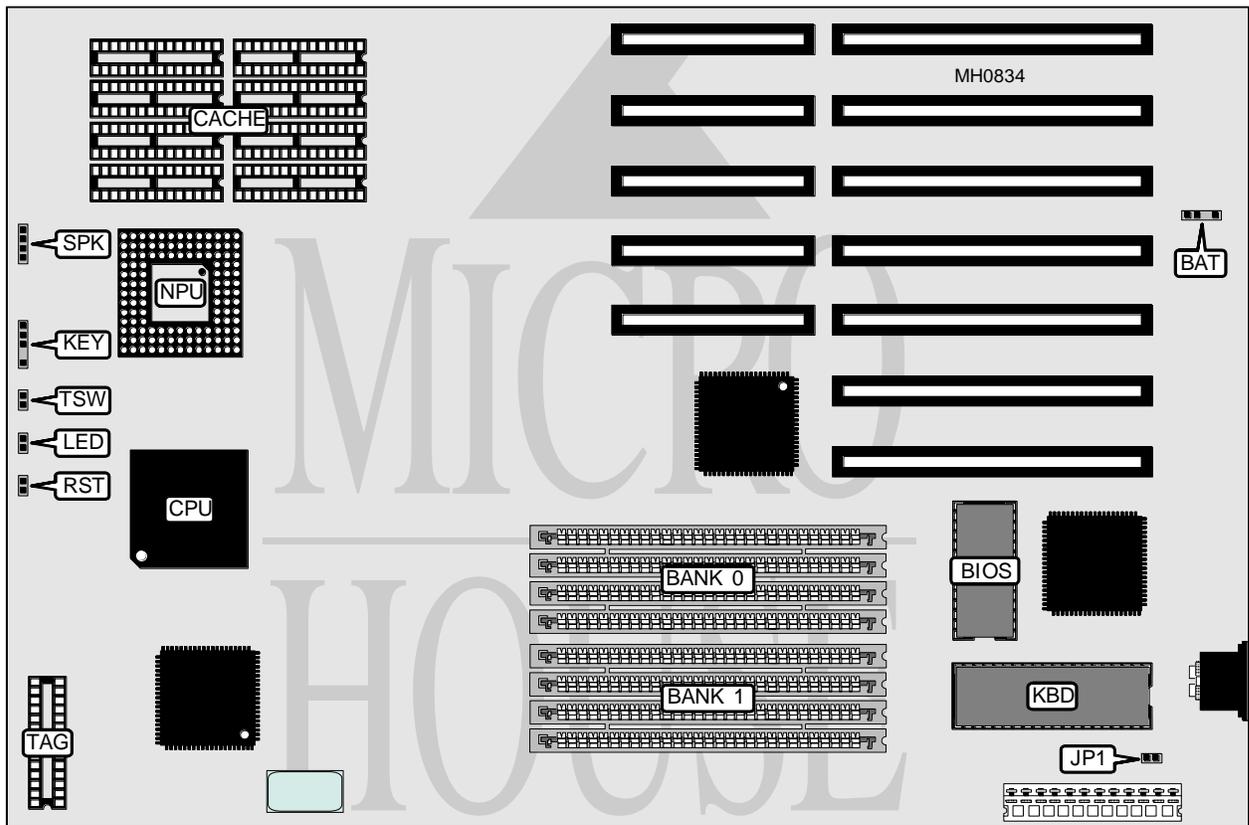

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	BAT	Reset switch	RST
Power LED & keylock	KEY	Speaker	SPK
Turbo LED	LED	Turbo switch	TSW

Continued on next page . . .

CAF TECHNOLOGY, INC.

C 3 2 5 - 4

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CPU speed switchable from keyboard	JP1	Closed
CPU speed switchable from turbo switch	JP1	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION		
Size	Bank 0	TAG
64KB	(8) 8K x 8	(1) 8K x 8