


UNIDENTIFIED
 PM-510-C
 strangest4

Q1/95

Data bus: 16-bit, ISA
 Size: Half-length, half-height card
 Hard drive supported: Two IDE (AT) interface drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

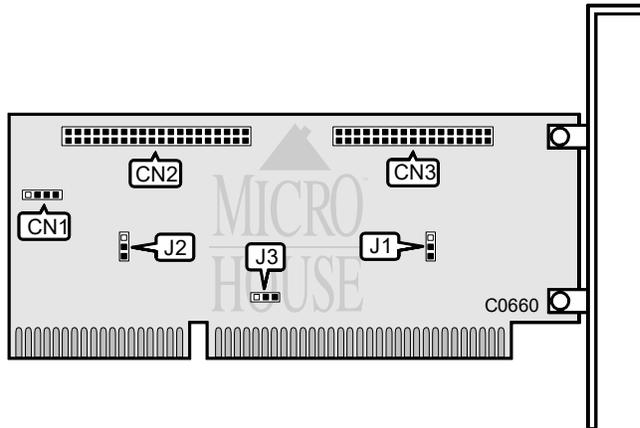

| CONNECTIONS | |
|---|----------|
| Function | Location |
| 4-pin connector - drive active LED | CN1 |
| 40-pin IDE (AT) Interface connector | CN2 |
| 34-pin control cable connector - floppy drive | CN3 |

| USER CONFIGURABLE SETTINGS | | |
|-----------------------------------|----------|-------------------|
| Function | Location | Setting |
| f Floppy drive enabled | J1 | Pins 1 & 2 closed |
| Floppy drive disabled | J1 | Pins 2 & 3 closed |
| f HDD enabled | J2 | Pins 1 & 2 closed |
| HDD disabled | J2 | Pins 2 & 3 closed |
| f Standard I/O check ready signal | J3 | Pins 1 & 2 closed |
| Delayed I/O check ready signal | J3 | Pins 2 & 3 closed |