


# AST RESEARCH, INC.

## BRAVO 486/25

<b>Processor</b>	80486DX
<b>Processor Speed</b>	25MHz
<b>Chip Set</b>	AST
<b>Max. Onboard DRAM</b>	16MB
<b>Cache</b>	None
<b>BIOS</b>	AST
<b>Dimensions</b>	355mm x 251mm
<b>I/O Options</b>	Bus mouse port, floppy interface, IDE interface, parallel port, serial ports (2), VGA port
<b>NPU Options</b>	80387SX

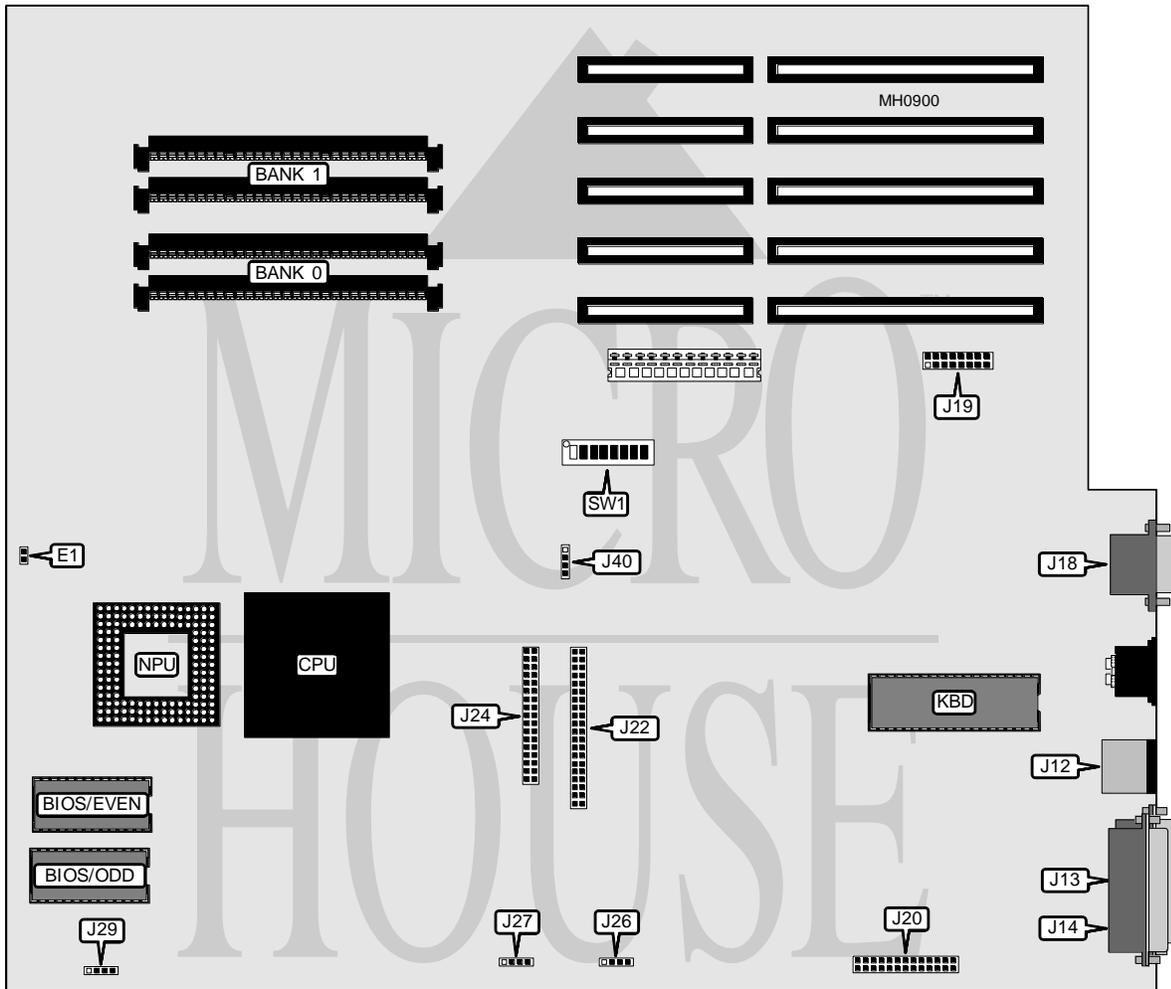

CONNECTIONS			
Purpose	Location	Purpose	Location
Bus mouse port	J12	IDE interface	J22
Parallel port	J13	Floppy drive interface	J24
Primary serial port	J14	External battery	J26
VGA port	J18	Speaker	J27
VGA pass-through	J19	Front panel switch/display	J29
Secondary serial port header	J20	External HD card access LED	J40

*Continued on next page . . .*

AST RESEARCH, INC.  
BRAVO 486/25

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Parity check enabled	E1	Closed
Parity check disabled	E1	Open
í VGA interface enabled	SW1/1	On
VGA interface disabled	SW1/1	Off
í Password check normal operation	SW1/2	Off
Password clear	SW1/2	On
í Factory configured - do not alter	SW1/3	Off
í Factory configured - do not alter	SW1/4	Off
í Factory configured - do not alter	SW1/5	On
í Factory configured - do not alter	SW1/6	On
í PS/2 mode enabled (AT mode disabled)	SW1/7	On
PS/2 mode disabled (AT mode enabled)	SW1/7	Off
í Monitor type select fixed frequency	SW1/8	Off
Monitor type select multi frequency	SW1/8	On

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(4) 4M x 9	NONE
10MB	(2) 1M x 9	(4) 4M x 9
10MB	(4) 4M x 9	(2) 1M x 9
16MB	(4) 4M x 9	(4) 4M x 9