


# UNIDENTIFIED PM-510D REV. 2

Q1/95

Data bus: 16-bit, ISA  
 Size: Half-length, half-height card  
 Hard drive supported: Two IDE (AT) interface drives  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

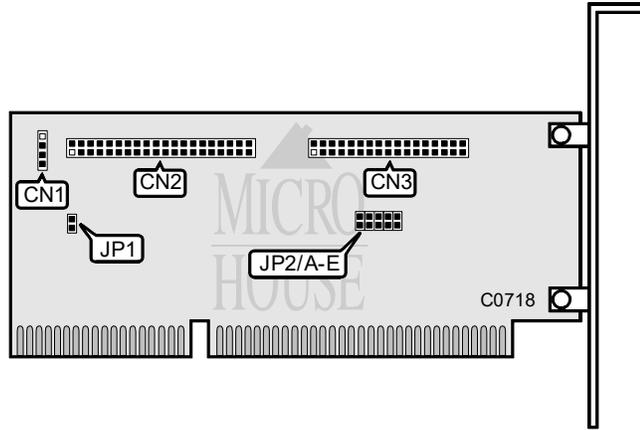

CONNECTIONS		
Function	Location	
4-pin connector - drive active LED	CN1	
40-pin IDE (AT) Interface connector	CN2	
34-pin control cable connector - floppy drive	CN3	

USER CONFIGURABLE SETTINGS			
Function	Location	Setting	
i HDD enabled	JP1	closed	
	JP1	open	
i Floppy drive enabled	JP2/jumpers A-E	closed	
	JP2/jumpers A-E	open	