


RELIALOGIC CORPORATION PRIVATE, LTD. XL505

Q2/95

Data bus: 32-bit, VL-Bus
 Size: Three quarter-length, half-height card
 Hard drive supported: Two IDE (AT) interface drives
 Floppy drives supported: 360KB, 720KB, 1.2MB, or 1.44MB drives

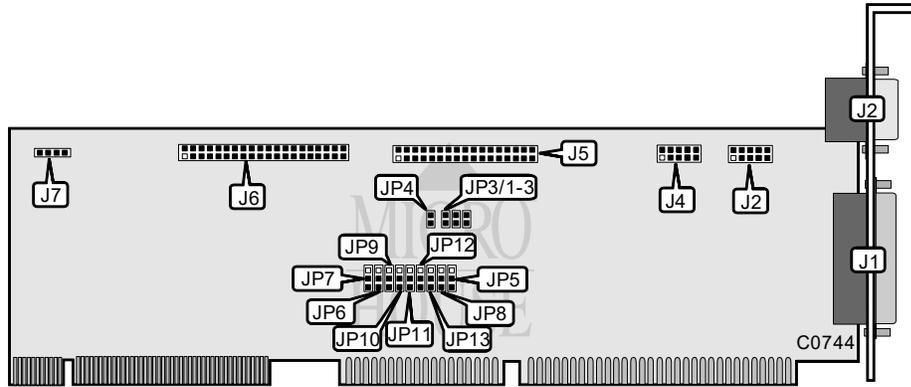

CONNECTIONS	
Function	Location
25-pin parallel port	J1
9-pin serial port 1 (external)/10-pin serial port (internal)	J2
10-pin serial port 2 - internal	J4
34-pin connector - floppy drive	J5
40-pin IDE(AT) interface	J6
4-pin drive active LED	J7

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Factory configured - do no alter	JP4	open
í IDE interface enabled	JP6	pins 1 & 2 closed
í IDE interface disabled	JP6	pins 2 & 3 closed
í Floppy drive interface enabled	JP7	pins 1 & 2 closed
í Floppy drive interface disabled	JP7	pins 2 & 3 closed

Continued on next page. . .

RELIALOGIC CORPORATION PRIVATE, LTD.
XL505

...continued from previous page

BASE ADDRESS SELECTION			
Address	JP3/1	JP3/2	JP3/3
í C800-CBFFh	closed	closed	closed
CC00-CFFFh	open	closed	closed
D000-D3FFh	closed	open	closed
D400-D7FFh	open	open	closed
D800-DBFFh	closed	closed	open
DC00-DFFFh	open	closed	open
Disabled	open	open	closed
Disabled	open	open	open

PARALLEL PORT CONFIGURATION		
LPT	JP12	JP13
LPT2	pins : & 3 closed	pins : & 2 closed
LPT1	pins : & 2 closed	pins : & 3 closed
LPT3	pins : & 2 closed	pins : & 2 closed
Disabled	pins : & 3 closed	pins : & 3 closed

SERIAL PORT 1 & 2 CONFIGURATION				
COM (Serial Port 1)	COM (Serial Port 2)	JP9	JP10	JP11
í COM1	COM2	pins 1 & 2	pins 1 & 2	pins 2 & 3
COM2	COM1	pins 1 & 2	pins 1 & 2	pins 1 & 2
COM3	COM4	pins 2 & 3	pins 2 & 3	pins 1 & 2
COM1	Disabled	pins 1 & 2	pins 2 & 3	pins 2 & 3
COM2	Disabled	pins 2 & 3	pins 1 & 2	pins 1 & 2
Disabled	COM1	pins 1 & 2	pins 2 & 3	pins 1 & 2
Disabled	COM2	pins 2 & 3	pins 1 & 2	pins 2 & 3
Disabled	Disabled	pins 2 & 3	pins 2 & 3	pins 2 & 3

Note: Designated pins are in the closed position.

SERIAL PORT 1 & 2 INTERRUPT SELECTION			
IRQ (Serial Port 1)	IRQ (Serial Port 2)	JP5	JP8
í 4	3	pins 1 & 2	pins 2 & 3
3	4	pins 2 & 3	pins 1 & 2

Note: Designated pins are in the closed position.

MISCELLANEOUS TECHNICAL NOTES
IRQ 7 for the parallel port is factory configured and cannot be altered.