


UNIDENTIFIED KT-IDE PLUS-V1(VER. 2)

Q2/95

Data bus: 16-bit, ISA
Size: Half-length, full-height card
Hard drive supported: Two IDE(AT) Interface drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

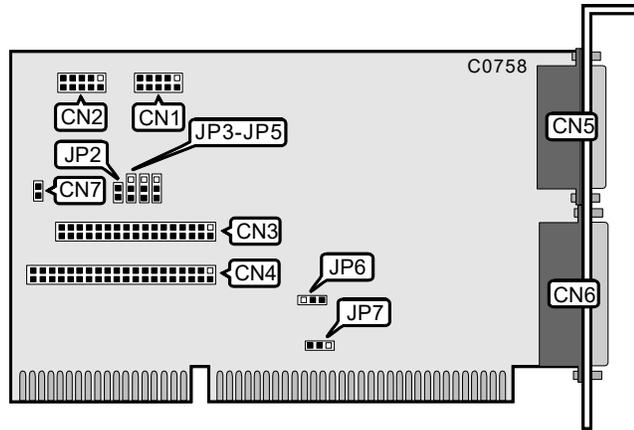

CONNECTIONS	
Function	Location
10-pin serial port 1 - internal	CN1
10-pin serial port 2 - internal	CN2
34-pin control cable connection - floppy drive	CN3
40-pin IDE(AT) Interface connector	CN4
Game port	CN5
Parallel port	CN6
2-pin connector - drive active LED	CN7

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
<input type="checkbox"/> Game port enabled	JP2	closed
<input type="checkbox"/> Game port disabled	JP2	open
<input type="checkbox"/> Factory configured - do not alter	JP6	pins 1 & 2 closed
<input type="checkbox"/> Parallel port IRQ7 selected	JP7	pins 2 & 3 closed
<input type="checkbox"/> Parallel port IRQ5 selected	JP7	pins 1 & 2 closed

Continued on next page . . .

UNIDENTIFIED
KT-IDE PLUS-V1(VER. 2)

. . . continued from previous page

PARALLEL PORT CONFIGURATION	
LPT/Address	JP3
í LPT1/378h	pins 2 & 3 closed
LPT2/278h	pins 1 & 2 closed
Disabled	all pins open

SERIAL PORT 1 CONFIGURATION	
COM/Address	JP5
í COM1/3F8h	pins 2 & 3 closed
COM3/3E8h	pins 1 & 2 closed
Disabled	all pins open

SERIAL PORT 2 CONFIGURATION	
COM/Address	JP4
í COM2/2F8h	pins 2 & 3 closed
COM4/2E8h	pins 1 & 2 closed
Disabled	all pins open