


MITSUBISHI ELECTRONICS

MP 3200

Processor	80386SX
Processor Speed	16MHz
Chip Set	Mitsubishi
Max. onboard DRAM	1MB (location unknown)
SRAM Cache	32KB
BIOS	Mitsubishi/Phoenix
Dimensions	330mm x 218mm
I/O Options	16-bit external memory card, 16-bit proprietary local bus slots (2) floppy drive interface, parallel port, serial ports (2)
NPU Options	80287/80387SX

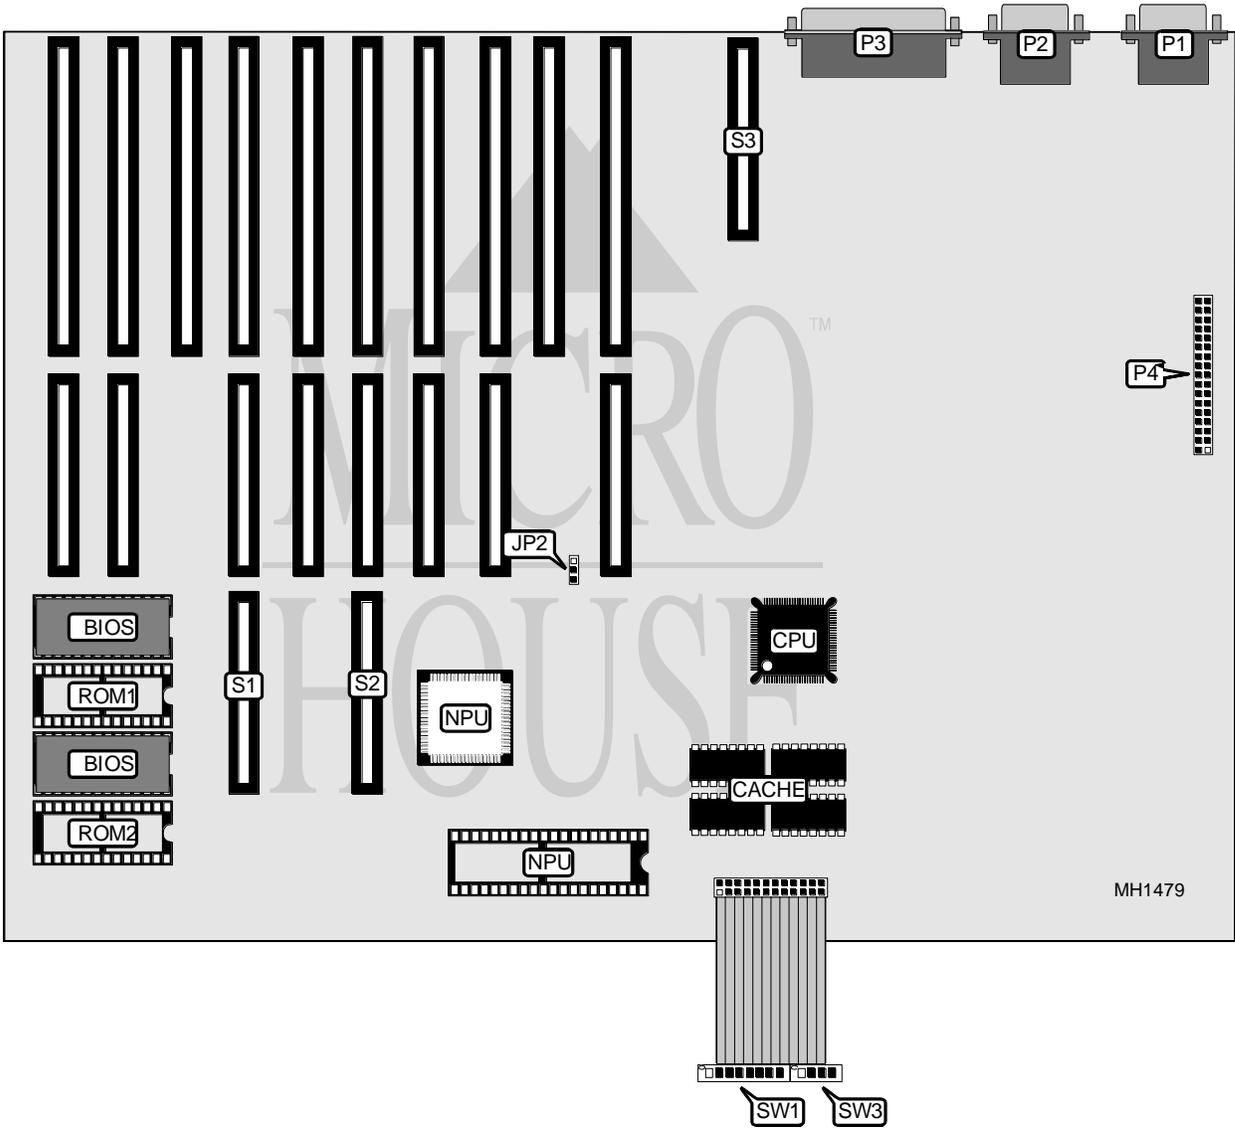

Continued on next page . . .

MITSUBISHI ELECTRONICS

MP 3200

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port (COM1)	P1	Option ROM	ROM1
Serial port (COM2)	P2	Option ROM	ROM2
Parallel port	P3	16-bit proprietary local bus slots	S1 & S2
Floppy drive interface	P4	16-bit external memory card	S3

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Floppy drive interface enabled	JP2	pins 1 & 2 closed
Floppy drive interface disabled	JP2	pins 2 & 3 closed
í Factory configured - do not alter	SW1/switch 1	On
í Factory configured - do not alter	SW1/switch 2	Off
í Factory configured - do not alter	SW1/switch 4	Off
í Factory configured - do not alter	SW1/switch 6	Off
í Monitor type select color	SW1/switch 8	On
Monitor type select monochrome	SW1/switch 8	Off
í Cache enabled	SW2/switch 1	On
Cache disabled	SW2/switch 1	Off
í Factory configured - do not alter	SW2/switch 2	Off
í NPU enabled	SW2/switch 3	On
NPU disabled	SW2/switch 3	Off
í External memory select 1MB	SW2/switch 4	Off
External memory select 2MB	SW2/switch 4	On

MEMORY MODE CONFIGURATION			
Mode	Size	SW1/switch 3	SW1/switch 5
A	512KB (base)	Off	On
í C	640KB (base)	Off	Off
D	512KB (external)	On	Off

SERIAL PORT CONFIGURATION			
Serial Port 1 (P1)	Serial Port 2 (P2)	SW2/switch 5	SW2/Switch 6
í COM1	COM2	Off	Off
COM1	Disabled	Off	On
Disabled	COM2	On	Off
Disabled	Disabled	On	On

PARALLEL PORT CONFIGURATION		
LPT	SW2/switch 7	SW2/Switch 8
í LPT1	Off	Off
LPT2	Off	On
LPT3	On	Off
Disabled	On	On