


PRACTICAL ENHANCED LOGIC, CORP. PEL - 1600 SERIES

Q3/95

Data bus: 16-bit ISA
 Size: Three-quarter-length, full-height card
 Hard drive supported: Up to seven SCSI drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

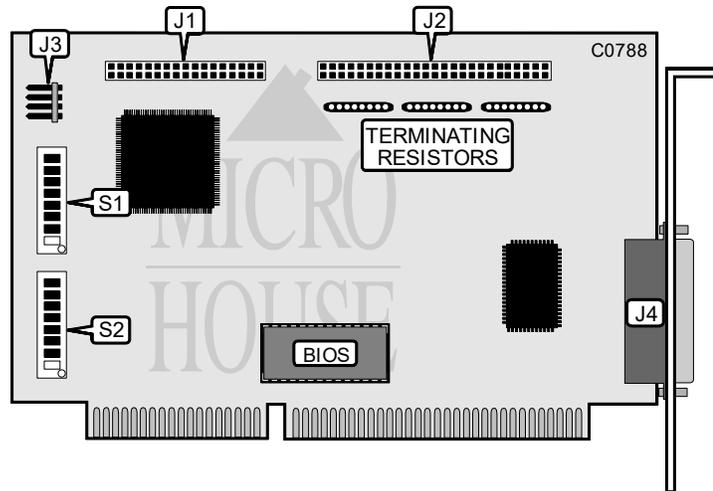

CONNECTIONS	
Function	Location
34-pin cable connector - floppy drive	J1
50-pin SCSI connector - internal	J2
4-pin connector - drive active LED	J3
25-pin parallel port - external	J4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
<input type="checkbox"/> Factory configured - do not alter	S1/1	off
<input type="checkbox"/> Factory configured - do not alter	S1/2	off
<input type="checkbox"/> Factory configured - do not alter	S1/3	off
<input type="checkbox"/> Factory configured - do not alter	S1/4	off
<input type="checkbox"/> Floppy drive enabled	S1/5	on
<input type="checkbox"/> Floppy drive disabled	S1/5	off
<input type="checkbox"/> SCSI termination enabled	S2/7	on
<input type="checkbox"/> SCSI termination disabled	S2/7	off
<input type="checkbox"/> Parallel port address is 340h - 350h	S2/8	off
<input type="checkbox"/> Parallel port address is 140h - 150h	S2/8	on

Continued on next page. . .

**PRACTICAL ENHANCED LOGIC, CORP.
 PEL - 1600 SERIES**

...continued from previous page

BIOS ADDRESS SELECTION			
Address	S1/6	S1/7	S1/8
C800h - CBFFh	off	off	off
CC00h - CFFFh	on	off	off
D000h - D3FFh	off	on	off
D400h - D7FFh	on	on	off
D800h - DBFFh	off	off	on
DC00h - DFFFh	on	off	on
Disabled	off	on	on
Disabled	on	on	on

INTERRUPT SELECTION						
IRQ	S2/1	S2/2	S2/3	S2/4	S2/5	S2/6
11	off	off	on	off	off	off
5	on	off	off	off	off	off
10	off	on	off	off	off	off
12	off	off	off	on	off	off
14	off	off	off	off	on	off
15	off	off	off	off	off	on