


SUMO SYSTEMS / STORAGE PLUS, INC. SPI300

Q3/95

Data bus: 16-bit ISA
 Size: Half-length, full-height card
 Hard drive supported: Unidentified
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

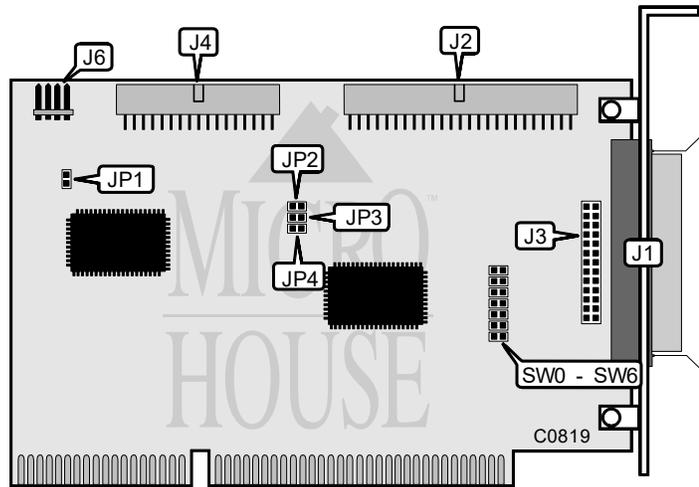

CONNECTIONS	
Function	Location
50-pin SCSI connector - external	J1
50-pin SCSI connector - internal	J2
26-pin SCSI connector - internal	J3
34-pin control cable connector - floppy drive	J4
4-pin connector - drive active LED	J6

Continued on next page . . .

SUMO SYSTEMS / STORAGE PLUS, INC.

SPI300

...continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy controller enabled	JP1	open
Floppy controller disabled	JP1	closed
í I/O base address is 330h - 33Fh	JP2	open
I/O base address is 230h - 23Fh	JP2	closed
í FDISK enabled for drive 2	SW0	open
Use ZDRV.SYS device driver for drive 2	SW0	closed
í DMA channel 7 select	SW1	open
DMA channel 6 select	SW1	closed
í Factory configured - do not alter	SW2	N/A
í IRQ15 select	SW3	open
IRQ14 select	SW3	closed
í 17 sectors/track select	SW4	open
32 sectors/track & 64 heads /cylinder select	SW4	closed
í ISA compatible timing selected	SW5	open
EISA compatible timing selected	SW5	closed
í Factory configured - do not alter	SW6	N/A

MEMORY BASE ADDRESS SELECTION		
Address	JP3	JP4
í DC000h	closed	closed
C8000h	open	open
CC000h	closed	open
D8000h	open	closed