


# MAYNARD ELECTRONICS 4100M

Q4/95

Data bus: 8-bit, ISA  
 Size: Half-length, full-height card  
 Hard drive supported: N/A  
 Floppy drives supported: None

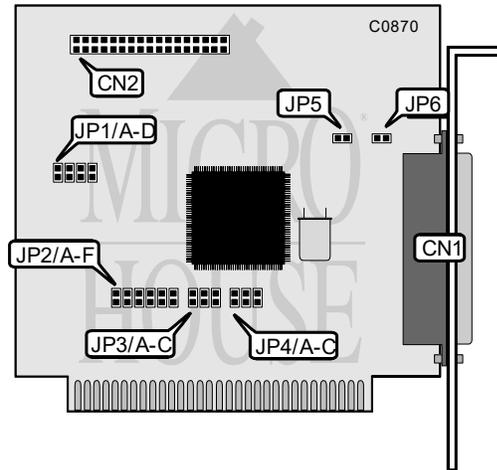

CONNECTIONS	
Function	Location
25-pin connector - tape drive connector - external	CN1
34-pin connector - tape drive connector - internal	CN2

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Factory configured - do not alter	JP5	closed
Factory configured - do not alter	JP6	closed

DMA CHANNEL SELECTION						
DMA	JP3/A	JP3/B	JP3/C	JP4/A	JP4/B	JP4/C
2	open	closed	open	open	closed	open
1	closed	open	open	closed	open	open
3	open	open	closed	open	open	closed

Continued on next page...

**MAYNARD ELECTRONICS**  
**4100M**

...continued from previous page

INTERRUPT SELECTION						
IRQ	JP2/A	JP2/B	JP2/C	JP2/D	JP2/E	JP2/F
í 6	open	closed	open	open	open	open
2	open	open	open	open	open	closed
3	open	open	open	open	closed	open
4	open	open	open	closed	open	open
5	open	open	closed	open	open	open
7	closed	open	open	open	open	open

I/O ADDRESS SELECTION				
Address	JP1/A	JP1/B	JP1/C	JP1/D
í 3F0-3F7h	closed	open	open	open
370-377h	open	open	closed	open
3E0-3E7h	open	closed	open	open
360-367h	open	open	open	closed