


# ICL POWERARRAY, POWERCACHE POWERARRAY L, POWERCACHE L INTELLIGENT SCSI HOST ARRAY/CACHE ADAPTERS

Q2/96

Data bus: 32-bit EISA  
 Size: Full-length, full-height card  
 Hard drive supported: Up to seven SCSI-2 or Fast SCSI devices (POWERARRAY L, POWERCACHE L)  
 Up to fourteen SCSI-2 or Fast SCSI devices (POWERARRAY, POWERCACHE, INTELLIGENT SCSI HOST ARRAY/CACHE)  
 Floppy drives supported: None

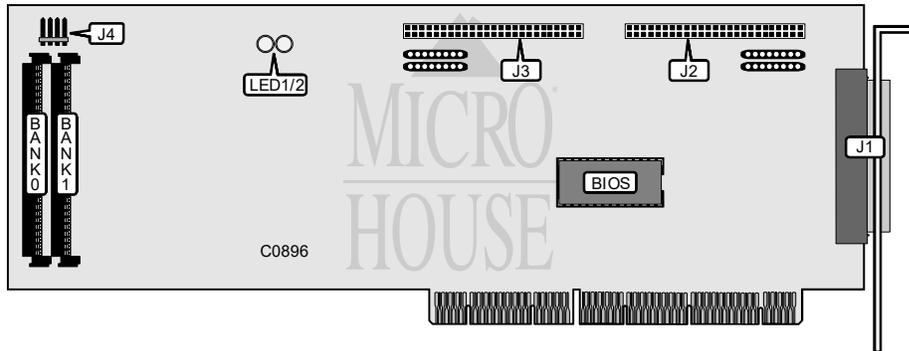

CONNECTIONS	
Function	Location
50-pin SCSI connector - external	J1
50-pin SCSI primary connector - internal	J2
50-pin SCSI secondary connector - internal	J3
4-pin connector - drive active LED	J4
Note: Positions of primary and secondary internal connectors may be reversed on some models.	

STATUS LED		
LED	Status	Function
LED1/2	green	board functioning
LED1/2	blinking red	board not functioning

DRAM CONFIGURATION		
Size	Bank 0/1	Bank 0/1
2 MB	(1) 256 x 36	(1) 256 x 36
8 MB	(1) 1M x 36	(1) 1M x 36

MISCELLANEOUS TECHNICAL NOTES
POWERARRAY/POWERCACHE model differences center on BIOS functionality. J4 orientation may vary.