


# UNIDENTIFIED TURBO MAINBOARD

<b>Processor</b>	8088
<b>Processor Speed</b>	4.77/10MHz
<b>Chip Set</b>	None
<b>Max. onboard DRAM</b>	640KB
<b>SRAM Cache</b>	None
<b>BIOS</b>	Unknown
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	8087

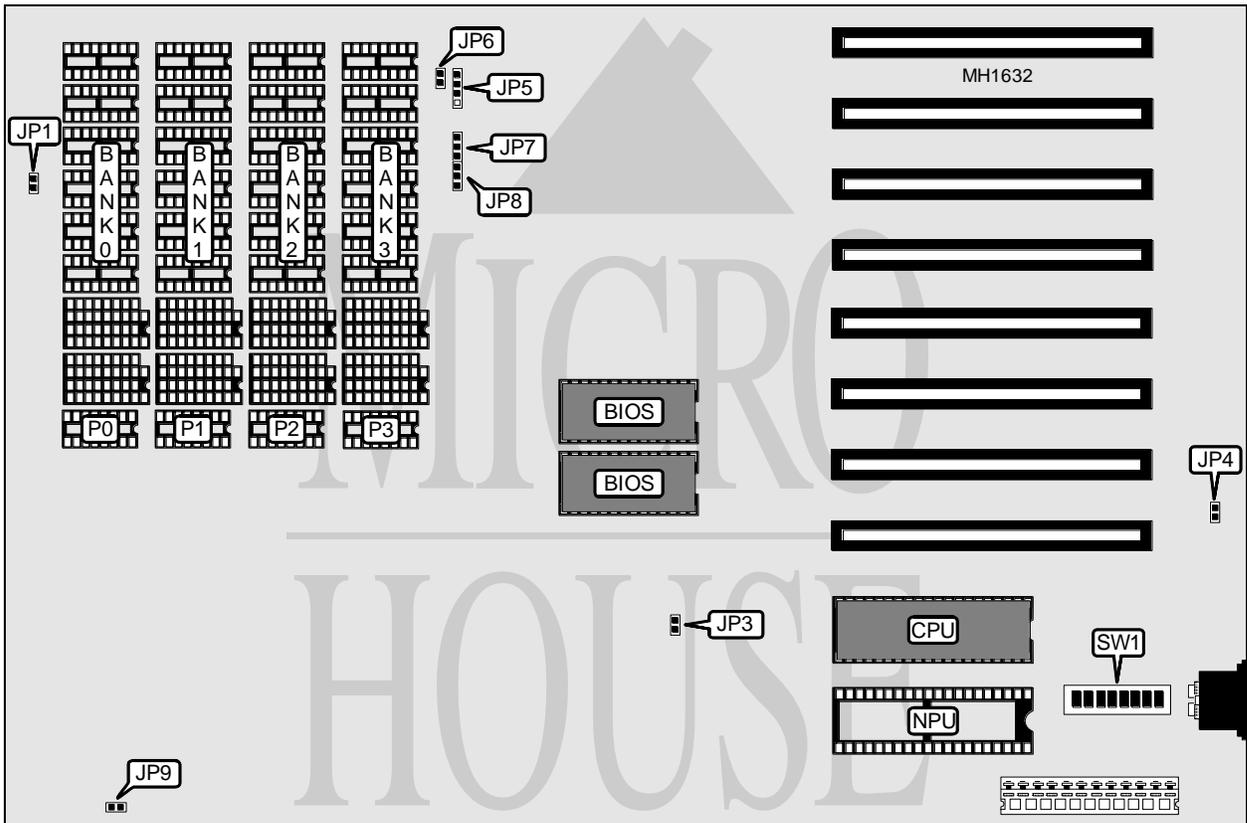

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	JP1	Power LED	JP5/1 & 2
Keylock	JP3	Turbo LED	JP5/3 & 4
Reset switch	JP4	Turbo Switch	JP6

Continued on next page . . .

# UNIDENTIFIED TURBO MAINBOARD

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Factory configured - do not alter	JP7	N/A
í Factory configured - do not alter	JP8	N/A
í Parity enabled	JP9	Closed
Parity disabled	JP9	Open
í Factory configured - do not alter	SW1/switch 1	Off
í NPU enabled	SW1/switch 2	Off
NPU disabled	SW1/switch 2	On
í Factory configured - do not alter	SW1/switch 3	N/A
í Factory configured - do not alter	SW1/switch 4	N/A

DRAM CONFIGURATION								
Size	Bank 0	Parity 0	Bank 1	Parity 1	Bank 2	Parity 2	Bank 3	Parity 3
256KB	(8)41256	(1)41256	NONE	NONE	NONE	NONE	NONE	NONE
256KB	(2)44256	(1)41256	NONE	NONE	NONE	NONE	NONE	NONE
512KB	(8)41256	(1)41256	(8)41256	(1)41256	NONE	NONE	NONE	NONE
512KB	(2)44256	(1)41256	(2)44256	(1)41256	NONE	NONE	NONE	NONE
576KB	(8)41256	(1)41256	(8)41256	(1)41256	(8)41256	(1)41256	NONE	NONE
576KB	(2)44256	(1)41256	(2)44256	(1)41256	(2)44256	(1)41256	NONE	NONE
640KB	(8)41256	(1)41256	(8)41256	(1)41256	(8)41256	(1)41256	(8)41256	(1)41256
640KB	(2)44256	(1)41256	(2)44256	(1)41256	(2)44256	(1)41256	(2)44256	(1)41256

Note: When using 44256 or 4464 chips, insert the chips into the dual-size sockets.

DISPLAY CONFIGURATION		
Type	SW1/switch 5	SW1/switch 6
Enhanced graphics adapter	On	On
Color/graphics (40 x 20 mode)	Off	On
Color/graphics (80 x 25 mode)	On	Off
Monochrome display adapter or both	Off	Off

DRIVE CONFIGURATION		
Numer of Installed Drives	SW1/switch 7	SW1/switch 8
1 Drive installed	On	On
2 Drives installed	Off	On
3 Drives installed	On	Off
4 Drives installed	Off	Off