


UNIDENTIFIED TURBO 10-V01

Processor 8088 (Exact location unknown)
Processor Speed 4.77/10MHz
Chip Set Unknown
Max. Onboard DRAM 640KB
Cache None
BIOS Unknown
Dimensions 330mm x 218mm
I/O Options None
NPU Options 8087 (Exact location unknown)

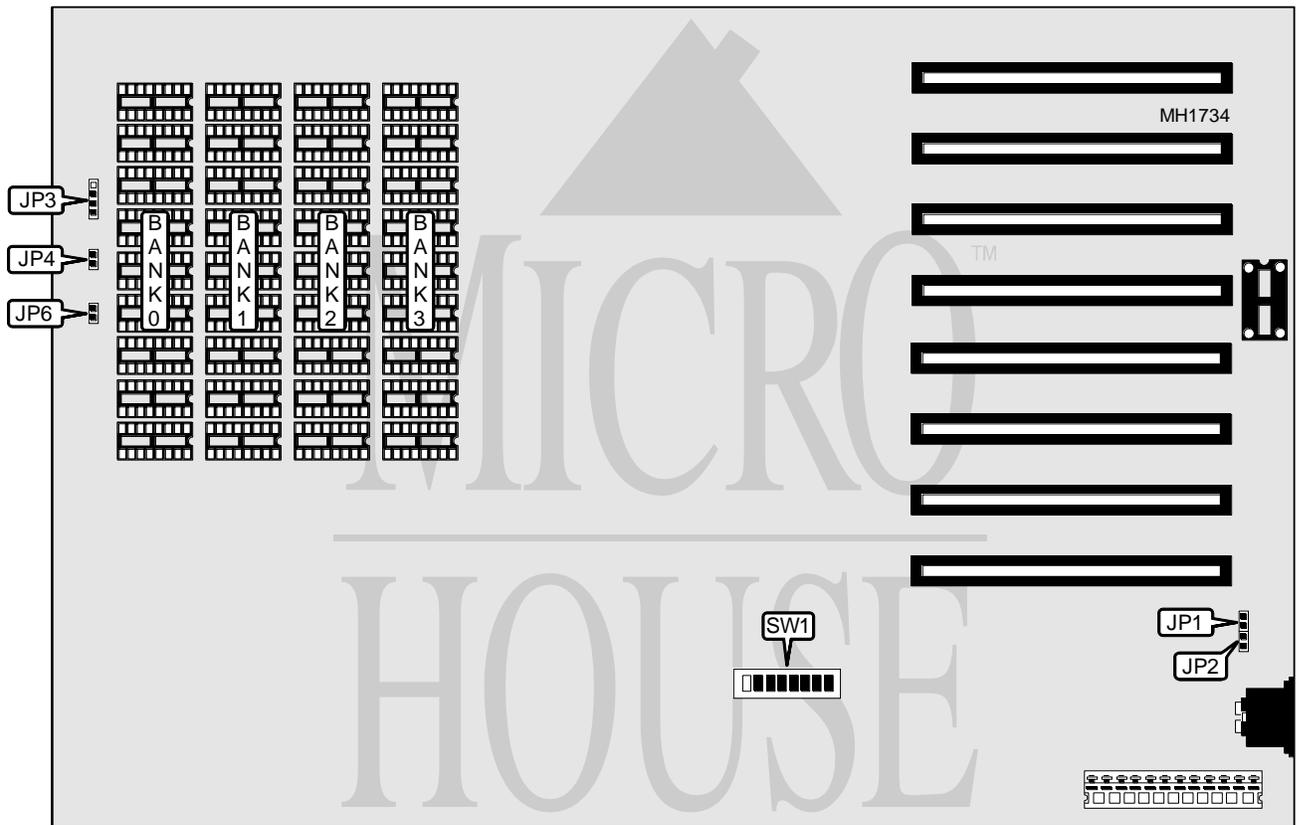

CONNECTIONS	
Purpose	Location
Turbo switch	JP5
Note: The location of JP5 is unknown.	

Continued on next page . . .

UNIDENTIFIED TURBO 10-V01

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í Factory configured - do not alter	SW1/switch 1	Off
í NPU enabled	SW1/switch 2	Off
NPU disabled	SW1/switch 2	On

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
256K	(9) 41256	NONE	NONE	NONE
512K	(9) 41256	(9) 41256	NONE	NONE
576K	(9) 41256	(9) 41256	(9) 4164	NONE
640K	(9) 41256	(9) 41256	(9) 4164	(9) 4164

MONITOR TYPE SELECTION		
Type	SW1/switch 5	SW1/switch 6
Enhanced graphics	On	On
Color 40 x 20	Off	On
Color 80 x 25	On	Off
Monochrome	Off	Off

FLOPPY DRIVE CONFIGURATION		
Number of drives	SW1/switch 7	SW1/switch 8
1	On	On
2	Off	On
3	On	Off
4	Off	Off

MISCELLANEOUS TECHNICAL NOTES
The settings and function of SW1/switch 3 and switch 4 are unknown. The functions of JP1, JP2, JP3, JP4, and JP6 on this board are unknown