


# INFORTREND TECHNOLOGY, INC. IFT-2000A

Q2/96

Data bus: 32-bit PCI  
 Size: Three-quarter length, full-height card  
 Hard drive supported: Up to seven Fast SCSI-2 devices  
 Floppy drives supported: None

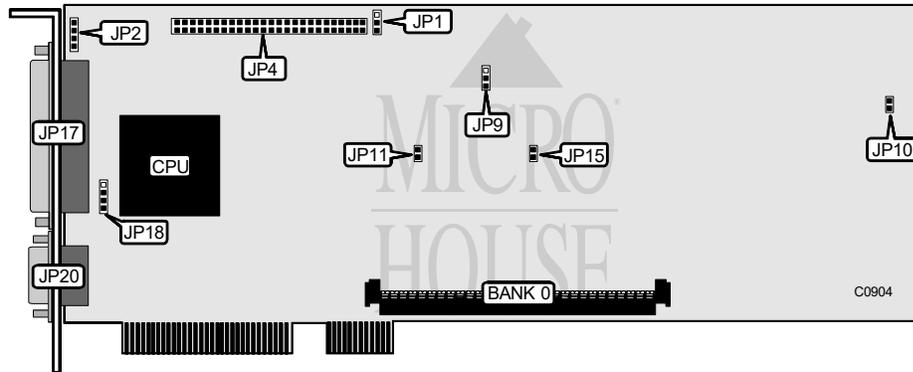

CONNECTIONS	
Function	Location
4-pin connector - drive active LED	JP2
50-pin SCSI connector - internal channel 0	JP4
50-pin SCSI connector - external channel 0	JP17
9-pin serial port - external	JP20

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Factory configured - do not alter	JP1	pins 1 & 2 closed
í Factory configured - do not alter	JP10	open
í Factory configured - do not alter	JP11	open
í Factory configured - do not alter	JP15	open

ONBOARD CPU SELECTION		
CPU	JP9	JP18
486SX-25	pins 1 & 2 closed	pins 2 & 3 closed
486DX-25	pins 1 & 2 closed	pins 1 & 2, 3 & 4 closed
486SX-33	pins 2 & 3 closed	pins 2 & 3 closed
486DX-33	pins 2 & 3 closed	pins 1 & 2, 3 & 4 closed

Continued on next page. . .

INFORTREND TECHNOLOGY, INC.  
IFT-2000A

...continued from previous page

DRAM CONFIGURATIONS	
Size	Bank 0
2 MBytes	(1) 512K x 36
4 MBytes	(1) 1M x 36
8 MBytes	(1) 2M x 36
16 MBytes	(1) 4M x 36
32 MBytes	(1) 8M x 36
Note: Minimum of 2 MBytes DRAM must be installed with/without parity function. Minimum of 4 MBytes DRAM suggested for RAID-3 and RAID-5 configurations.	

MISCELLANEOUS NOTES
Pin 1 for jumpers JP1, JP9, JP18 are designated for diagram purposes only.