


# EPSON, INC. EQUITY II

<b>Processor</b>	8088
<b>Processor Speed</b>	4.77/7.16MHz
<b>Chip Set</b>	Epson
<b>Max. Onboard DRAM</b>	256KB
<b>Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	8087

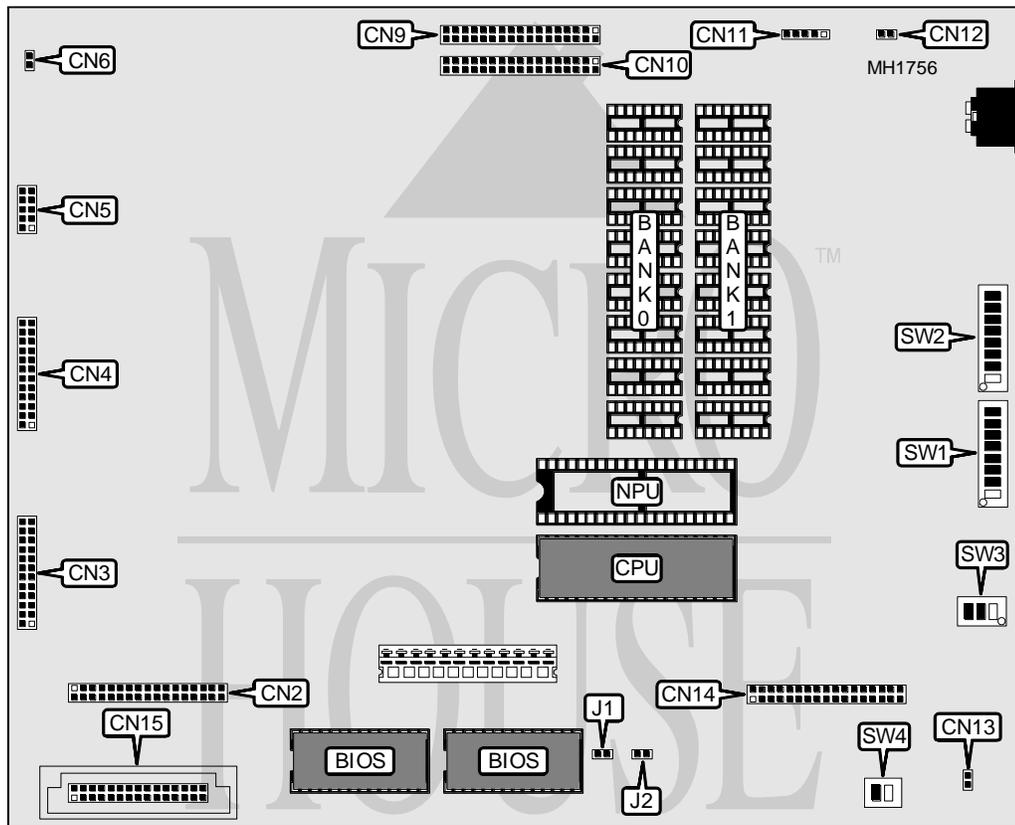

CONNECTIONS			
Purpose	Location	Purpose	Location
External memory card connector	CN2	Speaker	CN12
Parallel port	CN3	External battery	CN13
Serial port	CN4	32-bit external memory slot	CN14
Monitor port	CN5	Unknown	CN15
Composite video interface	CN6	32-bit card slot	S1
Floppy drive interface	CN9	32-bit card slot	S2
Floppy drive interface	CN10	32-bit card slot	S3
Power LED & keylock	CN11		

Continued on next page . . .

**EPSON, INC.**  
**EQUITY II**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í Floppy drive A 360KB installed	SW1/1	On
Floppy drive A 1.2MB installed	SW1/1	Off
í NPU enabled	SW1/2	Off
NPU disabled	SW1/2	On
í Factory configured - do not alter	SW1/3	Off
í Parallel port primary enabled	SW1/4	Off
Parallel port secondary enabled	SW1/4	On
í Factory configured - do not alter	SW2/1	Off
í Factory configured - do not alter	SW2/2	Off
í Factory configured - do not alter	SW2/3	Off
í Factory configured - do not alter	SW2/4	Off
Parity checking enabled	SW2/5	Off
Parity checking disabled	SW2/5	On
í Factory configured - do not alter	SW2/6	Off
Primary internal serial interface enabled	SW2/7	Off
Secondary internal serial interface enabled	SW2/7	On
Internal serial interface enabled	SW2/8	Off
Internal serial interface disabled	SW2/8	On
í Factory configured - do not alter	SW3	N/A
í Factory configured - do not alter	SW4	On

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
640KB	(8) 4164	(8) 41256
Note: The exact locations of Bank 0 and Bank 1 are unknown.		

DMA INTERRUPT CONFIGURATION		
DMA	J1	J2
Dack 0 enabled	pins 1 & 2 closed	pins 1 & 2 closed
Dack 0 disabled	pins 2 & 3 closed	pins 2 & 3 closed

MONITOR TYPE SELECTION		
Type	SW1/switch 5	SW1/switch 6
Internal video disabled	On	On
Monochrome	Off	Off
Color 40 x 25	Off	On
Color 80 x 25	On	Off

FLOPPY DRIVE CONFIGURATION		
Number of drives	SW1/switch 7	SW1/switch 8
1	On	On
2	Off	On