


COMPAQ COMPUTER CORPORATION

DESKPRO XL 450/466/560/566/590

Processor	80486DX2/Pentium (depends on CPU card installed)
Processor Speed	50(internal)/60/66(internal)/66MHz
Chip Set	Compaq
Max. Onboard DRAM	128MB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	External CPU card, 32-bit PCI bus slots (2), floppy drive interface, game port, IDE interface, parallel port, SCSI port, audio signal interface, PS/2 mouse port, serial ports (2), CD-ROM interface, audio ports (2), speaker/microphone port
NPU Options	None

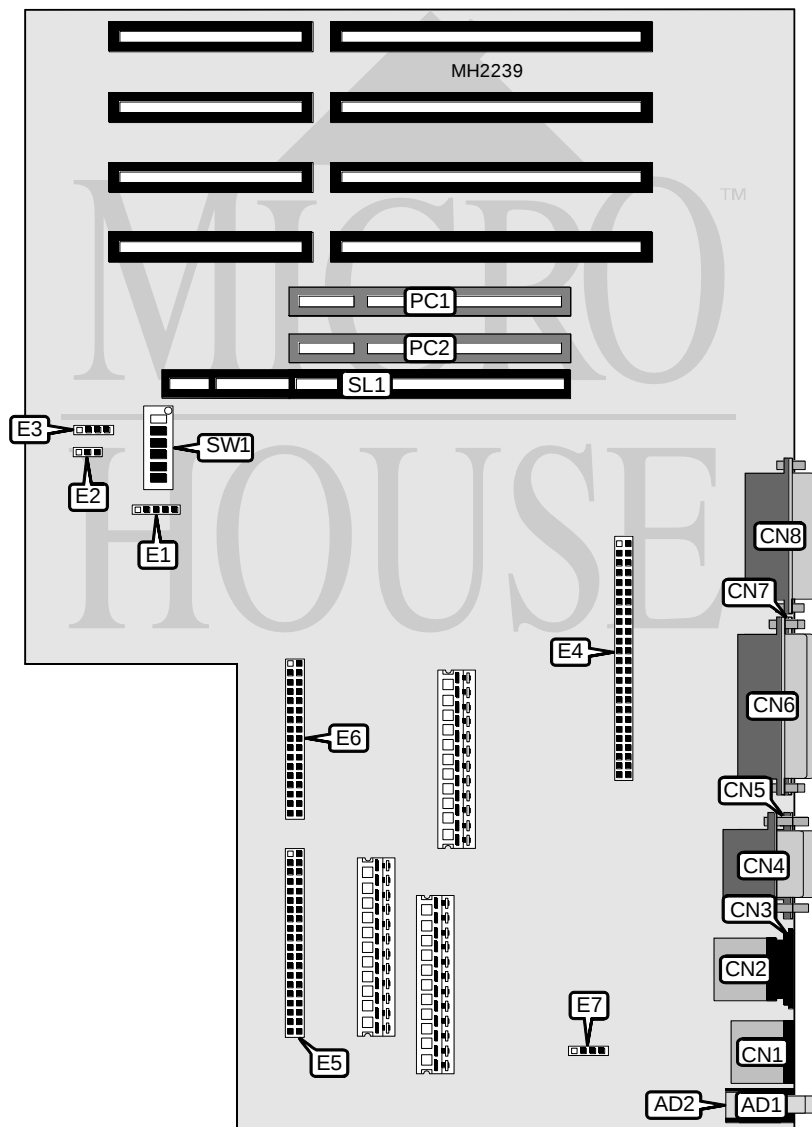

Continued next page. . .


COMPAQ COMPUTER CORPORATION

DESKPRO XL 450/466/560/566/590

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Audio port 1	AD1	Game port	CN8
Audio port 2	AD2	Chassis fan power	E1
Speaker/microphone connector	CN1	External battery	E3
PS/2 mouse port	CN2	Audio signal interface	E4
Keyboard connector	CN3	IDE interface	E5
Serial port 1	CN4	Floppy drive interface	E6
Serial port 2	CN5	Audio interface	E7
Parallel port	CN6	32-bit PCI bus slots	PC1 & PC2
SCSI port	CN7	External CPU slot	SL1

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Battery type select internal	E2	pins 2 & 3 closed
Battery type select external	E2	pins 1 & 2 closed
í Flash BIOS write protect enabled	SW1/1	Off
Flash BIOS write protect disabled	SW1/1	On
í EISA configuration changes enabled	SW1/2	Off
EISA configuration changes disabled	SW1/2	On
í Floppy drive read/write enabled	SW1/3	Off
Floppy drive read/write disabled	SW1/3	On
í EISA configuration diskette boot enabled	SW1/4	Off
EISA configuration diskette boot disabled	SW1/4	On
í Password enabled	SW1/5	Off
Password enabled	SW1/5	On
í EISA configuration normal	SW1/6	Off
EISA configuration erasable	SW1/6	On

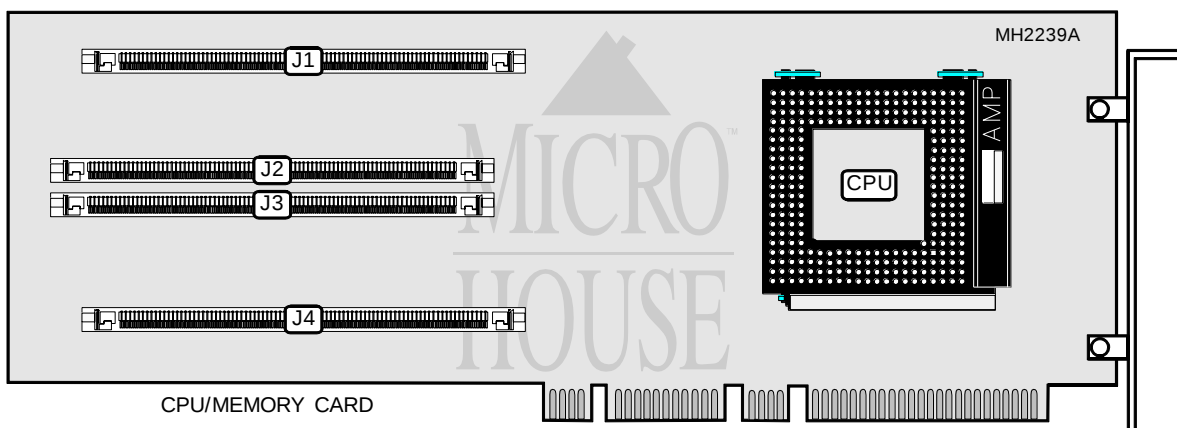

Continued next page. . .

COMPAQ COMPUTER CORPORATION

DESKPRO XL 450/466/560/566/590

... continued from previous page

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	(2) 256K x 36	NONE
4MB	(2) 256K x 36	(2) 256K x 36
4MB	(2) 512K x 36	NONE
6MB	(2) 256K x 36	(2) 512K x 36
8MB	(2) 512K x 36	(2) 512K x 36
8MB	(2) 1M x 36	NONE
10MB	(2) 256K x 36	(2) 1M x 36
12MB	(2) 512K x 36	(2) 1M x 36
16MB	(2) 1M x 36	(2) 1M x 36
18MB	(2) 256K x 36	(2) 2M x 36
20MB	(2) 512K x 36	(2) 2M x 36
24MB	(2) 1M x 36	(2) 2M x 36
32MB	(2) 4M x 36	NONE
34MB	(2) 256K x 36	(2) 4M x 36
36MB	(2) 512K x 36	(2) 4M x 36
40MB	(2) 1M x 36	(2) 4M x 36
64MB	(2) 4M x 36	(2) 4M x 36
64MB	(2) 8M x 36	NONE
66MB	(2) 256K x 36	(2) 8M x 36
68MB	(2) 512K x 36	(2) 8M x 36
72MB	(2) 1M x 36	(2) 8M x 36
96MB	(2) 4M x 36	(2) 8M x 36
128MB	(2) 8M x 36	(2) 8M x 36
Note: If 80486 board is installed, Bank 0 consists of J1 & J2 and Bank 1 consists of J3 & J4. If Pentium board is installed, Bank 0 consists of J1 & J3 and Bank 1 consists of J2 & J4.		