


UNIDENTIFIED SMART A2

Q2/96

Data bus: 16-bit ISA
 Size: Half-length, full-height card
 Hard drive supported: Two IDE(AT) drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

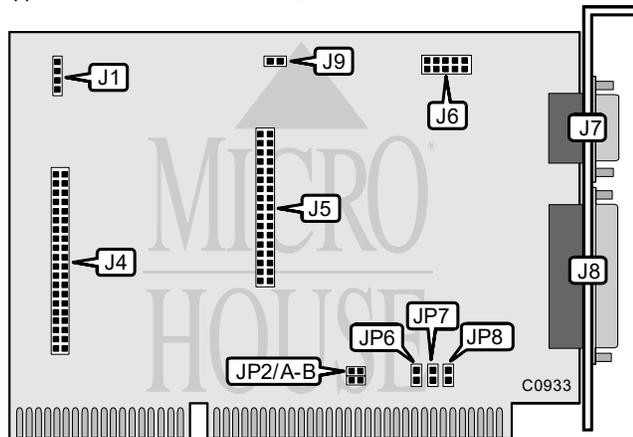

CONNECTIONS	
Function	Location
4-pin connector - drive active LED	J1
40-pin primary IDE(AT) connector	J4
34-pin cable connector - floppy drive	J5
10-pin serial port 2 - internal	J6
9-pin serial port 1 - external	J7
25-pin parallel port - external	J8

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Floppy drive address select 3F0h-3F7h	J9	open
Floppy drive address select 370h-377h	J9	closed
IDE(AT) interface enabled	JP2/A	open
IDE(AT) interface disabled	JP2/A	closed
Floppy drive interface enabled	JP2/B	open
Floppy drive interface disabled	JP2/B	closed
Serial port 1 enabled	JP6	closed
Serial port 1 disabled	JP6	open
Serial port 2 enabled	JP7	closed
Serial port 2 disabled	JP7	open
Parallel port LPT1 enable	JP8	closed
Parallel port LPT1 disable	JP8	open