


# APRICOT COMPUTERS LIMITED LS PRO (REV C) MOTHERBOARD

<b>Processor</b>	80486SX/80486DX2/80486DX4
<b>Processor Speed</b>	33/66(internal)/100(internal)MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	16MB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 200mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial port, VGA port, Ethernet connectors (3)
<b>NPU Options</b>	80487SX

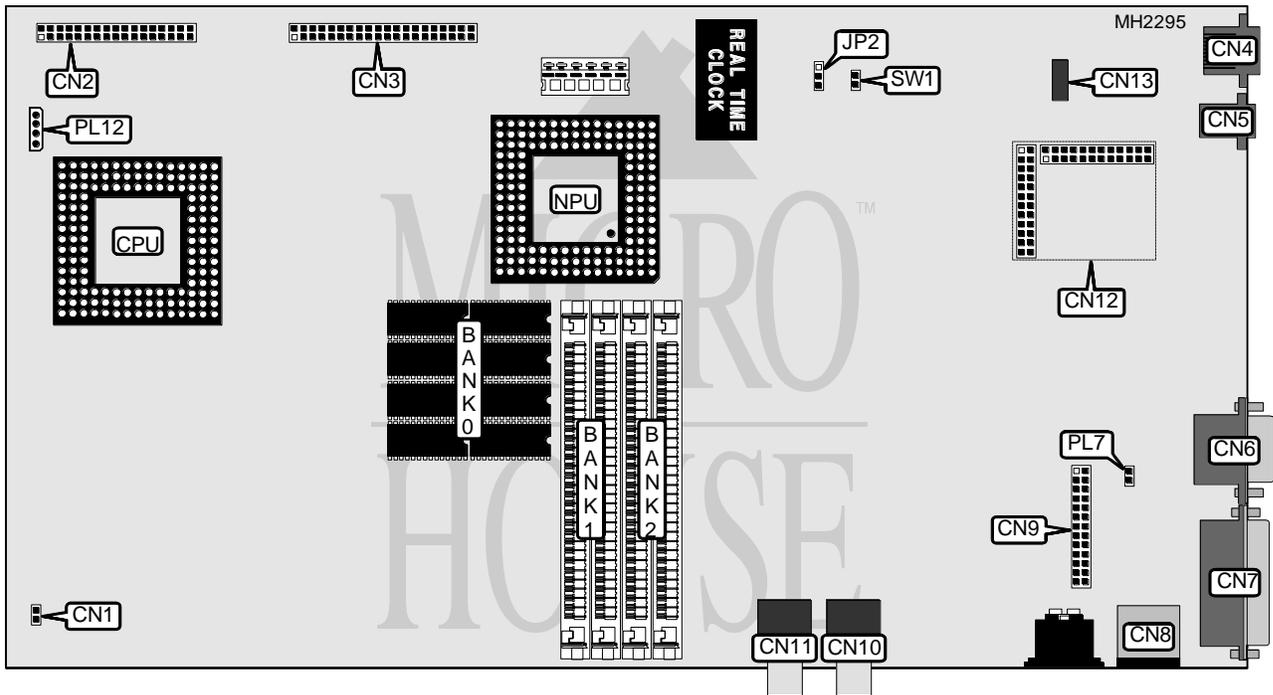

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	CN1	Parallel port	CN9
Floppy drive interface	CN2	Headphone port	CN10
IDE interface	CN3	Microphone port	CN11
Ethernet UTP port	CN4	Video memory upgrade connector	CN12
Ethernet thin port	CN5	Ethernet thick port	CN13
VGA port	CN6	Chassis fan power	PL7
Serial port	CN7	IDE power	PL12
PS/2 mouse port	CN8		

Continued on next page. . .

# APRICOT COMPUTERS LIMITED

## LS PRO (REV C) MOTHERBOARD

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	JP2	pins 2 & 3 closed
CMOS memory clear	JP2	pins 1 & 2 closed
í Ethernet cable type select thick	SW1	Open
Ethernet cable type select thin	SW1	Closed

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
4MB	(8) 411000	NONE	NONE
6MB	(8) 411000	(2) 1M x 9	NONE
8MB	(8) 411000	(2) 1M x 9	(2) 1M x 9
12MB	(8) 411000	(2) 4M x 9	NONE
16MB	(8) 411000	(2) 4M x 9	(2) 4M x 9
Note: Bank 0 is factory installed and is not configurable. When 16MB is installed, Bank 0 is automatically disabled.			