


ACCULOGIC, INC.

SIDE-3/PLUS (REV.2)

Q3/96

Data bus: 16-bit ISA
 Size: Half-length, full-height card
 Hard drive supported: Two IDE(AT) drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, 1.44MB, or 2.88MB drives

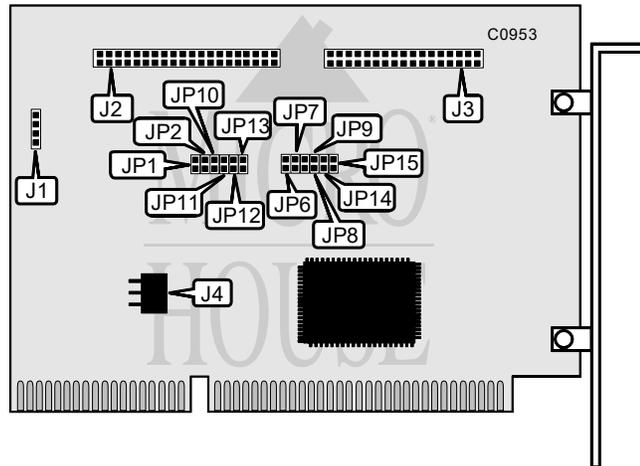

CONNECTIONS	
Function	Location
4-pin connector - drive active LED	J1
40-pin primary IDE(AT) connector	J2
34-pin cable connector - floppy drive	J3
Optional drive power connector	J4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
f Floppy drive interface enabled	JP6	Open
Floppy drive interface disabled	JP6	Closed
f IDE(AT) interface enabled	JP7	Open
IDE(AT) interface disabled	JP7	Closed
f Single speed floppy drives supported	JP8	Open
Dual speed floppy drives supported	JP8	Closed
f Floppy drive precompensation is 125 ns	JP9	Open
Floppy drive precompensation is 187 ns	JP9	Closed
f IOCHRDY signal disabled	JP10	Open
IOCHRDY signal enabled	JP10	Closed

Continued on next page. . .

**ACCULOGIC, INC.
SIDE-3/PLUS (REV.2)**

...continued from previous page

USER CONFIGURABLE SETTINGS (CONTINUED)		
Function	Location	Setting
í On-board BIOS ROM enabled	JP11	Open
On-board BIOS ROM disabled	JP11	Closed
í Primary floppy is any type other than 2.88 MB	JP14	Open
Primary floppy is 2.88 MB drive	JP14	Closed
í Secondary floppy is any type other than 2.88 MB	JP15	Open
Secondary floppy is 2.88 MB drive	JP15	Closed

INTERRUPT TIMING SELECTION		
Timing	JP1	JP2
í Normal	Closed	Open
Delayed until ACTIVE-signal is removed	Open	Closed

BIOS ADDRESS SELECTION		
Address	JP12	JP13
í C8000-CBFFFh	Open	Open
CC000-CFFFFh	Open	Closed
D8000-DBFFFh	Closed	Open
DC000-DFFFFh	Closed	Closed