


# ACCULOGIC, INC. ISAPORT

Q3/96

Data bus: 16-bit ISA  
 Size: Half-length, full-height card  
 Hard drive supported: Up to seven Fast SCSI-2 devices  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, 1.44MB, or 2.88MB drives

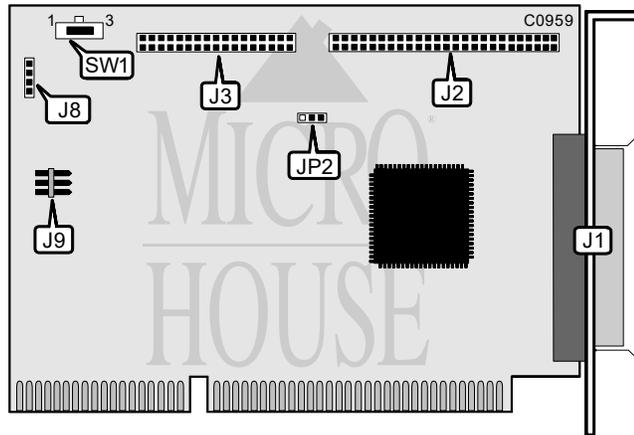

CONNECTIONS	
Function	Location
50-pin SCSI connector - external	J1
50-pin SCSI connector - internal	J2
34-pin cable connector - floppy drive	J3
4-pin power connector	J8
4-pin connector - drive active LED	J9

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
<input type="checkbox"/> Floppy drive interface enabled as primary <input type="checkbox"/> Floppy drive interface disabled	JP2	Pins 2 & 3 closed Pins 1 & 2 closed
<input type="checkbox"/> Normally configure board during installation <input type="checkbox"/> Lock configuration during installation <input type="checkbox"/> Reset configuration	SW1 SW1 SW1	Position 2 Position 1 Position 3
Note: SW1 is set to normal unless two ISAPort boards are installed on the same system. In this situation, the boards are installed sequentially. First, board 1 is installed and configured. Then, its SW1 is set to lock, and board 2 is installed and configured with its SW1 set to normal. The reset setting for SW1 is not identified.		